




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

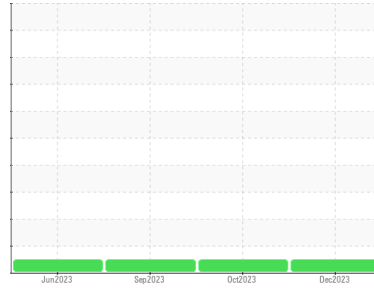

Area
[1494903]

Machine Id
2220

Component
Natural Gas Engine

Fluid
VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0849891 | WC0849758 | WC0849815 |
| Sample Date | Client Info | | | 07 Dec 2023 | 25 Oct 2023 | 07 Sep 2023 |
| Machine Age | kms | Client Info | | 34885 | 28630 | 18800 |
| Oil Age | kms | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | Changed | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >50 | 6 | 7 | 11 |
| Chromium | ppm | ASTM D5185(m) | >4 | 0 | 0 | <1 |
| Nickel | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >9 | 1 | <1 | 1 |
| Lead | ppm | ASTM D5185(m) | >30 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) | >35 | <1 | 1 | 2 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | | 24 | 19 | 9 |
| Barium | ppm | ASTM D5185(m) | | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 50 | 51 | 53 |
| Manganese | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185(m) | | 746 | 790 | 804 |
| Calcium | ppm | ASTM D5185(m) | | 1151 | 1164 | 1229 |
| Phosphorus | ppm | ASTM D5185(m) | | 656 | 672 | 699 |
| Zinc | ppm | ASTM D5185(m) | | 819 | 844 | 854 |
| Sulfur | ppm | ASTM D5185(m) | | 1906 | 1899 | 2009 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |


| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >+100 | 5 | 4 | 8 |
| Sodium | ppm | ASTM D5185(m) | | 3 | 3 | 2 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | 0 | 0 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 8.9 | 9.9 | 11.7 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 19.8 | 21.7 | 21.7 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 16.8 | 18.7 | 19.6 |











OIL ANALYSIS REPORT

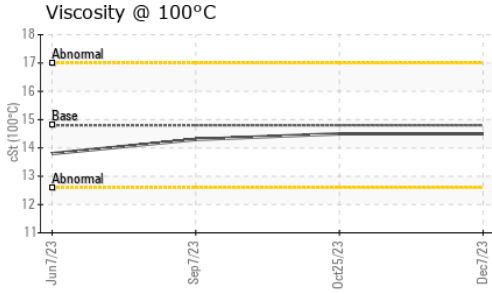

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- |
| Silt | scalar | Visual* | NONE | NONE | --- |
| Debris | scalar | Visual* | NONE | NONE | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 14.8 | 14.5 | 14.5 | 14.3 |

GRAPHS

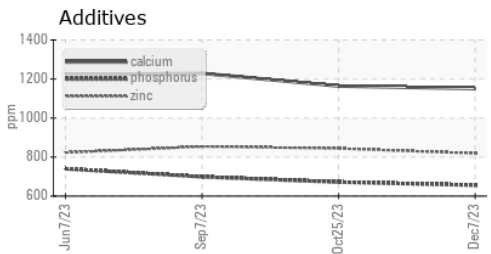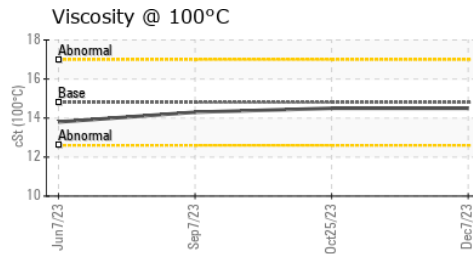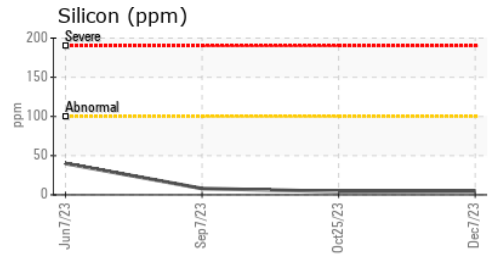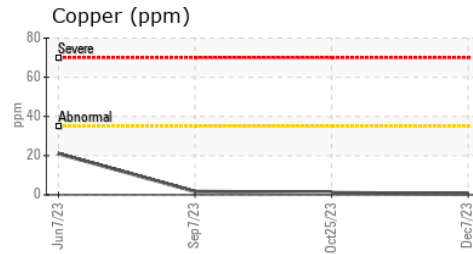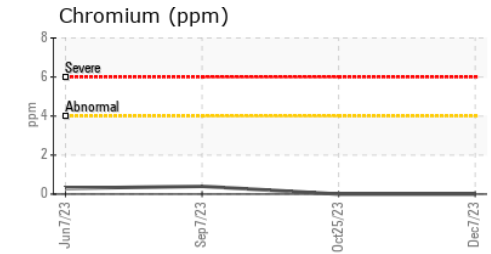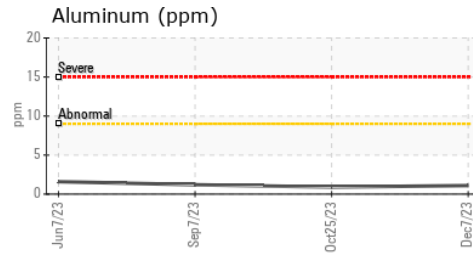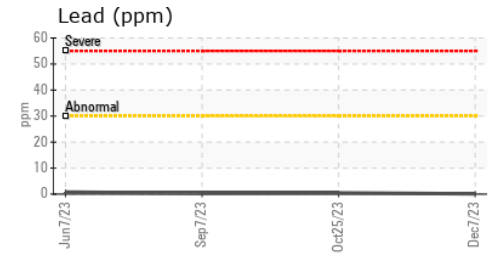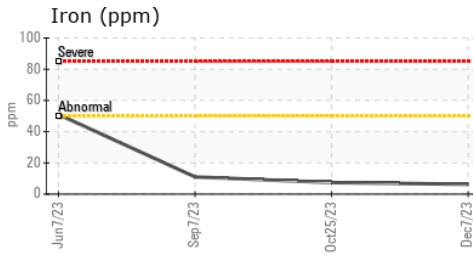

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0849891 **Received** : 12 Dec 2023
Lab Number : 02602500 **Diagnosed** : 12 Dec 2023
Unique Number : 5695585 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Ron Skinner
 ron.skinner@hamilton.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (905)679-4502