

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
PAUL'S MOBILE MECHANICS
Machine Id
RG6135G001583
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WA0017727	---	---
Sample Date	Client Info			15 Nov 2023	---	---
Machine Age	hrs	Client Info		19144	---	---
Oil Age	hrs	Client Info		604	---	---
Oil Changed	Client Info			Not Chngd	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>2.1	<1.0	---	---
Water	WC Method		>0.21	NEG	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	12	---	---
Chromium	ppm	ASTM D5185(m)	>11	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>31	<1	---	---
Lead	ppm	ASTM D5185(m)	>26	4	---	---
Copper	ppm	ASTM D5185(m)	>26	15	---	---
Tin	ppm	ASTM D5185(m)	>4	2	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	35	76	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	10	14	---	---
Calcium	ppm	ASTM D5185(m)	2340	2140	---	---
Phosphorus	ppm	ASTM D5185(m)	1110	916	---	---
Zinc	ppm	ASTM D5185(m)	1210	1131	---	---
Sulfur	ppm	ASTM D5185(m)	3890	2760	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	3	---	---
Sodium	ppm	ASTM D5185(m)	>31	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Glycol	%	ASTM D7922*		0.0	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.3	---	---

OIL ANALYSIS REPORT









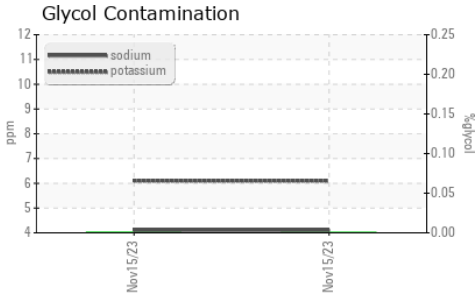


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.6	---

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	13.4	---

GRAPHS

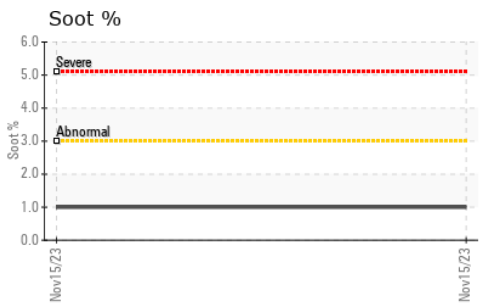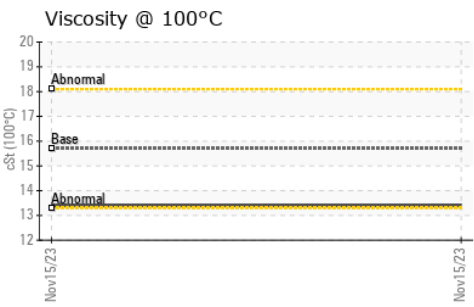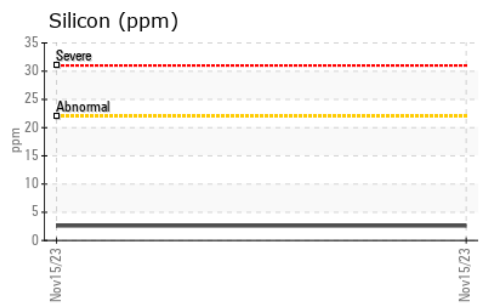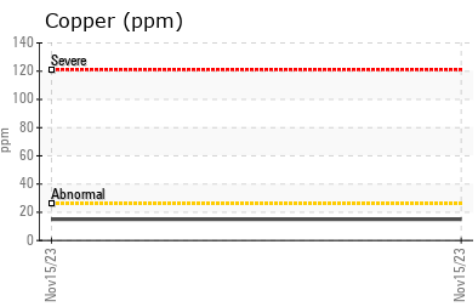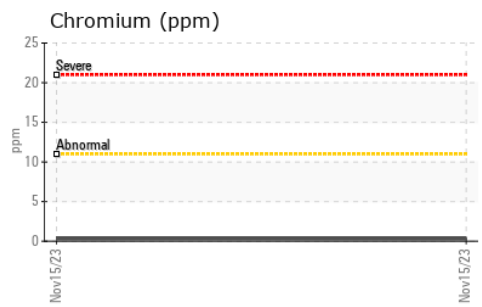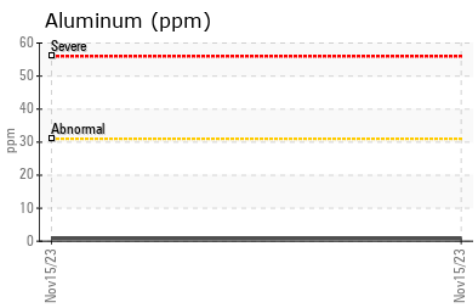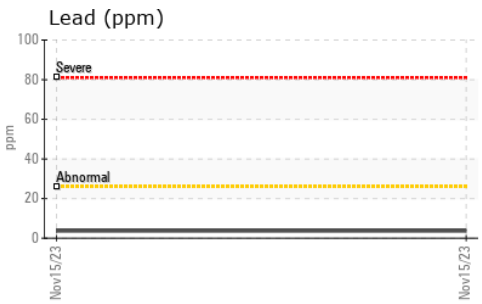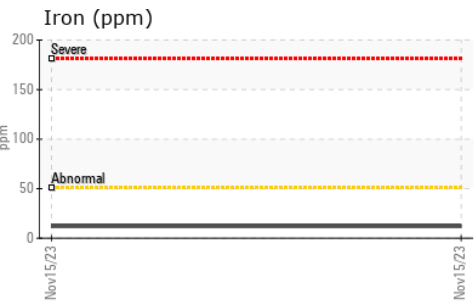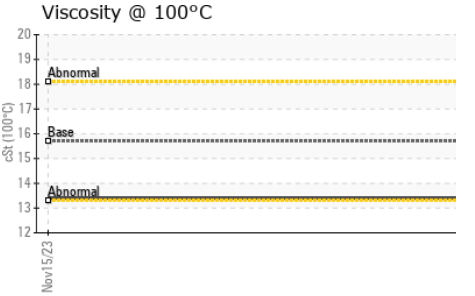

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0017727 **Received** : 12 Dec 2023
Lab Number : 02602524 **Diagnosed** : 12 Dec 2023
Unique Number : 5695609 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

Wajax Power Systems
 70 Raddall Avenue
 Dartmouth, NS
 CA B3B 1T7
 Contact: Danelle Hoffman
 dhoffman@wajax.com
 T: (902)468-6200
 F: (902)468-3325

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.