




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**[1494777]**  
 Machine Id  
**NEW FLYER 1830**  
 Component  
**Natural Gas Engine**  
 Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

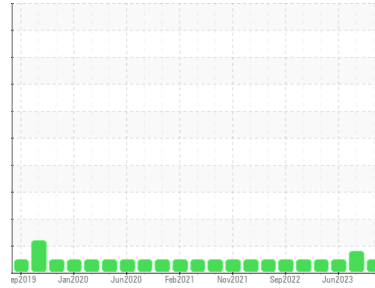

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0878121</b>	WC0849787	WC0811415
Sample Date	Client Info		<b>11 Dec 2023</b>	31 Aug 2023	15 Jun 2023
Machine Age	kms	Client Info	<b>334116</b>	315505	294009
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	MARGINAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>18</b>	17	18
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>2</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>23</b>	▲ 22	2
Copper	ppm	ASTM D5185(m)	>35	<b>1</b>	1	1
Tin	ppm	ASTM D5185(m)	>4	<b>2</b>	3	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>6</b>	4	6
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>63</b>	56	53
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185(m)		<b>936</b>	880	818
Calcium	ppm	ASTM D5185(m)		<b>1403</b>	1277	1263
Phosphorus	ppm	ASTM D5185(m)		<b>827</b>	750	696
Zinc	ppm	ASTM D5185(m)		<b>986</b>	900	825
Sulfur	ppm	ASTM D5185(m)		<b>2042</b>	1910	1923
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>10</b>	10	15
Sodium	ppm	ASTM D5185(m)		<b>5</b>	6	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>14.6</b>	13.0	12.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>28.5</b>	28.0	25.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>26.8</b>	25.3	23.1











# OIL ANALYSIS REPORT

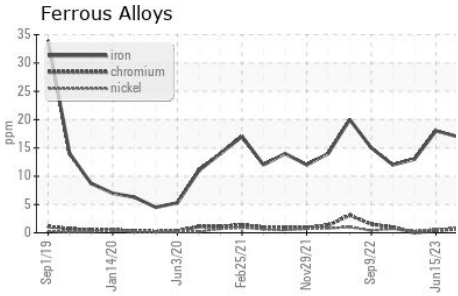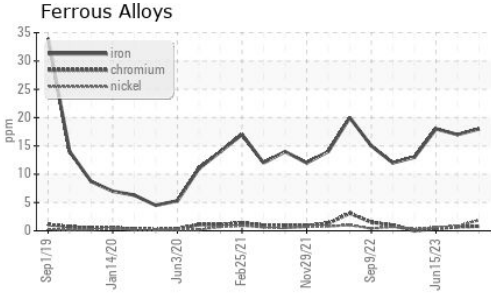

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.4	14.6

## GRAPHS

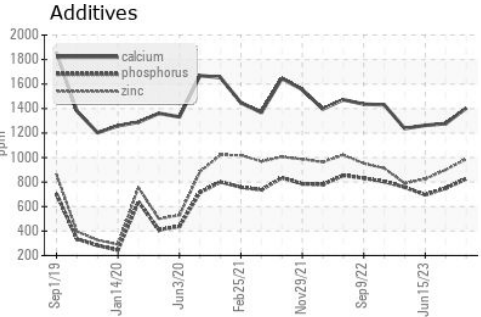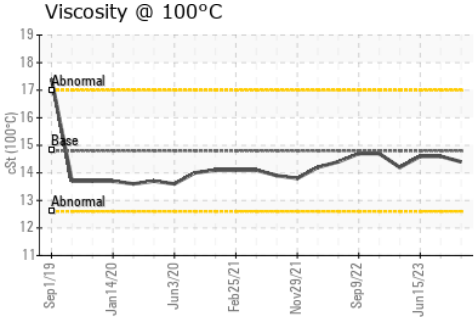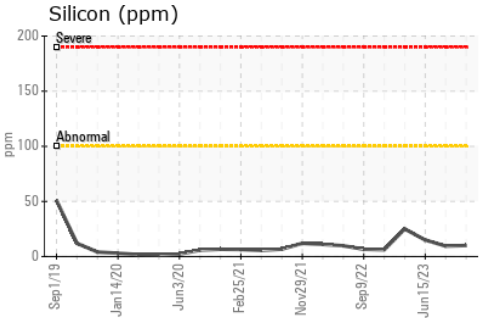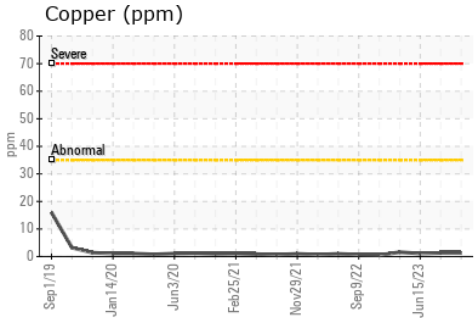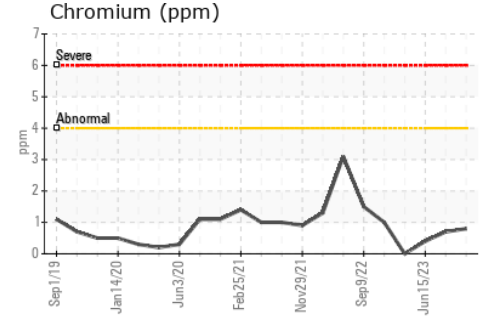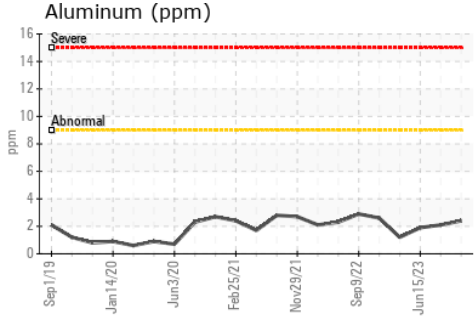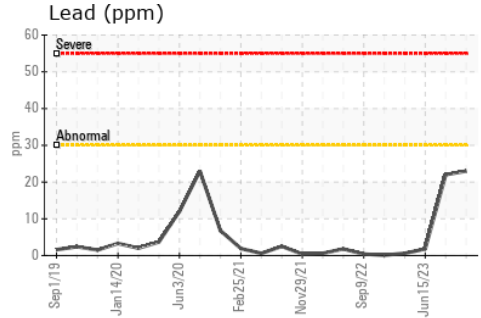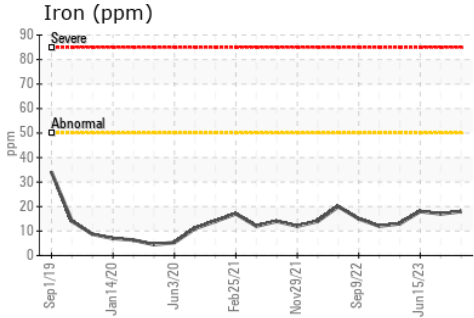

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0878121  
**Lab Number** : 02602556  
**Unique Number** : 5695641  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.