


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



QC230213IND2

Component

Hydraulic System

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1	
Grant EL INI OTTON Hiethod inhibitoase Current history i	history2
Sample Number Client Info WC0883409 WC0883408 WC	00883405
Sample Date Client Info 12 Dec 2023 11 Dec 2023 08	Dec 2023
Machine Age hrs Client Info 0 0	
Oil Age hrs Client Info 0 0	
Oil Changed Client Info N/A N/A N/A	Ą
Sample Status NORMAL NORMAL NO	RMAL
WEAR METALS method limit/base current history1	history2
Iron ppm ASTM D5185(m) >20 0 0	0
Chromium ppm ASTM D5185(m) >20 0 0	0
Nickel ppm ASTM D5185(m) >20 0 0	<1
Titanium ppm ASTM D5185(m) 0 0	0
Silver ppm ASTM D5185(m) <1 <1	<1
Aluminum ppm ASTM D5185(m) >20 <1 0	<1
Lead ppm ASTM D5185(m) >20 0 0	0
Copper ppm ASTM D5185(m) >20 0 <1	<1
Tin ppm ASTM D5185(m) >20 0 0	0
Antimony ppm ASTM D5185(m) 0 0	0
Vanadium ppm ASTM D5185(m) 0 0	0
Beryllium ppm ASTM D5185(m) 0 0	0
Cadmium ppm ASTM D5185(m) 0 0	0
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185(m) 5 <1 <1	<1
Barium ppm ASTM D5185(m) 5 <1 <1	<1
	0
Molybdenum ppm ASTM D5185(m) 5 0 0	0
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0	
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0	0
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43	0
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 33	0 0 43
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 35 Zinc ppm ASTM D5185(m) 370 427 417 44	0 0 43 330
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6	0 0 43 330 422
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6	0 0 43 330 422 686
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) <1 <1 <1	0 0 43 330 422 686 <1
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) <1 <1 <1 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0	0 0 43 330 422 686 <1
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) <1 <1 <1 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0 0 Sodium ppm ASTM D5185(m) 0 0 0	0 0 43 330 422 686 <1 history2
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) 2500 743 688 6 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0 0 Sodium ppm ASTM D5185(m) >20 0 0 0	0 0 43 3330 422 686 <1 history2
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1	0 0 43 3330 422 686 <1 history2 0 0
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) 2500 743 688 6 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0 0 Sodium ppm ASTM D5185(m) >20 0 0 0 Potassium ppm ASTM D6304* >0.05 0.003	0 0 43 3330 422 686 <1 history2 0 0 0
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) 2500 743 688 6 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0 0 Sodium ppm ASTM D5185(m) >20 0 0 0 Potassium ppm ASTM D5185(m) >20 0 <td>0 0 43 3330 422 686 <1 history2 0 0 0 0.002</td>	0 0 43 3330 422 686 <1 history2 0 0 0 0.002
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1 <1 0 Magnesium ppm ASTM D5185(m) 25 <1 <1 0 Calcium ppm ASTM D5185(m) 200 43 43 43 Phosphorus ppm ASTM D5185(m) 300 341 335 3 Zinc ppm ASTM D5185(m) 370 427 417 4 Sulfur ppm ASTM D5185(m) 2500 743 688 6 Lithium ppm ASTM D5185(m) 2500 743 688 6 CONTAMINANTS method limit/base current history1 Silicon ppm ASTM D5185(m) >15 0 0 0 Sodium ppm ASTM D5185(m) >20 0 0 0 Potassium ppm ASTM D6304* >0.05 0.00	0 0 43 330 422 686 <1 history2 0 0 0 0.002 16
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1	0 0 43 330 422 686 <1 history2 0 0 0 0 0.002 16 history2
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1	0 0 43 3330 422 686 <1 history2 0 0 0 0 0.002 16 history2
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1	0 0 43 3330 422 686 <1 history2 0 0 0 0.002 16 history2 91 31
Molybdenum ppm ASTM D5185(m) 5 0 0 0 Manganese ppm ASTM D5185(m) 25 <1	0 0 0 43 3330 4422 686 <1 history2 0 0 0 0 0 0 0 0 0 16 history2 91 331 7 22



OIL ANALYSIS REPORT

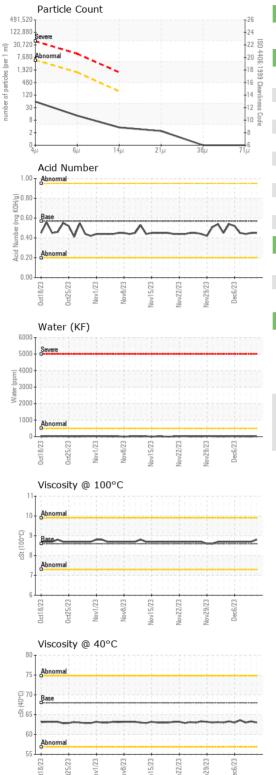

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.45	0.45	0.44
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	63.0	63.3	63.0
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.8	8.7	8.7
Viscosity Index (VI)	Scale	ASTM D2270*	96	113	110	110
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
					WC088	
Color				C 2 2 3		
					(A)	
Bottom						



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0883409 : 02602626

: 5695711

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 WearCheck Quality Control Sample Results Received

: 12 Dec 2023 Diagnosed : 13 Dec 2023 Diagnostician : Wes Davis

Burlington, ON CA

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

dorian.anderson@wearcheck.com T: (289)291-4652

Contact: Dorian Anderson

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: (905)569-8605