




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
GROUP SAVOIE
 Machine Id
VOLVO L120H 633191
 Component
Hydraulic System
 Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

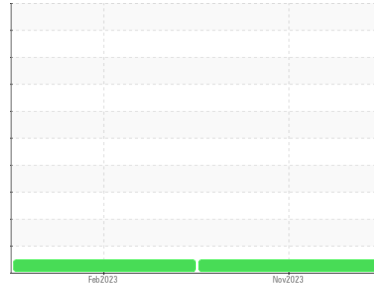

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0849237	VCP297565	---
Sample Date	Client Info		30 Nov 2023	02 Feb 2023	---
Machine Age	hrs	Client Info	5593	2158	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	4	6	---
Chromium	ppm	ASTM D5185(m) >20	0	<1	---
Nickel	ppm	ASTM D5185(m) >10	0	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	<1	0	---
Aluminum	ppm	ASTM D5185(m) >20	1	<1	---
Lead	ppm	ASTM D5185(m) >20	<1	<1	---
Copper	ppm	ASTM D5185(m) >20	1	2	---
Tin	ppm	ASTM D5185(m) >20	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 14	2	1	---
Barium	ppm	ASTM D5185(m) 0.0	<1	0	---
Molybdenum	ppm	ASTM D5185(m) 0.0	0	<1	---
Manganese	ppm	ASTM D5185(m) 0.0	0	0	---
Magnesium	ppm	ASTM D5185(m) 2.6	6	4	---
Calcium	ppm	ASTM D5185(m) 49	84	78	---
Phosphorus	ppm	ASTM D5185(m) 354	357	389	---
Zinc	ppm	ASTM D5185(m) 419	469	440	---
Sulfur	ppm	ASTM D5185(m) 3719	1123	1389	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	2	3	---
Sodium	ppm	ASTM D5185(m)	<1	<1	---
Potassium	ppm	ASTM D5185(m) >20	<1	1	---




OIL ANALYSIS REPORT

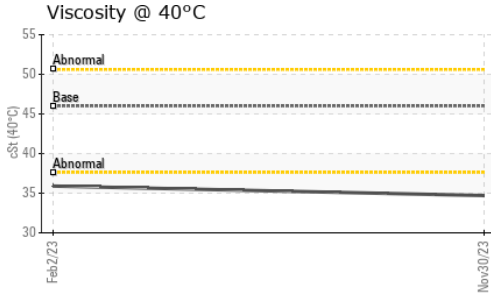


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46	34.7	35.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

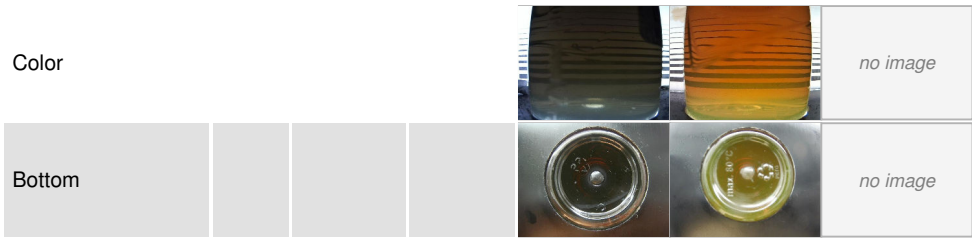

GRAPHS

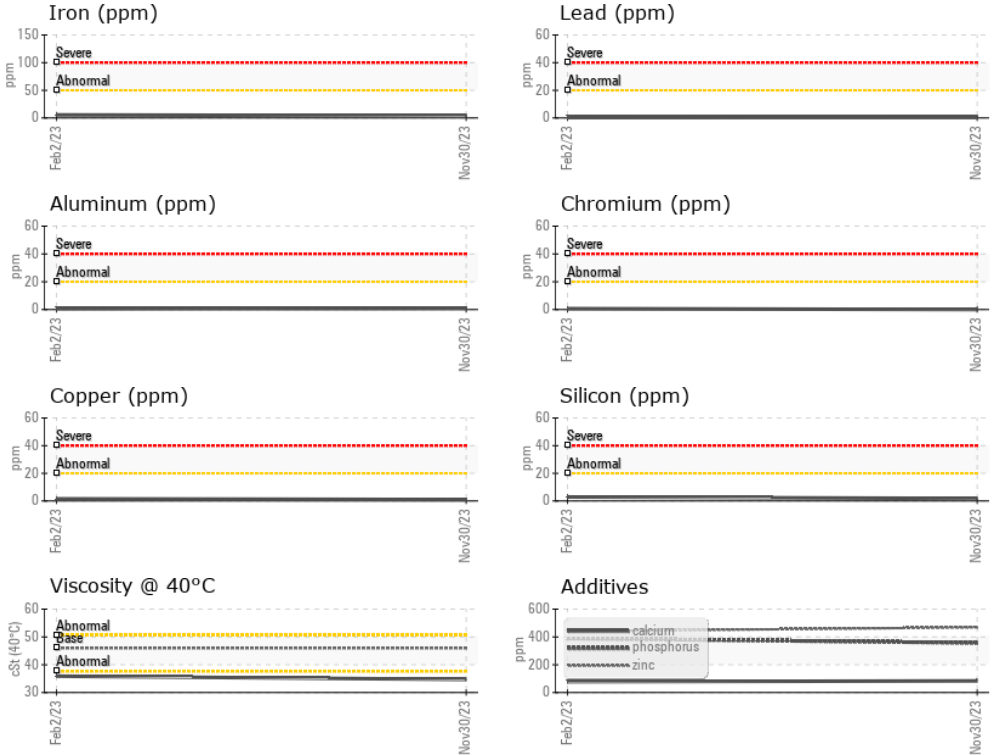

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0849237 **Received** : 12 Dec 2023
Lab Number : **02602646** **Diagnosed** : 12 Dec 2023
Unique Number : 5695731 **Diagnostician** : Wes Davis
Test Package : MOB 1

STRONGCO EQUIPMENT
 255 BAIG BOULEVARD
 MONCTON, NB
 CA E1E 1E1
 Contact: Greg Ward
 gward@strongco.com
 T: (506)857-8425
 F: (506)857-0851

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.