

## **OIL ANALYSIS REPORT**

Sample Rating Trend





### 2303 Component Diesel Engine Fluid DIESEL ENGINE OIL SAE 15W40 (--- GAL)

### DIAGNOSIS

## Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample.

## Wear

Metal levels are typical for a new component breaking in.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.


## Fluid Condition


The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0875094		
Sample Date		Client Info		12 Jun 2023		
Machine Age	kms	Client Info		14421		
Oil Age	kms	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	19		
Chromium	ppm	ASTM D5185(m)	>20	<1		
Nickel	ppm	ASTM D5185(m)	>4	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	>3	<1		
Aluminum	ppm	ASTM D5185(m)		2		
Lead	ppm	ASTM D5185(m)	>40	<1		
Copper	ppm	ASTM D5185(m)	>330	3		
Tin	ppm	ASTM D5185(m)	>15	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	15		
Barium	ppm	ASTM D5185(m)	10	<1		
Molybdenum	ppm	ASTM D5185(m)	100	13		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	450	122		
Calcium	ppm	ASTM D5185(m)	3000	2161		
Phosphorus	ppm	ASTM D5185(m)	1150	842		
Zinc	ppm	ASTM D5185(m)	1350	999		
Sulfur	ppm	ASTM D5185(m)	4250	2835		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5		
Sodium	ppm	ASTM D5185(m)	>158	2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Fuel	%	ASTM D7593*	>5	1.4		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1		
Nitration	Abs/cm	ASTM D7624*	>20	8.0		
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2		



# **OIL ANALYSIS REPORT**

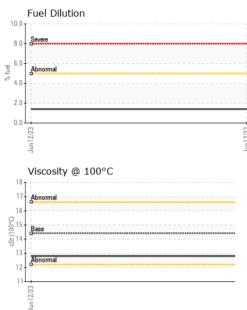

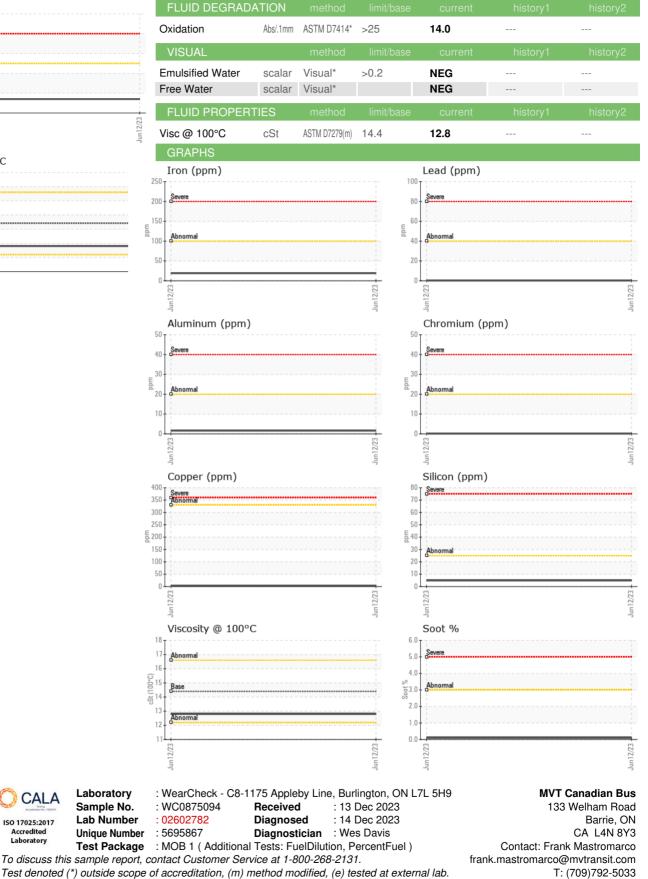

Report Id: MVTBAR [WCAMIS] 02602782 (Generated: 12/14/2023 09:27:30) Rev: 1

Validity of results and interpretation are based on the sample and information as supplied.

CALA

ISO 17025:2017 Accredited Laboratory

F: