




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

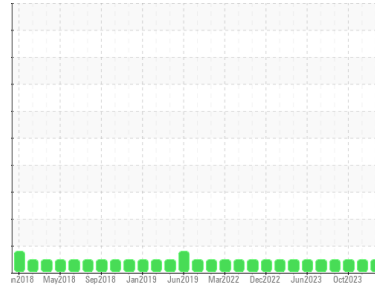

Machine Id
NOVA 1707
 Component
Diesel Engine
 Fluid
VALVOLINE 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0875104	WC0858021	WC0843558
Sample Date	Client Info			04 Dec 2023	02 Nov 2023	01 Oct 2023
Machine Age	kms	Client Info		513765	504551	495280
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	6	5	5
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	1	1
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	2	2	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	39	12	9	8
Barium	ppm	ASTM D5185(m)	1	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	49	10	8	8
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	616	56	37	26
Calcium	ppm	ASTM D5185(m)	1554	2099	2178	2200
Phosphorus	ppm	ASTM D5185(m)	899	804	818	866
Zinc	ppm	ASTM D5185(m)	1069	952	990	1011
Sulfur	ppm	ASTM D5185(m)	2624	2770	2846	2933
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	3	4
Sodium	ppm	ASTM D5185(m)		2	2	4
Potassium	ppm	ASTM D5185(m)	>20	0	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	7.5	7.9	8.1
Sulfation	Abs./1mm	ASTM D7415*	>30	19.1	19.9	20.0



OIL ANALYSIS REPORT

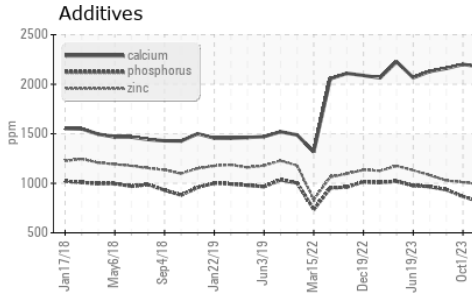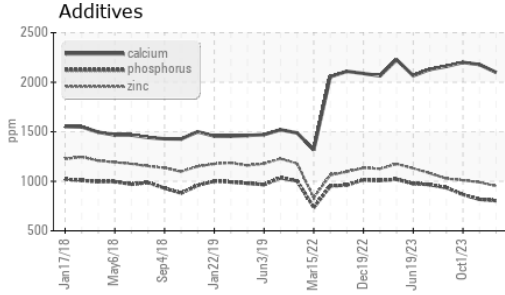

FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	13.6	14.1









VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	13.6	11.8	12.5

GRAPHS

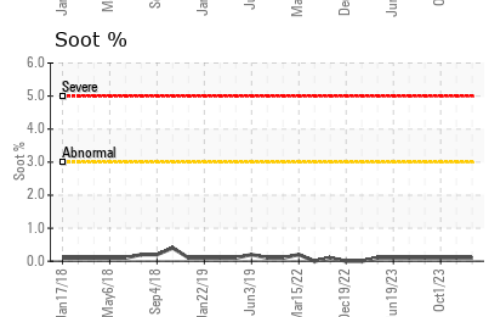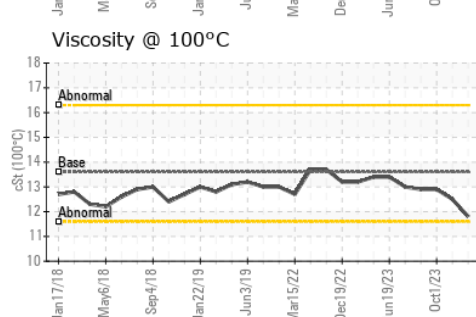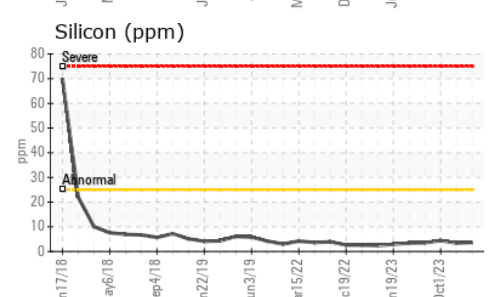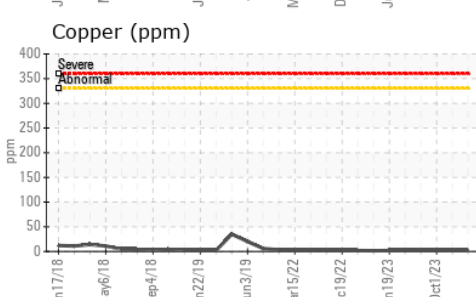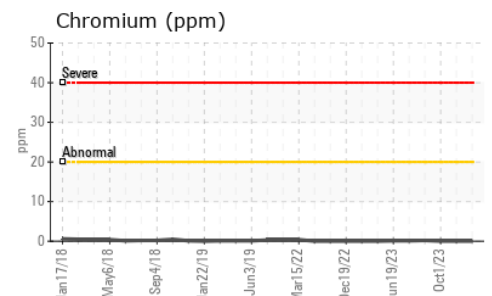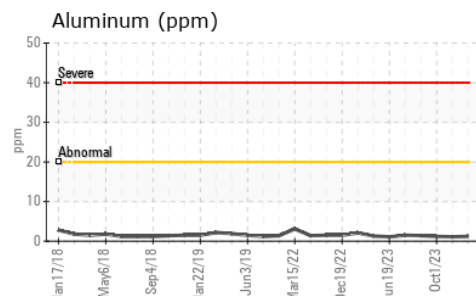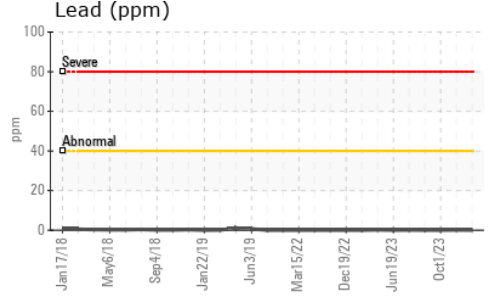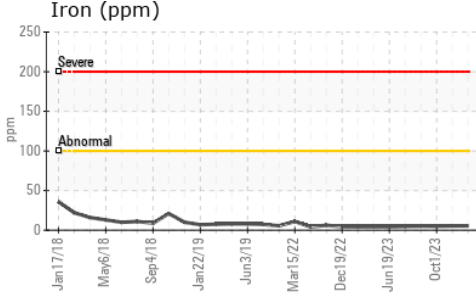

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0875104
Lab Number : 02602786
Unique Number : 5695871
Test Package : MOB 1

Received : 13 Dec 2023
Diagnosed : 13 Dec 2023
Diagnostician : Wes Davis

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3

Contact: Frank Mastromarco
 frank.mastromarco@mvttransit.com
 T: (709)792-5033
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.