



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
22BM175

Component
Rear Left Final Drive

Fluid
TEXACO PINNACLE EP 220 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0653374	---	---
Sample Date	Client Info		11 Dec 2023	---	---
Machine Age	hrs	Client Info	135	---	---
Oil Age	hrs	Client Info	135	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	175	---
Chromium	ppm	ASTM D5185(m)	>10	2	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---
Titanium	ppm	ASTM D5185(m)		0	---
Silver	ppm	ASTM D5185(m)		<1	---
Aluminum	ppm	ASTM D5185(m)	>25	10	---
Lead	ppm	ASTM D5185(m)	>25	173	---
Copper	ppm	ASTM D5185(m)	>50	7	---
Tin	ppm	ASTM D5185(m)	>10	0	---
Antimony	ppm	ASTM D5185(m)	>5	0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		10	---
Barium	ppm	ASTM D5185(m)		4	---
Molybdenum	ppm	ASTM D5185(m)		0	---
Manganese	ppm	ASTM D5185(m)		2	---
Magnesium	ppm	ASTM D5185(m)		5	---
Calcium	ppm	ASTM D5185(m)		17	---
Phosphorus	ppm	ASTM D5185(m)		369	---
Zinc	ppm	ASTM D5185(m)		14	---
Sulfur	ppm	ASTM D5185(m)		4678	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	36	---
Sodium	ppm	ASTM D5185(m)		11	---
Potassium	ppm	ASTM D5185(m)	>20	3	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.64	---



OIL ANALYSIS REPORT

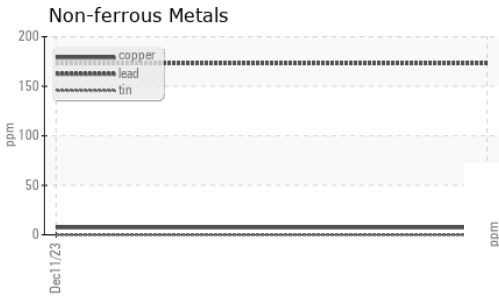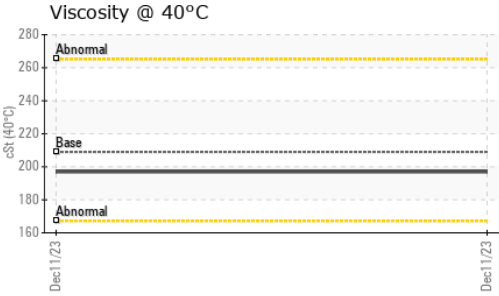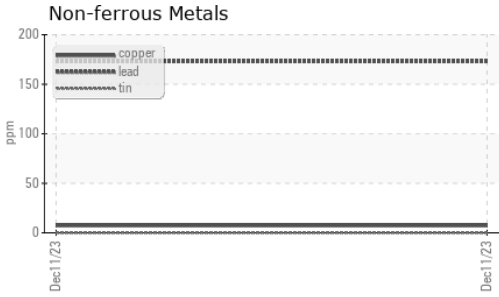









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	209	197	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

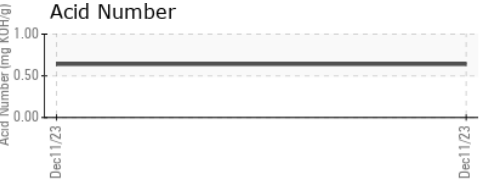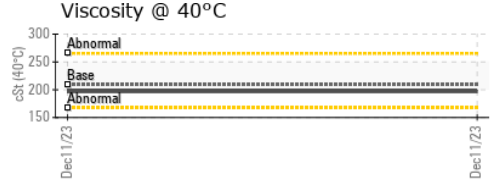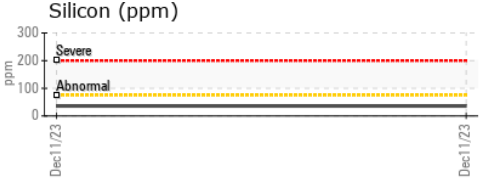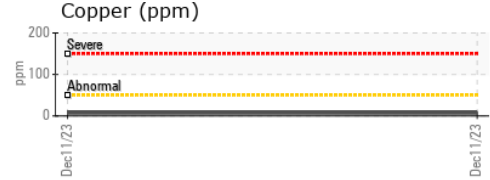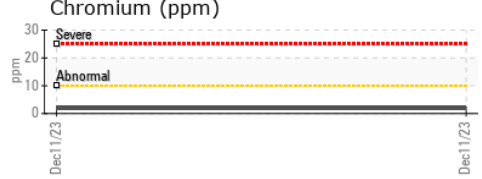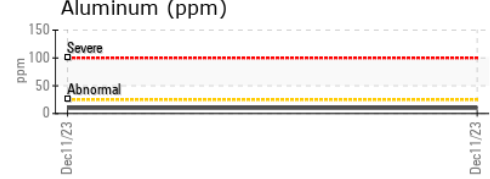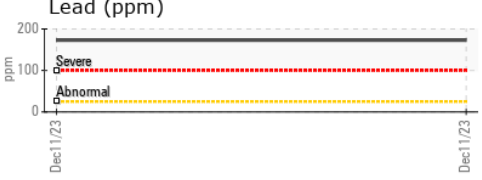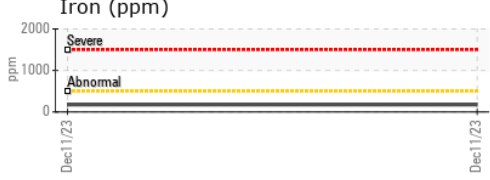

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0653374 **Received** : 13 Dec 2023
Lab Number : 02602915 **Diagnosed** : 14 Dec 2023
Unique Number : 5696000 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: TAN Man)

RWF Industries
 873 Devonshire Ave.
 Woodstock, ON
 CA N4S 8Z4
 Contact: Tami Arnold
 tamia@rwfbrn.com
 T:
 F: (519)421-0028

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.