




PROBLEM SUMMARY

Sample Rating Trend


COOLANT

Area
Engine room
 Machine Id
G5-2111 Main Engine #1 (S/N C481)
 Component
1 Main Engine
 Fluid
SHELL ROTELLA T 30 (810 LTR)

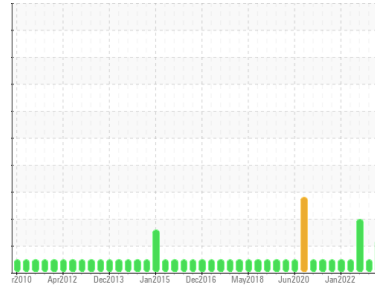

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

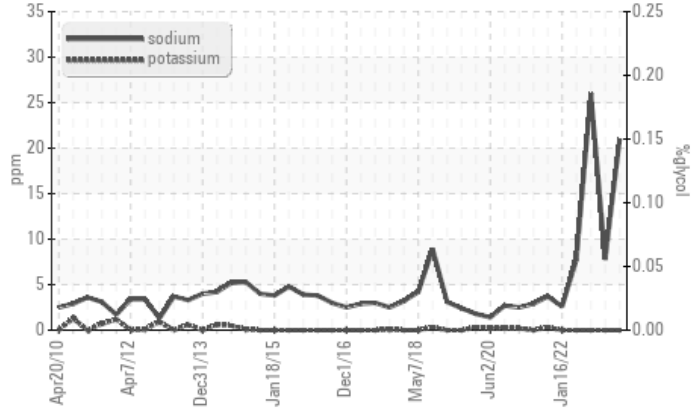

RECOMMENDATION

We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	ABNORMAL
Sodium	ppm	ASTM D5185(m)	>75	▲ 21	8	▲ 26

Customer Id: GRIFFON
 Sample No.: WC0855482
 Lab Number: 02603055
 Test Package: MAR 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

07 May 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



29 Nov 2022 Diag: Kevin Marson

COOLANT



We recommend an early resample to monitor this condition. Silver ppm levels are abnormal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. Water treatment chemicals present, indicating slow coolant leak. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



18 Mar 2022 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

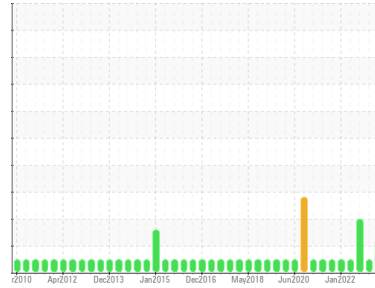

COOLANT



Area
Engine room
 Machine Id
G5-2111 Main Engine #1 (S/N C481)
 Component
1 Main Engine
 Fluid
SHELL ROTELLA T 30 (810 LTR)

DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition.

Wear

The ferrography results are normal indicating no abnormal wear in the system.

Contaminants

Water treatment chemicals present, indicating slow coolant leak. There is no indication of any contamination in the oil.

Oil Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0855482	WC0772116	WC0603808
Sample Date	Client Info		10 Dec 2023	07 May 2023	29 Nov 2022
Machine Age	hrs	Client Info	75240	74745	74173
Oil Age	hrs	Client Info	5099	4604	4032
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ATTENTION	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m) >75	5	3	5
Chromium	ppm	ASTM D5185(m) >8	1	<1	1
Nickel	ppm	ASTM D5185(m) >2	0	0	<1
Titanium	ppm	ASTM D5185(m) >3	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	0	▲ 2
Aluminum	ppm	ASTM D5185(m) >15	1	1	2
Lead	ppm	ASTM D5185(m) >18	<1	<1	<1
Copper	ppm	ASTM D5185(m) >80	4	5	10
Tin	ppm	ASTM D5185(m) >14	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	9	5	10
Barium	ppm	ASTM D5185(m)	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 0	126	119	117
Manganese	ppm	ASTM D5185(m)	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	20	25	24
Calcium	ppm	ASTM D5185(m) 1890	2826	2930	2830
Phosphorus	ppm	ASTM D5185(m) 680	1074	1173	1124
Zinc	ppm	ASTM D5185(m) 750	1245	1216	1183
Sulfur	ppm	ASTM D5185(m)	2744	2810	2731
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	3	2	4
Sodium	ppm	ASTM D5185(m) >75	▲ 21	8	▲ 26
Potassium	ppm	ASTM D5185(m) >20	0	0	0


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0.3	0	0
Nitration	Abs/cm	ASTM D7624* >20	4.3	4.1	4.5
Sulfation	Abs.:1mm	ASTM D7415* >30	14.7	14.5	15.5



OIL ANALYSIS REPORT

▲ Glycol Contamination

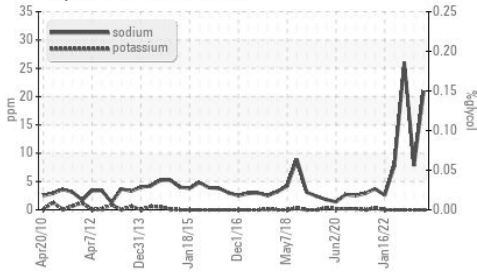


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	7.3	7.6	8.1
Base Number (BN)	mg KOH/g	ASTM D2896*	6.0	9.60	10.53	8.40

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	11.5	11.5	11.3	11.3

GRAPHS


Base Number

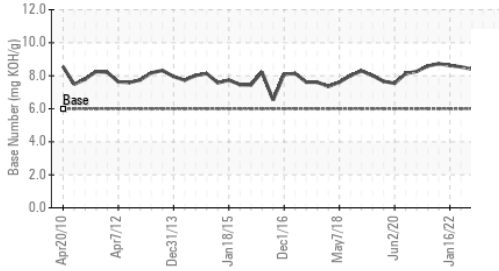


Ferrous Alloys

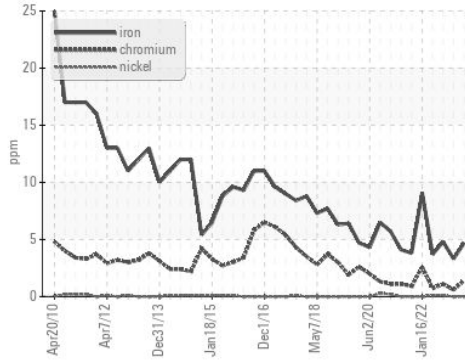


PQ

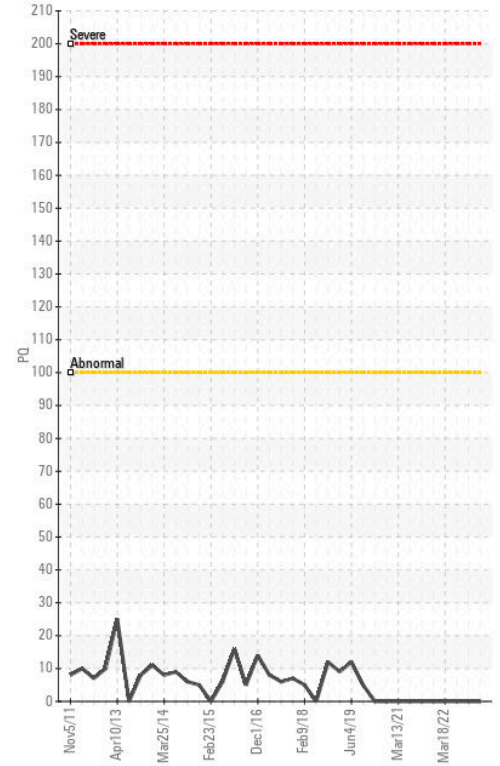


Viscosity @ 100°C

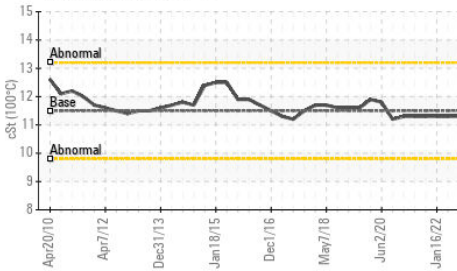


Non-ferrous Metals

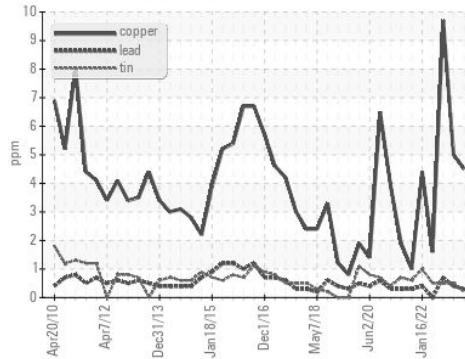


PQ

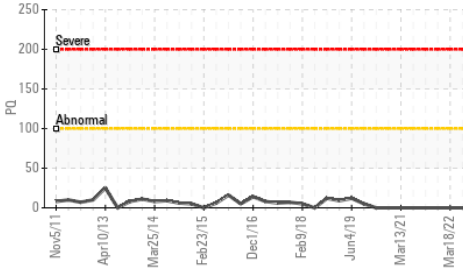

Viscosity @ 100°C

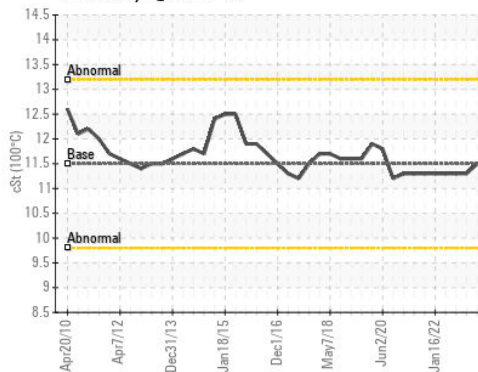

Base Number

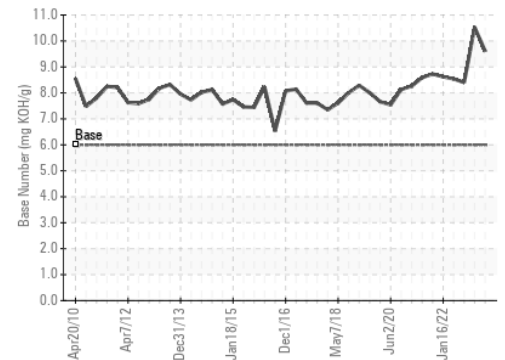




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0855482
Lab Number : 02603055
Unique Number : 5696140
Test Package : MAR 3

CANADIAN COAST GUARD
 CCGS GRIFFON, PO BOX 1000, 401 KING ST.W
 Prescott, ON
 CA K6V 5T3
 Contact: Laurie Bosley
 Laurie.Bosley@dfo-mpo.gc.ca
 T:
 F: (519)383-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Area
Engine room
 Machine Id
G5-2111 Main Engine #1 (S/N C481)
 Component
1 Main Engine
 Fluid
SHELL ROTELLA T 30 (810 LTR)

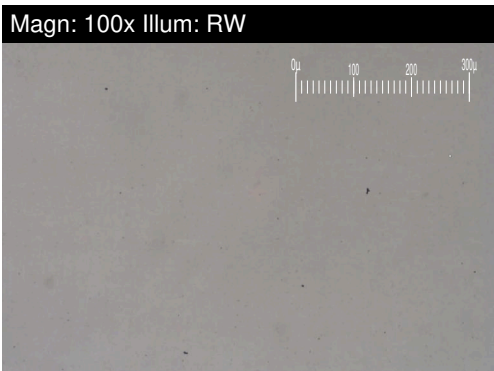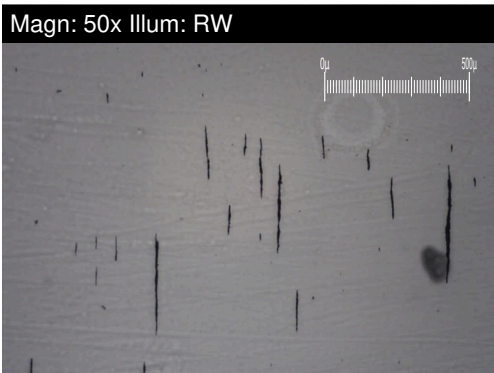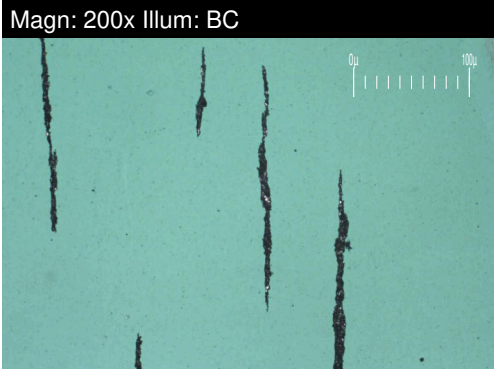


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		1.3	20.9	7.5
Small Particles		DR-Ferr*		0.9	5.6	6.9
Total Particles		DR-Ferr*	>---	2.2	26.5	14.4
Large Particles Percentage	%	DR-Ferr*		18.2	57.7	4.2
Severity Index		DR-Ferr*		1	320	4

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2	3	3
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				1
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

WEAR

The ferrography results are normal indicating no abnormal wear in the system.

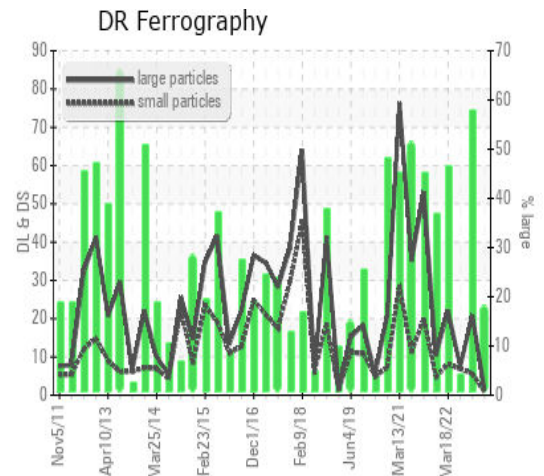

This page left intentionally blank