




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

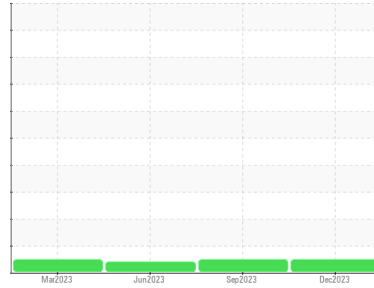

Area  
**RONI**  
 Machine Id  
**457**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0872958</b>	LH0275076	LH0261564
Sample Date	Client Info			<b>08 Dec 2023</b>	25 Sep 2023	07 Jun 2023
Machine Age	hrs	Client Info		<b>0</b>	2697	2166
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1		<b>&lt;1.0</b>	<1.0	0.9
Water	WC Method	>0.21		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	<b>9</b>	11	11
Chromium	ppm	ASTM D5185(m)	>11	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>31	<b>1</b>	1	2
Lead	ppm	ASTM D5185(m)	>26	<b>2</b>	2	1
Copper	ppm	ASTM D5185(m)	>26	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>1</b>	2	1
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>61</b>	60	61
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>982</b>	998	1002
Calcium	ppm	ASTM D5185(m)		<b>1045</b>	1074	1109
Phosphorus	ppm	ASTM D5185(m)		<b>989</b>	1002	1117
Zinc	ppm	ASTM D5185(m)		<b>1215</b>	1224	1225
Sulfur	ppm	ASTM D5185(m)		<b>2576</b>	2552	2733
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	<b>2</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.4</b>	6.6	6.8
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.1</b>	18.0	18.5



# OIL ANALYSIS REPORT








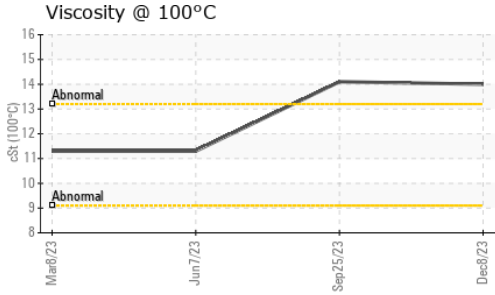


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.4</b>	13.9	14.8

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.21	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	<b>14.0</b>	14.1	▲ 11.3

## GRAPHS

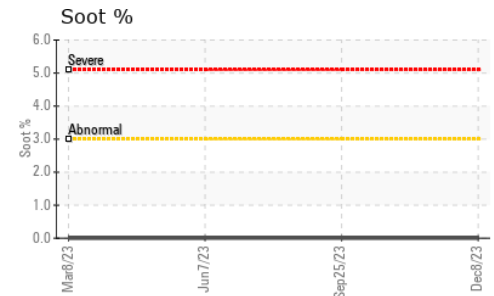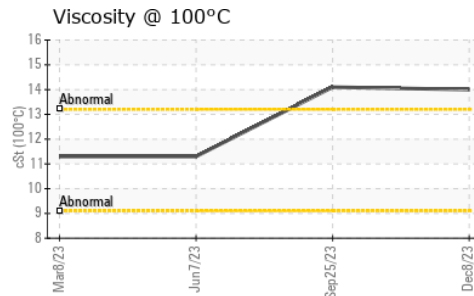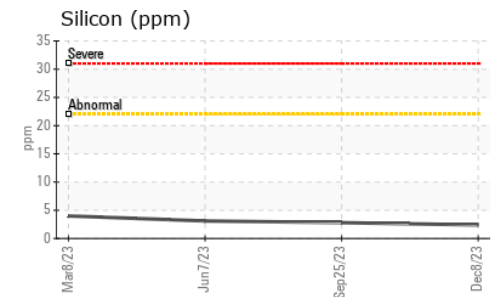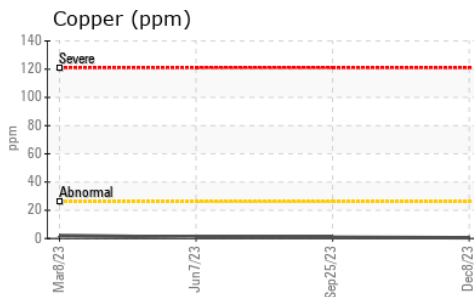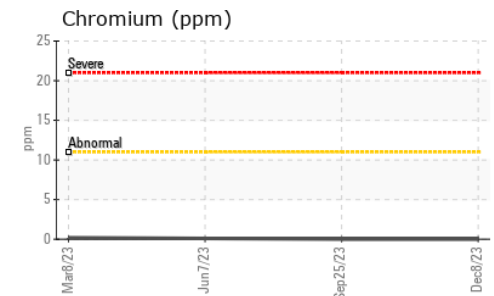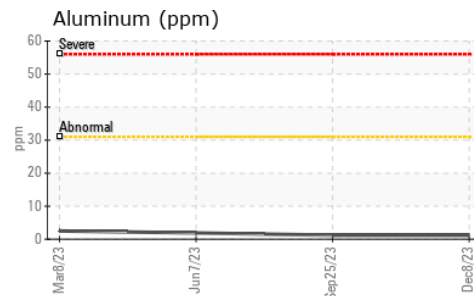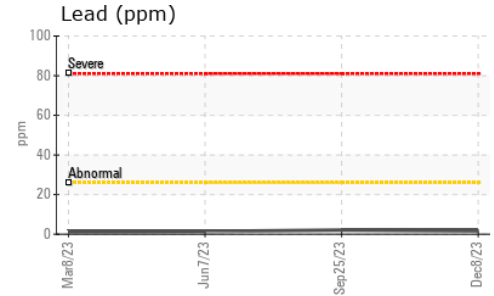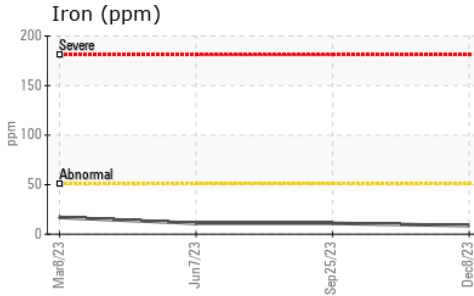

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RONI/IRON SHORE EXCAVATING LTD.**  
**Sample No.** : WC0872958 **Received** : 14 Dec 2023 **100 MACINTOSH BLVD**  
**Lab Number** : 02603066 **Diagnosed** : 14 Dec 2023 **VAUGHAN, ON**  
**Unique Number** : 5696151 **Diagnostician** : Kevin Marson **CA L4K 4P3**  
**Test Package** : MOBCE **Contact: Service Team**  
**service.team@roni.ca**

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.