




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

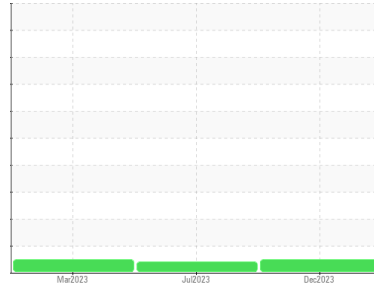

Area
ORIN CONTRACTORS
 Machine Id
160
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0872990 | LH0270775 | LH0218884 |
| Sample Date | Client Info | | 06 Dec 2023 | 18 Jul 2023 | 06 Mar 2023 |
| Machine Age | hrs | Client Info | 0 | 1050 | 1500 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Changed | Changed | Not Changed |
| Sample Status | | | NORMAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >6.0 | <1.0 | 1.5 | <1.0 |
| Water | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >100 | 17 | 11 | 15 |
| Chromium | ppm | ASTM D5185(m) | >10 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >10 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185(m) | >2 | 0 | 1 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >10 | 5 | 4 | 6 |
| Lead | ppm | ASTM D5185(m) | >20 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >15 | 4 | 3 | 7 |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 2 | 3 | 5 | 12 |
| Barium | ppm | ASTM D5185(m) | 0 | <1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 50 | 58 | 56 | 59 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 950 | 944 | 935 | 900 |
| Calcium | ppm | ASTM D5185(m) | 1050 | 1022 | 1026 | 1242 |
| Phosphorus | ppm | ASTM D5185(m) | 995 | 969 | 1046 | 1099 |
| Zinc | ppm | ASTM D5185(m) | 1180 | 1179 | 1157 | 1205 |
| Sulfur | ppm | ASTM D5185(m) | 2600 | 2525 | 2550 | 2728 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|----------|----------|----|
| Silicon | ppm | ASTM D5185(m) | >20 | 4 | 6 | 5 |
| Sodium | ppm | ASTM D5185(m) | | 1 | 1 | 1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|---------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >3 | 0.2 | 0.1 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 6.9 | 6.4 | 7.9 |
| Sulfation | Abs.1mm | ASTM D7415* | >30 | 18.0 | 18.3 | 21.3 |



OIL ANALYSIS REPORT

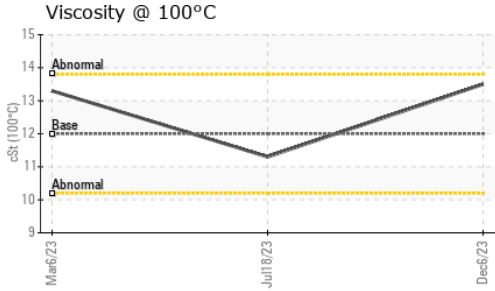

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 14.2 | 14.1 | 15.6 |


VISUAL

| | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|------------|----------|-----|
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

FLUID PROPERTIES

| | method | limit/base | current | history1 | history2 | |
|--------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 12.00 | 13.5 | ▲ 11.3 | 13.3 |

GRAPHS

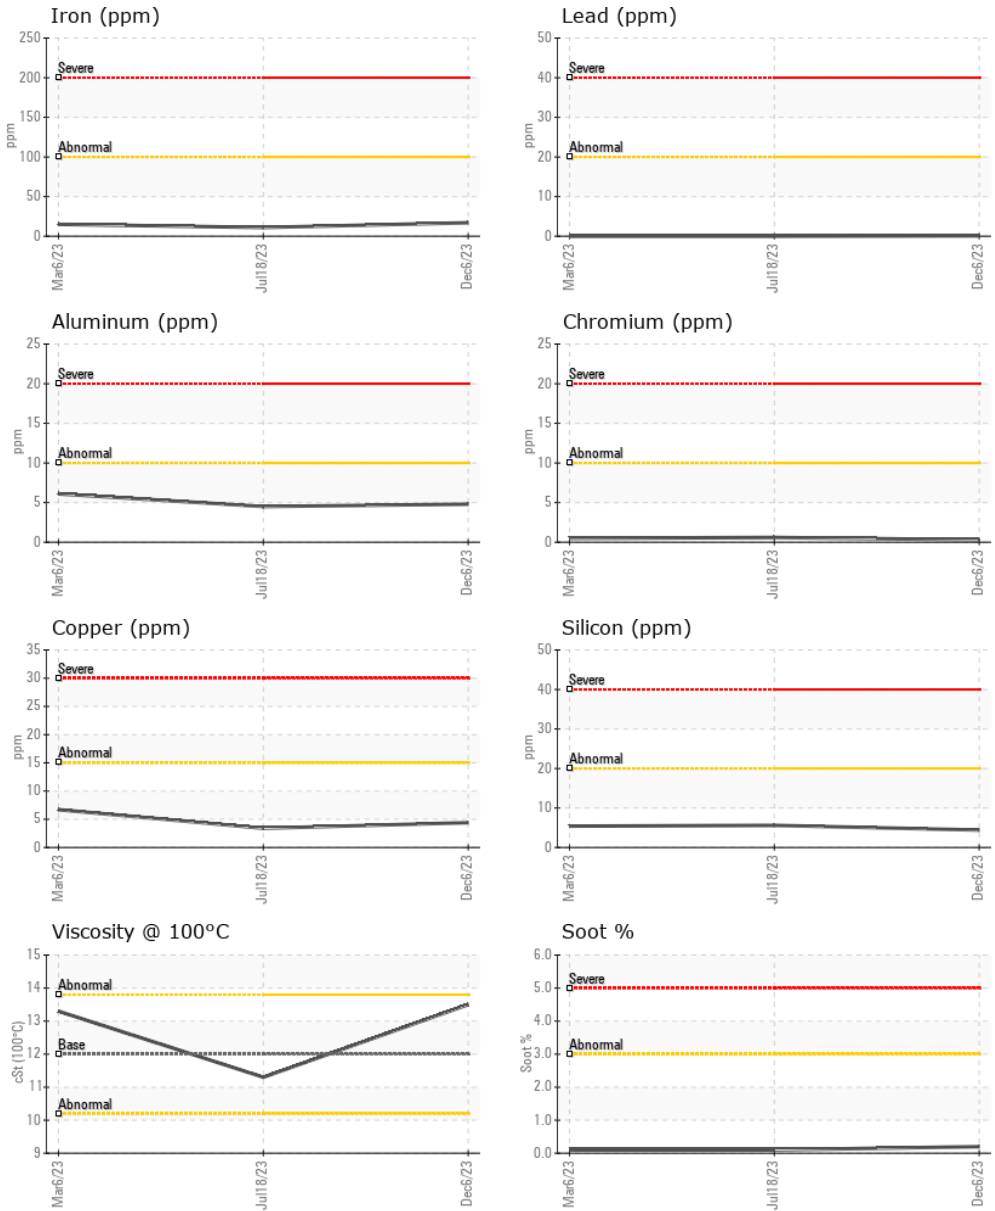

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RONI/IRON SHORE EXCAVATING LTD.**
Sample No. : WC0872990 **Received** : 14 Dec 2023 **100 MACINTOSH BLVD**
Lab Number : 02603067 **Diagnosed** : 14 Dec 2023 **VAUGHAN, ON**
Unique Number : 5696152 **Diagnostician** : Kevin Marson **CA L4K 4P3**
Test Package : MOBCE **Contact: Service Team**
service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.