




OIL ANALYSIS REPORT

Sample Rating Trend

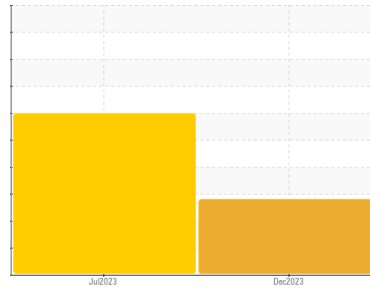

DIRT



Machine Id
HONDA 2HKRS6H96PH200059
 Component
Gasoline Engine
 Fluid
PETRO CANADA SUPREME SYNTHETIC 0W20 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of fuel present in the oil. There is a moderate concentration of dirt present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0708991	WC0708972	---
Sample Date	Client Info	12 Dec 2023	23 Jul 2023	---
Machine Age	kms Client Info	0	7985	---
Oil Age	kms Client Info	4000	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	SEVERE	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	0.0	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185(m) >150	10	25	---
Chromium ppm	ASTM D5185(m) >20	0	<1	---
Nickel ppm	ASTM D5185(m) >5	0	0	---
Titanium ppm	ASTM D5185(m)	0	0	---
Silver ppm	ASTM D5185(m) >2	0	0	---
Aluminum ppm	ASTM D5185(m) >40	6	11	---
Lead ppm	ASTM D5185(m) >50	<1	1	---
Copper ppm	ASTM D5185(m) >155	10	38	---
Tin ppm	ASTM D5185(m) >10	0	<1	---
Antimony ppm	ASTM D5185(m)	0	0	---
Vanadium ppm	ASTM D5185(m)	0	<1	---
Beryllium ppm	ASTM D5185(m)	0	0	---
Cadmium ppm	ASTM D5185(m)	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185(m) 230	140	171	---
Barium ppm	ASTM D5185(m) 0	<1	3	---
Molybdenum ppm	ASTM D5185(m) 74	178	616	---
Manganese ppm	ASTM D5185(m) 0	1	5	---
Magnesium ppm	ASTM D5185(m) 556	436	11	---
Calcium ppm	ASTM D5185(m) 1293	1253	1742	---
Phosphorus ppm	ASTM D5185(m) 833	655	672	---
Zinc ppm	ASTM D5185(m) 808	755	720	---
Sulfur ppm	ASTM D5185(m) 2676	2299	2114	---
Lithium ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS





method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185(m) >30	▲ 55	● 217	---
Sodium ppm	ASTM D5185(m) >400	2	6	---
Potassium ppm	ASTM D5185(m) >20	5	10	---
Fuel %	ASTM D7593* >4.0	▲ 6.7	▲ 2.6	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	ASTM D7844* %	0	0	---
Nitration	Abs/cm ASTM D7624* >20	8.3	8.9	---
Sulfation	Abs./1mm ASTM D7415* >30	18.2	25.0	---



OIL ANALYSIS REPORT





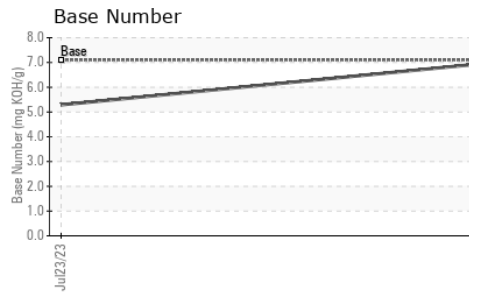
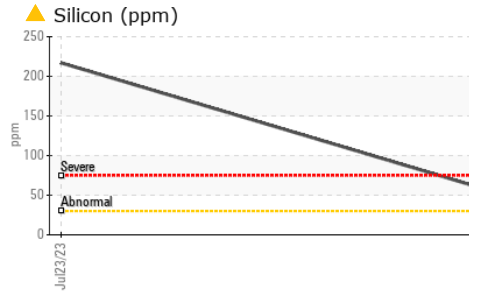
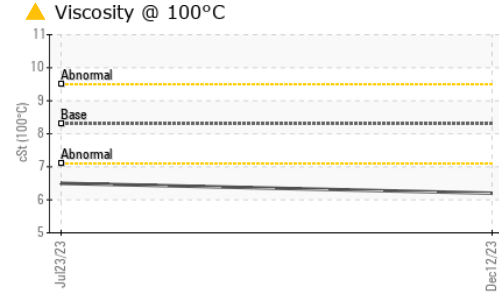
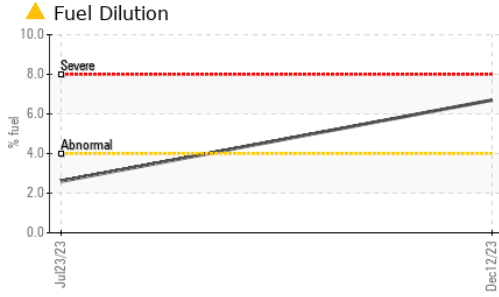


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	12.1	19.0	---
Base Number (BN)	mg KOH/g	ASTM D2896*	7.1	6.99	5.29	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	8.3	▲ 6.2	▲ 6.5	---

GRAPHS

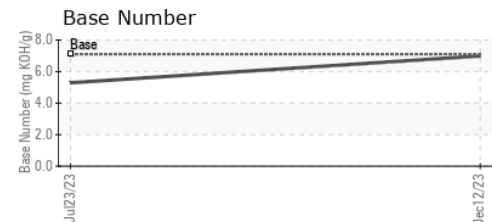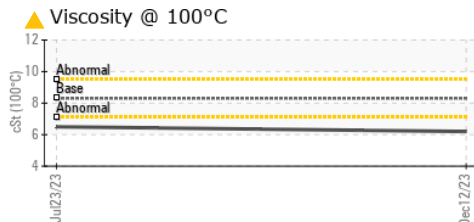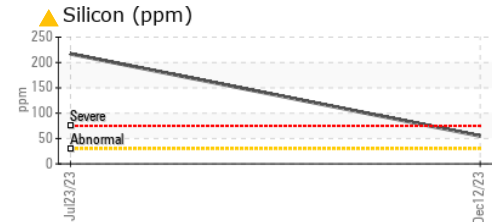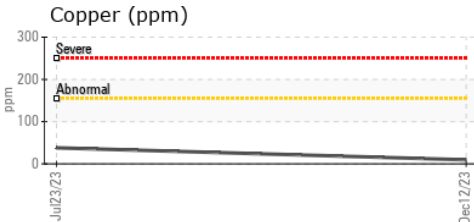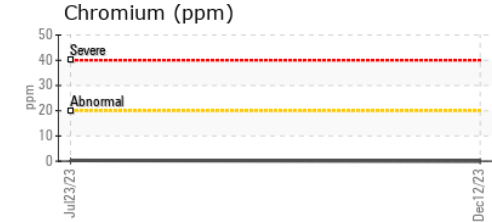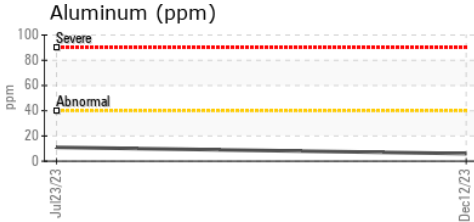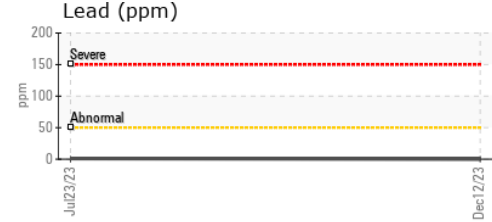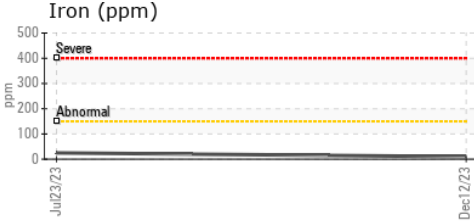

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0708991 **Received** : 14 Dec 2023
Lab Number : 02603175 **Diagnosed** : 19 Dec 2023
Unique Number : 5696260 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

HONDA CANADA INC.
 180 HONDA BLVD
 MARKHAM, ON
 CA L6C 0H9
 Contact: Marc St Arnaud
 marc_starnaud@ch.honda.com
 T:
 F: (416)287-4500

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.