


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

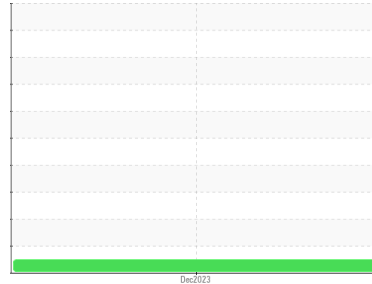

Area
[6100240552]

Machine Id
6610

Component
Transmission (Auto)

Fluid
CASTROL TRANSYND (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Le test de glycol est négatif. Il n'y a aucun indice de contamination dans le fluide.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de le fluide permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WA0020770	---	---
Sample Date	Client Info			13 Dec 2023	---	---
Machine Age	hrs	Client Info		517914	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	---	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>100	0	---	---
Iron	ppm	ASTM D5185(m)	>300	69	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>5	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>70	15	---	---
Lead	ppm	ASTM D5185(m)	>85	6	---	---
Copper	ppm	ASTM D5185(m)	>90	72	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Antimony	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	150	93	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	0	5	---	---
Calcium	ppm	ASTM D5185(m)	40	41	---	---
Phosphorus	ppm	ASTM D5185(m)	320	237	---	---
Zinc	ppm	ASTM D5185(m)	5	20	---	---
Sulfur	ppm	ASTM D5185(m)	1050	1481	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	8	---	---
Sodium	ppm	ASTM D5185(m)		6	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Glycol	%	ASTM D7922*		0.0	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	0.97	---	---

OIL ANALYSIS REPORT

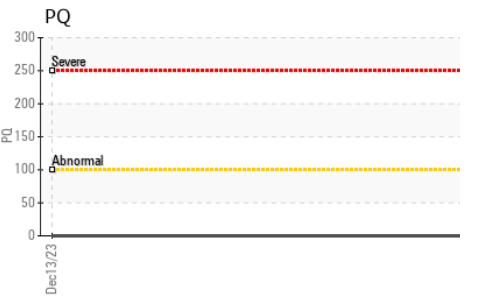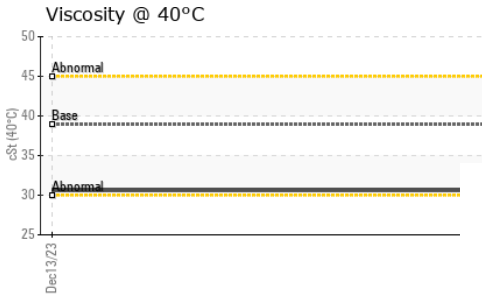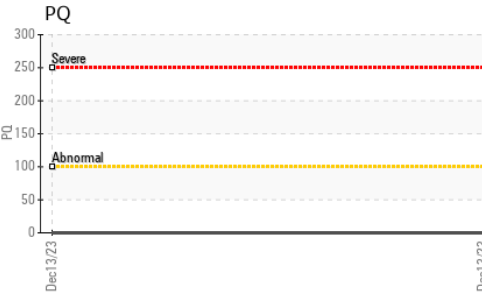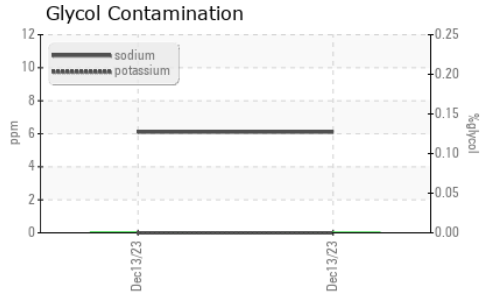









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	30.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

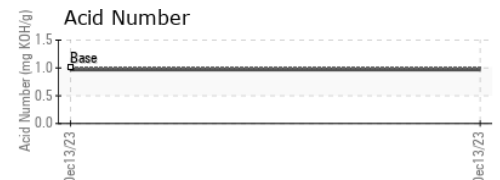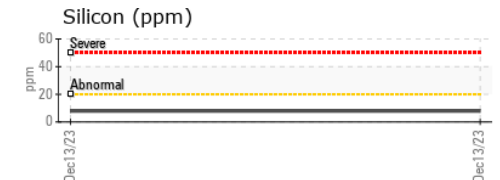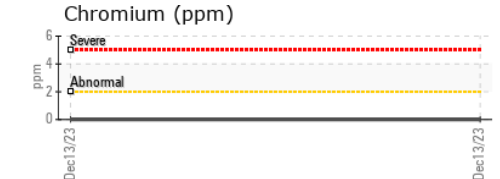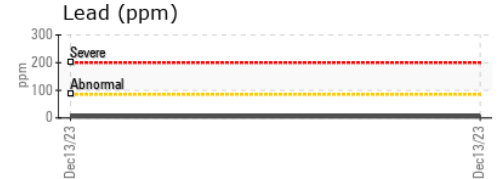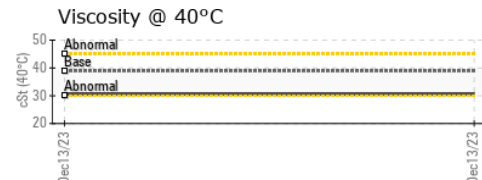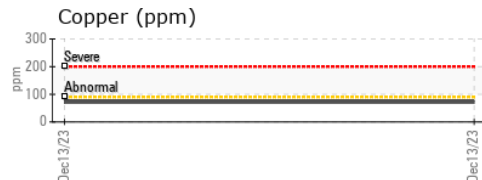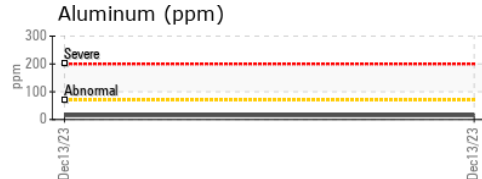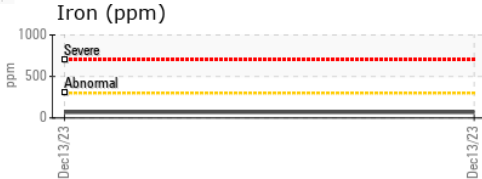

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0020770 **Received** : 14 Dec 2023
Lab Number : 02603241 **Diagnosed** : 18 Dec 2023
Unique Number : 5696326 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: GLYCOL, PQ)

Wajax Power Systems
 10955 Cote de Liesse
 Dorval, QC
 CA H9P 1A7
 Contact: Michel Corbeil
 mcorbeil@wajax.com
 T: (514)636-0680
 F: (514)636-8590

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.