




# OIL ANALYSIS REPORT

Sample Rating Trend

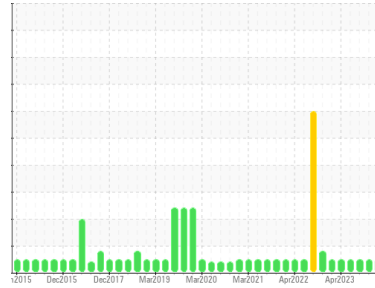

**NORMAL**



Area

**[22048385]**

Machine Id

**129-174 Feed Screw circulating oil (S/N R260532)**

Component

**Circulating Bearing**

Fluid

**ESSO SPARTAN EP 150 (3 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0870411</b>	WC0813438	WC0840176
Sample Date	Client Info		<b>07 Dec 2023</b>	05 Oct 2023	03 Aug 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>9</b>	0	0
Iron	ppm	ASTM D5185(m) >20	<b>28</b>	27	15
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 4.0	<b>26</b>	20	25
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185(m) 0.8	<b>1</b>	4	5
Phosphorus	ppm	ASTM D5185(m) 250	<b>321</b>	323	361
Zinc	ppm	ASTM D5185(m) 1.0	<b>1</b>	2	3
Sulfur	ppm	ASTM D5185(m) 5133	<b>11062</b>	14338	14248
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>2</b>	2	3
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.75	<b>0.58</b>	0.73	0.63




# OIL ANALYSIS REPORT

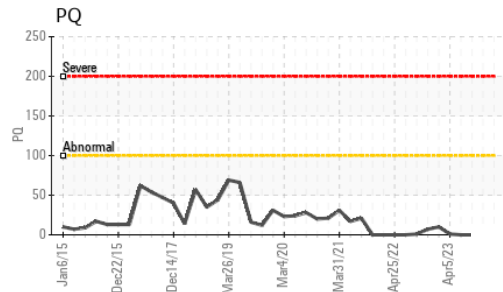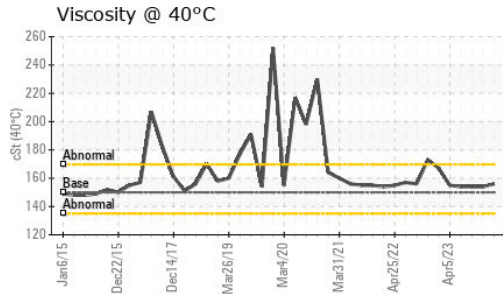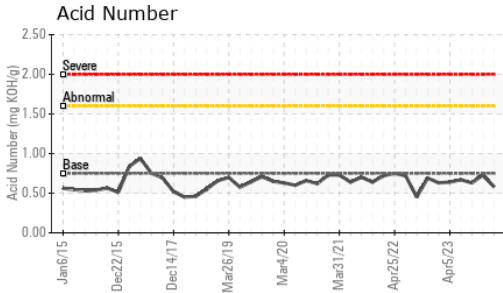






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	150	156	154

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

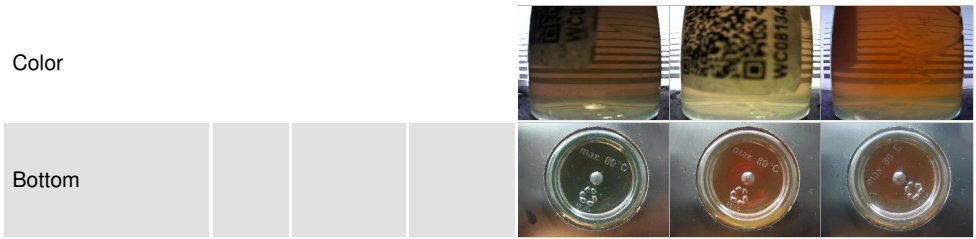

## GRAPHS

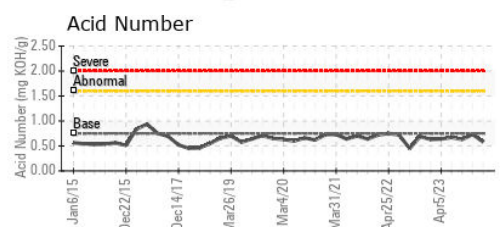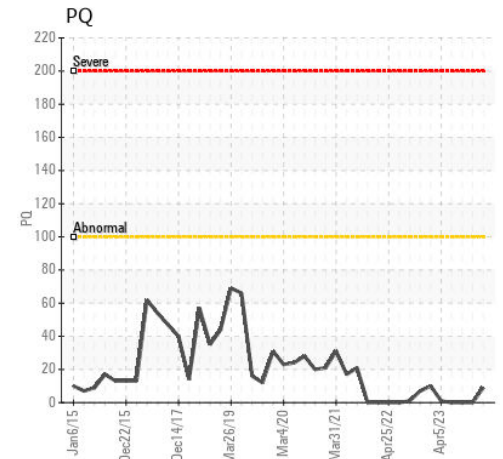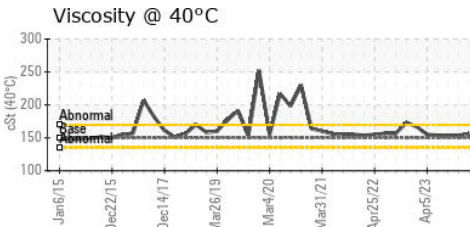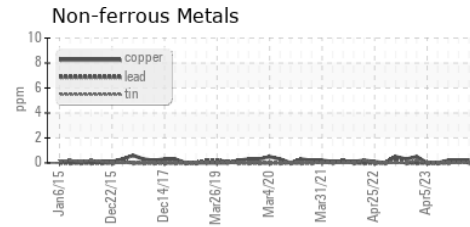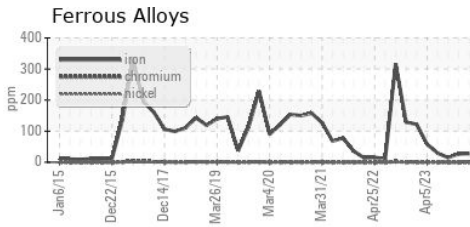

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0870411  
 Lab Number : 02603338  
 Unique Number : 5696423  
 Test Package : IND 2

Received : 14 Dec 2023  
 Diagnosed : 18 Dec 2023  
 Diagnostician : Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**ARAUCO - St. Stephen**  
 151 Church Street  
 St. Stephen, NB  
 CA E3L 3A6  
 Contact: Jim Sears  
 Jim.Sears@arauco.com  
 T: (506)465-2858  
 F: (506)465-2831