


PROBLEM SUMMARY

Area Laurel Steel Machine Id 126-2B-M-COILOPENER PUSHPOINT Component

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

COMPONENT CONDITION SUMMARY

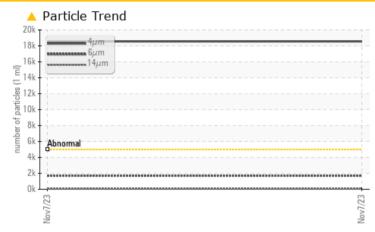

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	
Particles >4µm	ASTM D7647 >	5000 A 18563	
Particles >6µm	ASTM D7647 >	1300 🔺 1712	
Oil Cleanliness	ISO 4406 (c) >	19/17/14 🔺 21/18/13	


Customer Id: FORHAM Sample No.: WC0835330 Lab Number: 02603468 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Gloria Gonzalez +1 (289)291-4643 x4643 gloria.gonzalez@wearcheck.com

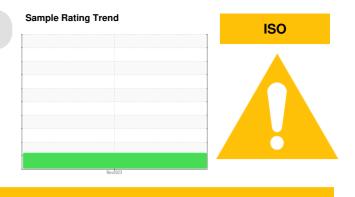

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Change Filter			?	We recommend you service the filters on this component.			
Resample			?	We recommend an early resample to monitor this condition.			
Alert			?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.			
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.			

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Area Laurel Steel Machine Id 126-2B-M-COILOPENER PUSHPOINT

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

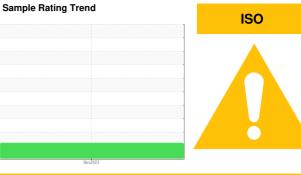

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0835330		
Sample Date		Client Info		07 Nov 2023		
	hrs	Client Info		0		
U	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				ABNORMAL		
		method	limit/base			
Water		WC Method		current	history1	history2
WEAR METALS		method	limit/base	current	history1	history2
					motory	
	ppm	ASTM D5185(m)	>20	2		
	ppm	ASTM D5185(m)	>20	0		
	ppm	ASTM D5185(m)	>20	<1		
	ppm	ASTM D5185(m)		0		
	ppm	ASTM D5185(m)	. 20	<1		
	ppm	ASTM D5185(m)	>20	0		
-	ppm	ASTM D5185(m)	>20 >20	<1 1		
	ppm	ASTM D5185(m)				
	ppm	ASTM D5185(m)	>20	0		
	ppm	ASTM D5185(m)		0		
	ppm	ASTM D5185(m) ASTM D5185(m)		0		
	ppm			0		
	ppm	ASTM D5185(m)	llas 11/le e e e			
ADDITIVES		method	limit/base	current	history1	history2
	ppm	ASTM D5185(m)	5	<1		
	ppm	ASTM D5185(m)	5	<1		
Vlolvhdonum						
	ppm	ASTM D5185(m)	5	0		
Vanganese	ppm	ASTM D5185(m)		0		
Manganese Magnesium	ppm ppm	ASTM D5185(m) ASTM D5185(m)	25	0 <1		
Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200	0 <1 49		
Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300	0 <1 49 336		
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370	0 <1 49 336 402		
Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300	0 <1 49 336 402 800	 	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500	0 <1 49 336 402 800 <1	 	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base	0 <1 49 336 402 800 <1	 	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500	0 <1 49 336 402 800 <1 current 0	 	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15	0 <1 49 336 402 800 <1 current 0 <1	 history1	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base	0 <1 49 336 402 800 <1 current 0	 history1	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15	0 <1 49 336 402 800 <1 current 0 <1 0	 history1	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15 >20	0 <1 49 336 402 800 <1 current 0 <1 0	 history1 	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 ilimit/base >15 >20 ilimit/base	0 <1 49 336 402 800 <1 current 0 <1 0 <1 0	 history1 history1	 history2 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 Iimit/base >15 >20 Iimit/base >5000	0 <1 49 336 402 800 <1 current 0 <1 0 <1 0 current 0 18563 ▲ 18563 ▲ 1712 58	 history1 history1 	 history2 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	25 200 300 2500 2500 Imit/base >15 >20 Imit/base >5000 >1300 >160	0 <1 49 336 402 800 <1 current 0 <1 0 <1 0 current 18563 ▲ 18563	 history1 history1 history1	 history2 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	25 200 300 2500 2500 Imit/base >15 >20 Imit/base >5000 >1300 >160	0 <1 49 336 402 800 <1 0 <1 0 <1 0 <1 0 € 11 18563 1712 58 11 1	 history1 history1	 history2 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	25 200 300 370 2500 Imit/base >15 >20 Imit/base >5000 >1300 >160 >40 >10	0 <1 49 336 402 800 <1 0 <1 0 <1 0 <1 0 0 <1 8 0 ×1 0 ×1 0 ×1 0 ×1 0 ×1 0 ×1 58 ×1 11	 history1 history1	 history2 history2



🔺 Particle Trend

20

/1 ml) 15

mhar 5

r of particles

0

20

(1 ml)

mher

of particles (

0

1.00 0.8 Ê0.60

² በ 40 P 0.20

0.00

52

50

48

() 46 Bas

ري 44


47

40

38

C/L/VON

OIL ANALYSIS REPORT

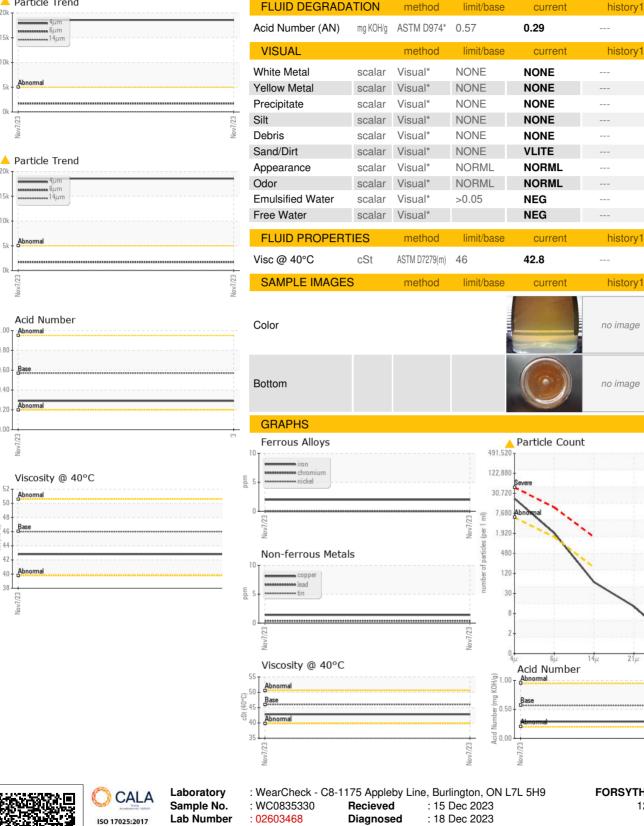

FORSYTHE LUBRICATION 120 CHATHAM ST. HAMILTON, ON CA L8P 2B5 Contact: HEIDI LEINGARTNER

384

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-268-2131.

: 5696553

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

: Wes Davis

Diagnostician

T: (905)525-7192 F: (905)525-7024

Accredited

Laboratory

Unique Number

Submitted By: WIlliam Ridley

Page 4 of 4

history2

history2

history2

history2

no image

no image

20 8

18 18

14