

OIL ANALYSIS REPORT

CROWN METAL - C02400

Component **Hydraulic System**

REC HYD 220 ZNT (--- GAL)

A2312064

Sample Rating Trend



Recommendation

This is a baseline read-out on the submitted sample.

Wear

Aluminum ppm levels are noted.

Contamination

{not applicable}

Fluid Condition

{not applicable}

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|--------|-------------|------------|--------------|----------|----------|
| Batch # | | Client Info | | 2023 12 0030 | | |
| Department | | Client Info | | Production | | |
| Sample From | | Client Info | | Machine | | |
| Production Stage | | Client Info | | Final | | |
| Sent to WC | | Client Info | | 12/13/2023 | | |
| Sample Number | | Client Info | | E30000927 | | |
| Sample Date | | Client Info | | 13 Dec 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |


| WEAR METALS | | method | | | history2 |
|-------------|-----|---------------|-----|----|----------|
| Iron | ppm | ASTM D5185(m) | >20 | 4 | |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | |
| Nickel | ppm | ASTM D5185(m) | >20 | <1 | |
| Titanium | ppm | ASTM D5185(m) | | 0 | |
| Silver | ppm | ASTM D5185(m) | | <1 | |
| Aluminum | ppm | ASTM D5185(m) | >20 | 21 | |
| Lead | ppm | ASTM D5185(m) | >20 | 2 | |
| Copper | ppm | ASTM D5185(m) | >20 | 8 | |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | |
| Antimony | ppm | ASTM D5185(m) | | 0 | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | |
| Cadmium | ppm | ASTM D5185(m) | | 0 | |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|---------|----------|----------|
| Boron | ppm | ASTM D5185(m) | | <1 | | |
| Barium | ppm | ASTM D5185(m) | | <1 | | |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | | |
| Manganese | ppm | ASTM D5185(m) | | 0 | | |
| Magnesium | ppm | ASTM D5185(m) | | 95 | | |
| Calcium | ppm | ASTM D5185(m) | | 87 | | |
| Phosphorus | ppm | ASTM D5185(m) | | 391 | | |
| Zinc | ppm | ASTM D5185(m) | | 427 | | |
| Sulfur | ppm | ASTM D5185(m) | | 1137 | | |
| Lithium | ppm | ASTM D5185(m) | | <1 | | |
| | | | | | | |

| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|---------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >15 | 7 | | |
| Sodium | ppm | ASTM D5185(m) | | 4 | | |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | | |
| Water | % | ASTM D6304* | >0.05 | 0.003 | | |
| ppm Water | ppm | ASTM D6304* | >500 | 27 | | |



OIL ANALYSIS REPORT

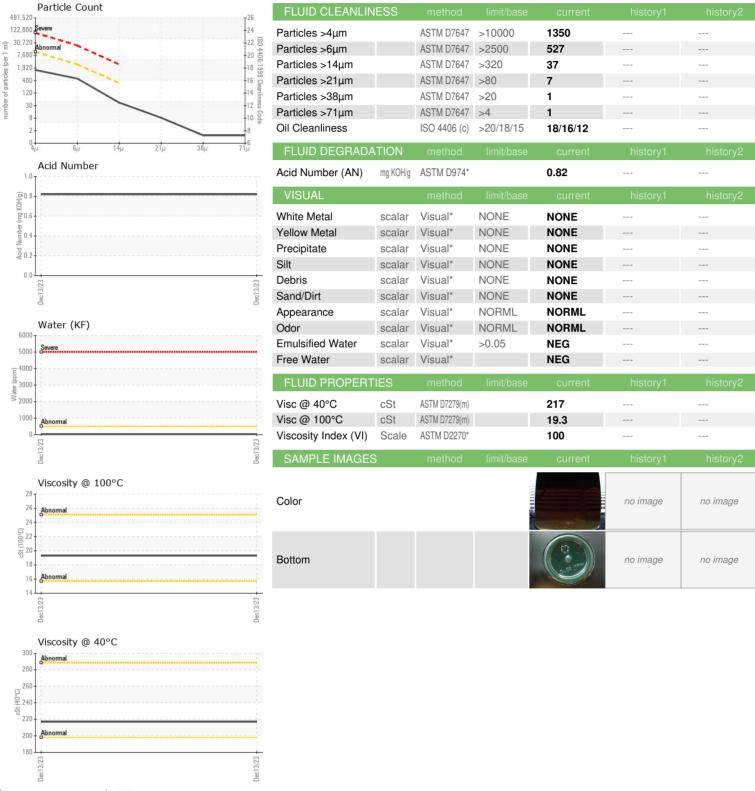



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: E30000927 : 02603492

Recieved : 5696577

: 15 Dec 2023 Diagnosed : 19 Dec 2023 Diagnostician : Tatiana Sorkina

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON **CA K9A 5H5** Contact: Fred Kosseim

fkosseim@e360s.ca T: (905)372-2251 F: (905)372-1658