




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[100014727]
 Machine Id
EPIROC ST14 SCP205
 Component
Rear Left Planetary
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

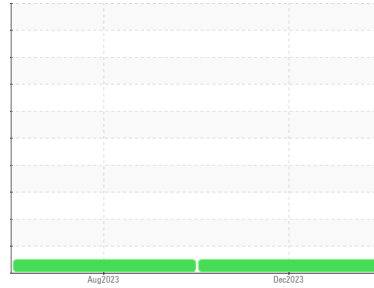

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | WC0885236 | WC0835178 | --- |
| Sample Date | Client Info | | | 12 Dec 2023 | 07 Aug 2023 | --- |
| Machine Age | hrs | Client Info | | 2101 | 903 | --- |
| Oil Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | Client Info | | | Not Chngd | N/A | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | NEG | --- |


| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >500 | 51 | 88 | --- |
| Chromium | ppm | ASTM D5185(m) | >10 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185(m) | >10 | <1 | <1 | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | 1 | --- |
| Silver | ppm | ASTM D5185(m) | | <1 | <1 | --- |
| Aluminum | ppm | ASTM D5185(m) | >25 | <1 | 4 | --- |
| Lead | ppm | ASTM D5185(m) | >25 | <1 | 0 | --- |
| Copper | ppm | ASTM D5185(m) | >75 | 3 | 8 | --- |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | 0 | --- |
| Antimony | ppm | ASTM D5185(m) | >5 | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | --- |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 400 | 177 | 232 | --- |
| Barium | ppm | ASTM D5185(m) | 200 | <1 | 0 | --- |
| Molybdenum | ppm | ASTM D5185(m) | 12 | 0 | 0 | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | 1 | --- |
| Magnesium | ppm | ASTM D5185(m) | 12 | 4 | 2 | --- |
| Calcium | ppm | ASTM D5185(m) | 150 | 12 | 6 | --- |
| Phosphorus | ppm | ASTM D5185(m) | 1650 | 1005 | 969 | --- |
| Zinc | ppm | ASTM D5185(m) | 125 | 9 | 7 | --- |
| Sulfur | ppm | ASTM D5185(m) | 22500 | 21027 | 18122 | --- |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >75 | 5 | 13 | --- |
| Sodium | ppm | ASTM D5185(m) | >170 | <1 | 1 | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | 1 | --- |



OIL ANALYSIS REPORT

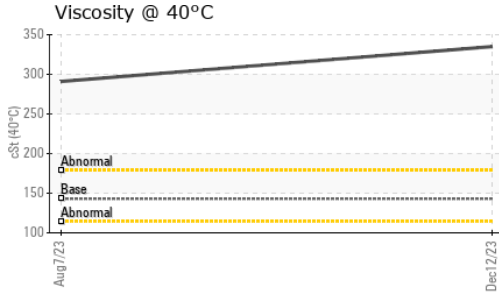








| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- |
| Silt | scalar | Visual* | NONE | NONE | --- |
| Debris | scalar | Visual* | NONE | NONE | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- |
| Odor | scalar | Visual* | NORML | NORML | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- |
| Free Water | scalar | Visual* | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|---------------|---------|------------|----------|-----|
| Visc @ 40°C | cSt | ASTM D7279(m) | 143 | 335 | 291 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|--|--|----------|
| Color | | | | | | no image |
| Bottom | | | | | | no image |

GRAPHS

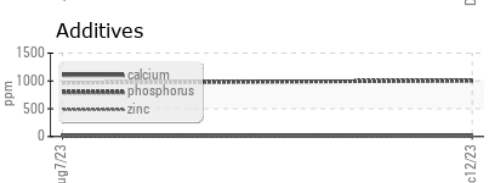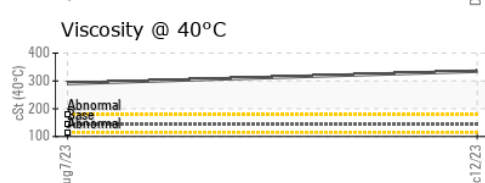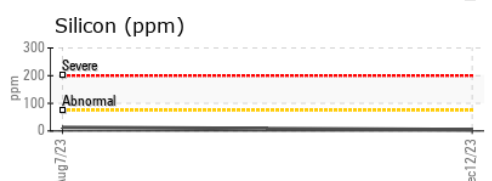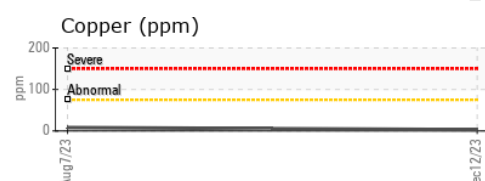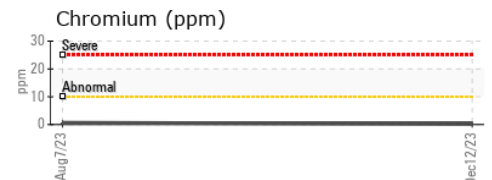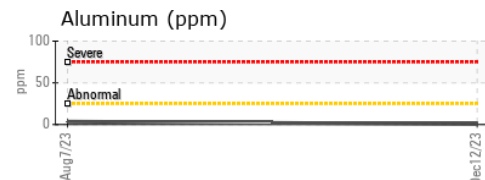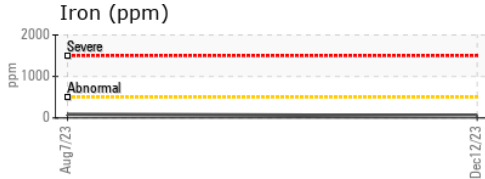

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0885236 **Received** : 15 Dec 2023
Lab Number : 02603575 **Diagnosed** : 15 Dec 2023
Unique Number : 5696660 **Diagnostician** : Wes Davis
Test Package : MOB 1

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Mitch Lamontagne
 AEM_KL_macassaoilsampleresults@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.