

OIL ANALYSIS REPORT

Sample Rating Trend



Machine 170832 (S/N GH-9141B) Component

Hoist Eluic NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Dec2023		
SAMPLE INFOR	MATI <u>ON</u>	method	limit/base	current	history1	history2
Sample Number		Client Info		PP		
Sample Date		Client Info		14 Dec 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1115	Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	DN	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185(m)	>171	3		
Chromium	ppm	ASTM D5185(m)	>171	0		
Nickel	ppm	ASTM D5185(m) ASTM D5185(m)	>4 >4	-		
Titanium	ppm	ASTM D5185(m) ASTM D5185(m)	>4	<1 0		
Silver	ppm	ASTM D5185(m) ASTM D5185(m)		-		
	ppm		. 7	<1		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)	>87	<1 7		
Copper	ppm	ASTM D5185(m)	>95	7		
Tin	ppm	ASTM D5185(m)	>5	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		5		
Calcium	ppm	ASTM D5185(m)		66		
Phosphorus	ppm	ASTM D5185(m)		234		
Zinc	ppm	ASTM D5185(m)		279		
Sulfur	ppm	ASTM D5185(m)		2666		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>32	3		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1697		
Particles >6µm		ASTM D7647	>1300	294		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	2		
			10			
Particles >38µm		ASTM D7647	>10	1		
		ASTM D7647 ASTM D7647		1 0		
Particles >38µm Particles >71µm Oil Cleanliness						



OIL ANALYSIS REPORT

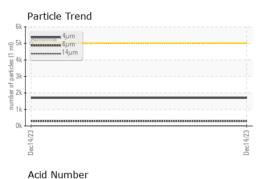

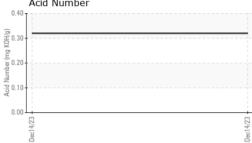

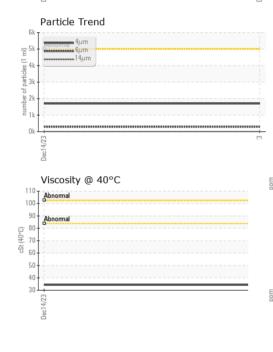

FLUID DEGRADA	TION_	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.32		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris Sand/Dirt	scalar scalar	Visual* Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		34.3		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				GH-91418	no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count		т26
iron			122,880			-24
5 nickel			30,720	Severe		-22
0			7.090	Abnormal		
Jec14/23			Dec14/23 (per 1 m	[••• • •		+18
≝ Non-ferrous Metal	c		a) (sapping 480	1		16
)T			Dec14/2000 Dec14/23 1200 1200 1200 1200 1200 1200 1200 12		•	-20 -18 -16 -14
copper management lead						-12
						10
53					1	
Dec14/23			ec14			
Viscosity @ 40°C				6	14μ 21μ	38µ 71µ
Abnormal Abnormal			学0.40 Y 0.30	1		
,			(^b)(HO) 40 (^b)			
				1		
01+ 22			00.0 4cid	t/23 +		1/23
Dec14/23			Dec14/23	Dec14/23		Dec14/23
: 02603609	75 Apple Recieved Diagnos Diagnost	l :15 l ed :19 l	lington, ON L Dec 2023 Dec 2023 rin Marson		000,, 100 NEW 0	OPMENT CO. LTE GOWER STREET ST.JOHNS, NL CA A1C 6K3

cSt (40°C)

Laboratory

Sample No. Lab Number

Unique Number

Contact: Michelle Jefford michelle.a.jefford@exxonmobil.com T: (709)778-7205 F: (709)753-2728



CALA

ISO 17025:2017