




PROBLEM SUMMARY

Sample Rating Trend

ISO

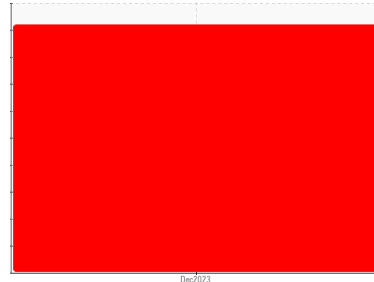


Machine Id
POWER PACK #1 LINE #1 (WOODGRAINER)

Component
Hydraulic System


Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

Particle Trend

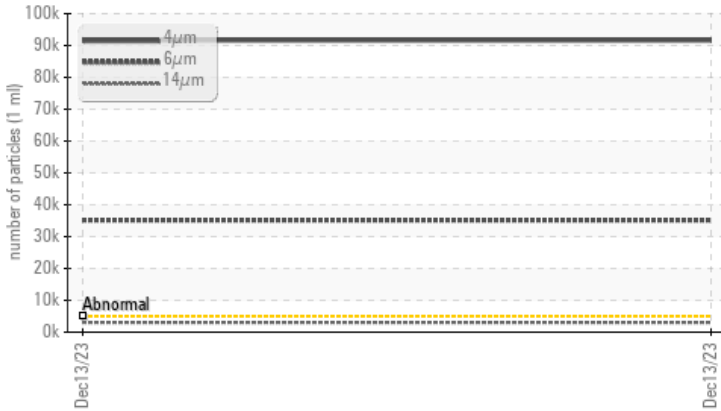

Viscosity @ 40°C

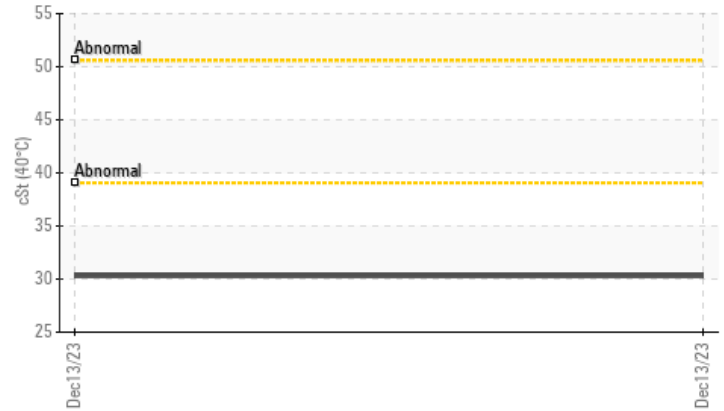


RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Particles >4µm	ASTM D7647	>5000	🔴 91643	---	---	
Particles >6µm	ASTM D7647	>1300	🔴 35152	---	---	
Particles >14µm	ASTM D7647	>160	🔴 3027	---	---	
Particles >21µm	ASTM D7647	>40	🔴 670	---	---	
Particles >38µm	ASTM D7647	>10	🟡 33	---	---	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	🔴 24/22/19	---	---	
White Metal	scalar	Visual*	🟡 VLITE	---	---	

PrtFilter



Customer Id: CLESPR
Sample No.: WC0782181
Lab Number: 02603791
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Check For Visual Metal	---	---	?	We advise that you check for visible metal particles in the oil.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend


ISO



Machine Id
POWER PACK #1 LINE #1 (WOODGRAINER)

Component
Hydraulic System

Fluid
NOT GIVEN (--- GAL)

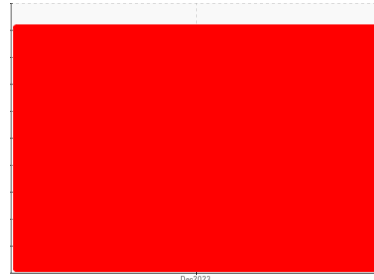

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Light concentration of visible metal present.

Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 10W range, advise investigate. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Particle Filter (Magn: 100 x)



SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0782181	---	---
Sample Date	Client Info			13 Dec 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				SEVERE	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	1	---	---
Copper	ppm	ASTM D5185(m)	>20	19	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		6	---	---
Calcium	ppm	ASTM D5185(m)		48	---	---
Phosphorus	ppm	ASTM D5185(m)		278	---	---
Zinc	ppm	ASTM D5185(m)		306	---	---
Sulfur	ppm	ASTM D5185(m)		1843	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	1	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	91643	---	---	
Particles >6µm	ASTM D7647	>1300	35152	---	---	
Particles >14µm	ASTM D7647	>160	3027	---	---	
Particles >21µm	ASTM D7647	>40	670	---	---	
Particles >38µm	ASTM D7647	>10	33	---	---	
Particles >71µm	ASTM D7647	>3	1	---	---	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	24/22/19	---	---	



OIL ANALYSIS REPORT

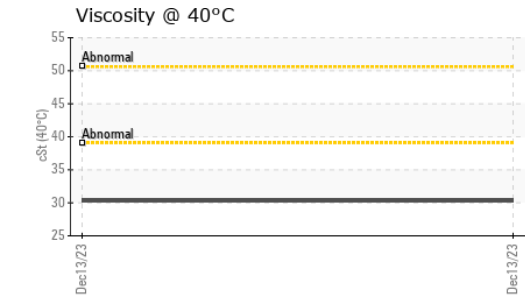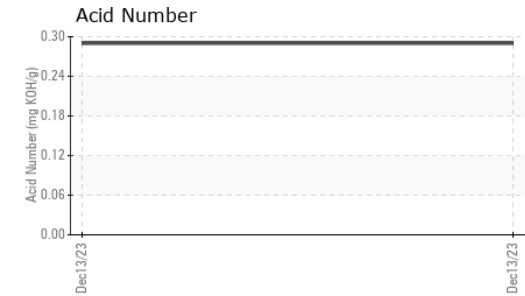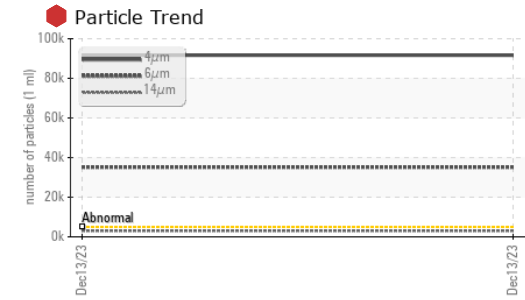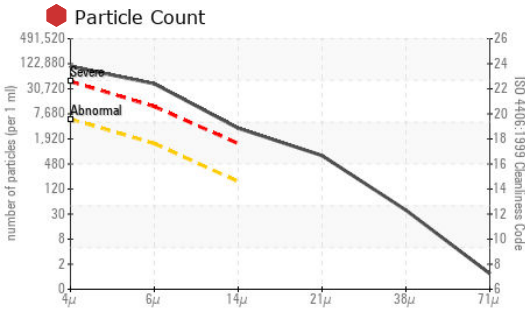

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.29	---	---


VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	▲ VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	30.3	---	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0782181 **Received** : 18 Dec 2023
Lab Number : **02603791** **Diagnosed** : 20 Dec 2023
Unique Number : 5696876 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: Bottom, BottomAnalysis, FilterPatch, PrtFilter, TAN Man)

Cleveland Hydraulics
 1215 Highway 26
 Springwater, ON
 CA L9X 0G1
 Contact: Nigel Layton
 nigel@clevelandhydraulics.ca
 T: (647)332-7867
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.