


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



SCG2 HPU Component

Hydraulic System

AW HYDRAULIC OIL ISO 32 (--- LTR)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Feb-2021 Jul2022 Apr2023 Dec2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0793121	WC0793116	WC0546164
Sample Date		Client Info		17 Dec 2023	13 Apr 2023	28 Jul 2022
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	2
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	0
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	0
Lead	ppm	ASTM D5185(m)	>20	1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	18	15	13
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1	0	<1
Barium	ppm	ASTM D5185(m)	5	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	25	0	0	0
Calcium	ppm	ASTM D5185(m)	200	<1	0	<1
Phosphorus	ppm	ASTM D5185(m)	300	380	407	369
Zinc	ppm	ASTM D5185(m)	370	364	380	371
Sulfur	ppm	ASTM D5185(m)	2500	2647	2741	2637
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2	2	1
Sodium	ppm	ASTM D5185(m)		0	0	0
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1024	1577	746
Particles >6µm		ASTM D7647	>1300	172	386	156
Particles >14µm		ASTM D7647	>160	9	35	12
Particles >21μm		ASTM D7647	>40	3	10	4
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71μm		ASTM D7647	>3	0	1	0

ISO 4406 (c) >19/17/14


Oil Cleanliness

17/15/10

17/14/11



OIL ANALYSIS REPORT

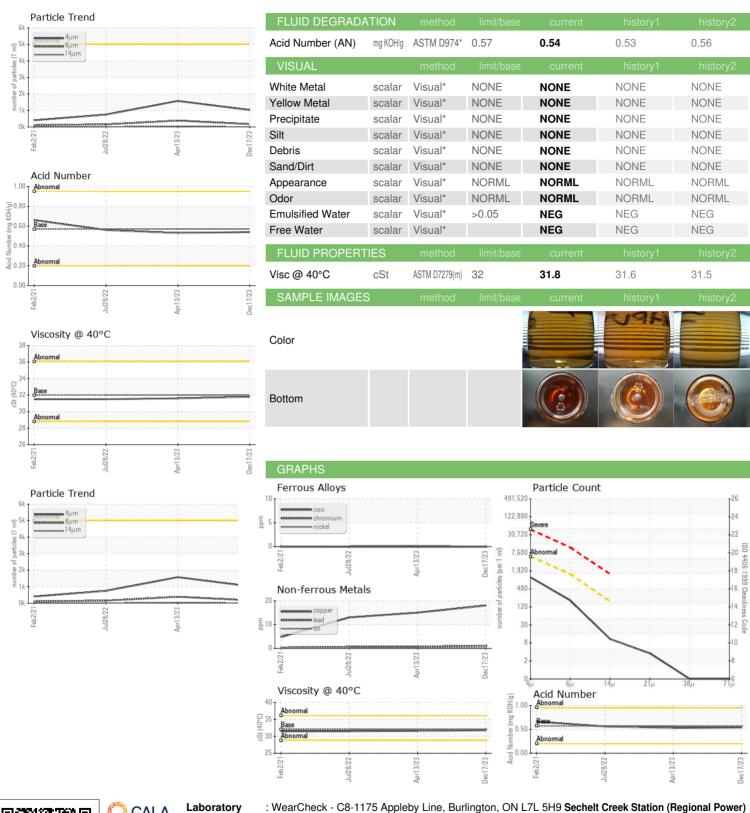



CALA ISO 17025:2017 Accredited

Laboratory

Report Id: REGSEC [WCAMIS] 02603798 (Generated: 12/19/2023 09:42:52) Rev: 1

Laboratory Sample No. Lab Number **Unique Number**

: WC0793121 : 02603798

Recieved Diagnosed : 5696883

: 18 Dec 2023 : 19 Dec 2023 Diagnostician Test Package : IND 2 (Additional Tests: TAN Man)

: Wes Davis

CA VON 3A0 Contact: Cory Mottishaw corymsgs@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T: F:

Sechelt Creek, BC

Unit 1A-5764 Wharf Road