




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

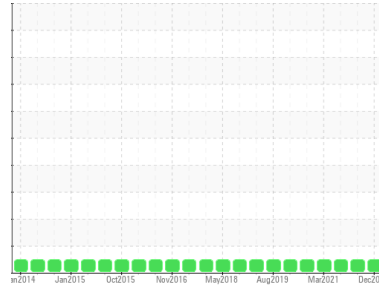

Machine Id
STBD CPP - Stbd Variable Pitch Prop (S/N 16520)

Component
Starboard Variable Pitch Prop

Fluid
MOBIL MOBILGEAR 600 XP ISO 68 (200 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0711999	WC0611574	WC0611606
Sample Date	Client Info			11 Dec 2023	08 Feb 2022	28 Aug 2021
Machine Age	hrs	Client Info		0	0	6745
Oil Age	hrs	Client Info		0	0	470
Oil Changed	Client Info			N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>25	3	14	10
Chromium	ppm	ASTM D5185(m)	>10	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>55	3	5	5
Tin	ppm	ASTM D5185(m)	>5	0	<1	1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		32	12	12
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		1	<1	<1
Calcium	ppm	ASTM D5185(m)		10	8	8
Phosphorus	ppm	ASTM D5185(m)		337	334	345
Zinc	ppm	ASTM D5185(m)		15	14	13
Sulfur	ppm	ASTM D5185(m)		7887	10343	10326
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2	<1	<1
Sodium	ppm	ASTM D5185(m)		<1	1	1
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	11486	18520	183
Particles >6µm		ASTM D7647	>5000	117	1785	73
Particles >14µm		ASTM D7647	>320	3	100	20
Particles >21µm		ASTM D7647	>80	1	24	6
Particles >38µm		ASTM D7647	>20	0	3	0
Particles >71µm		ASTM D7647	>4	1	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/15	21/14/9	21/18/14	15/13/11


Particle Trend

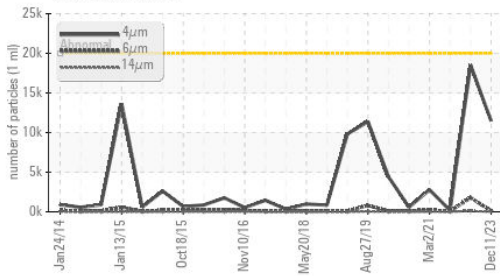


Acid Number

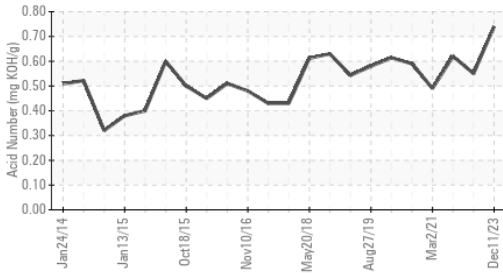

Viscosity @ 40°C

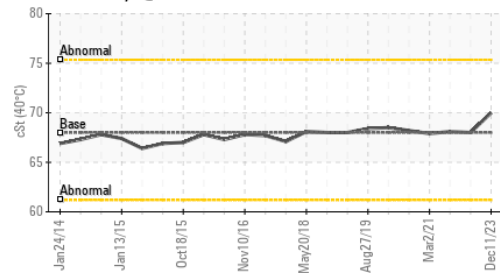

Particle Trend

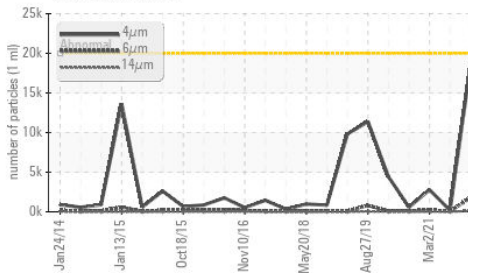

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D974*	0.74	0.55	0.62


VISUAL

method	limit/base	current	history1	history2
White Metal	Visual*	NONE	NONE	NONE
Yellow Metal	Visual*	NONE	NONE	NONE
Precipitate	Visual*	NONE	NONE	NONE
Silt	Visual*	NONE	NONE	NONE
Debris	Visual*	NONE	NONE	NONE
Sand/Dirt	Visual*	NONE	NONE	NONE
Appearance	Visual*	NORML	NORML	NORML
Odor	Visual*	NORML	NORML	NORML
Emulsified Water	Visual*	NEG	NEG	NEG
Free Water	Visual*	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C cSt	ASTM D7279(m)	70.0	68.0	68.1

SAMPLE IMAGES

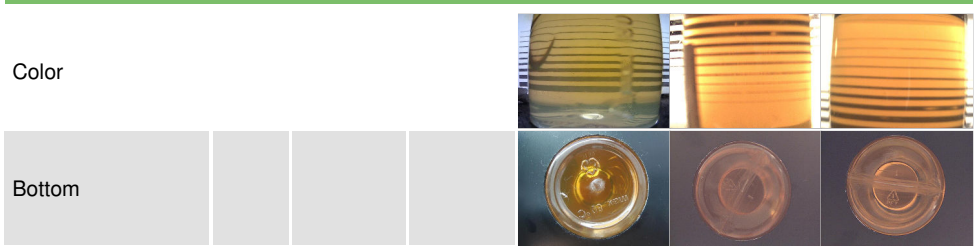


GRAPHS


Ferrous Alloys

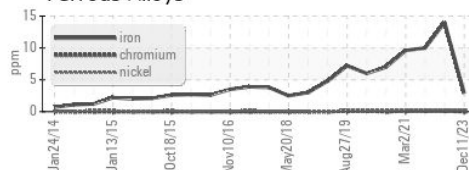


Non-ferrous Metals

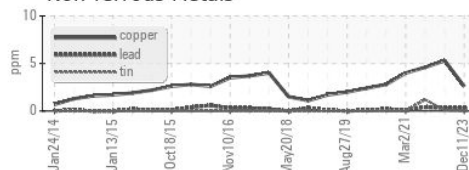


Viscosity @ 40°C

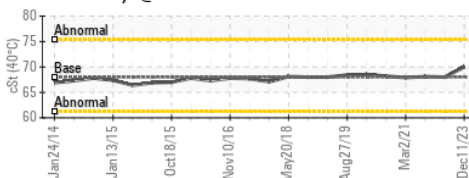

Particle Count

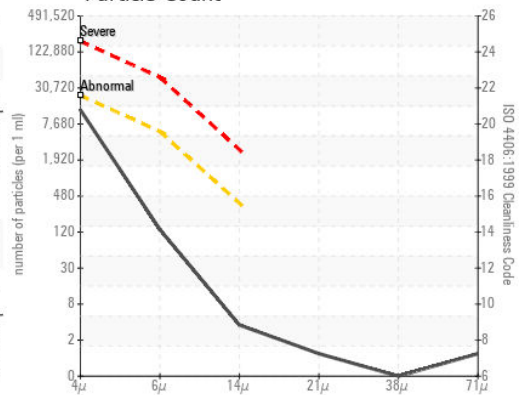

Acid Number

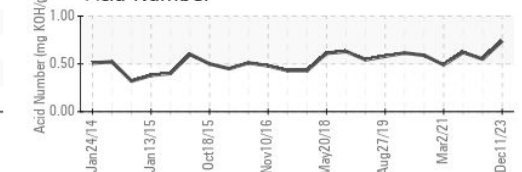

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Canadian Coast Guard - CCGS Constable Carriere
Sample No. : WC0711999 **Received** : 18 Dec 2023 867 Lakeshore Road
Lab Number : 02603809 **Diagnosed** : 19 Dec 2023 Burlington, ON
Unique Number : 5696894 **Diagnostician** : Wes Davis CA L7R 4A6
Test Package : MAR 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

Contact: Chief Engineer
constablecarriereCE@ccgs-ngcc.gc.ca

T: (705)542-2737

F: x: