




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

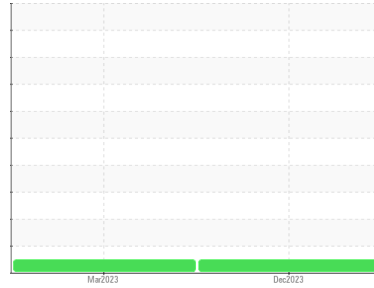

Area
[6564]
 Machine Id
62R

Component
Diesel Engine
 Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0846146	WC0790209	---
Sample Date	Client Info		07 Dec 2023	31 Mar 2023	---
Machine Age	kms	Client Info	193939	134510	---
Oil Age	kms	Client Info	0	0	---
Oil Changed	Client Info		Not Changed	Not Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	26	18	---
Chromium	ppm	ASTM D5185(m)	>6	4	2	---
Nickel	ppm	ASTM D5185(m)	>3	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	<1	---
Silver	ppm	ASTM D5185(m)	>2	<1	0	---
Aluminum	ppm	ASTM D5185(m)	>50	18	14	---
Lead	ppm	ASTM D5185(m)	>10	3	<1	---
Copper	ppm	ASTM D5185(m)	>50	77	13	---
Tin	ppm	ASTM D5185(m)	>6	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	132	63	---
Barium	ppm	ASTM D5185(m)	10	<1	0	---
Molybdenum	ppm	ASTM D5185(m)	100	13	19	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)	450	71	738	---
Calcium	ppm	ASTM D5185(m)	3000	2115	1462	---
Phosphorus	ppm	ASTM D5185(m)	1150	940	802	---
Zinc	ppm	ASTM D5185(m)	1350	1111	850	---
Sulfur	ppm	ASTM D5185(m)	4250	2831	2555	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>50	6	4	---
Sodium	ppm	ASTM D5185(m)		3	3	---
Potassium	ppm	ASTM D5185(m)	>20	55	31	---

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.4	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	10.0	9.9	---
Sulfation	Abs./1mm	ASTM D7415*	>30	26.1	24.7	---



OIL ANALYSIS REPORT







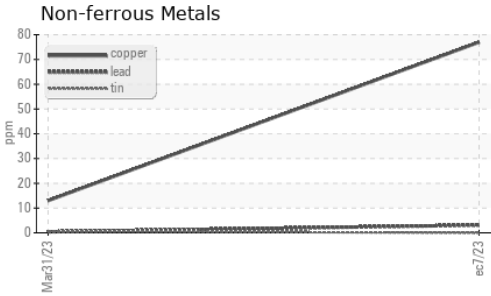
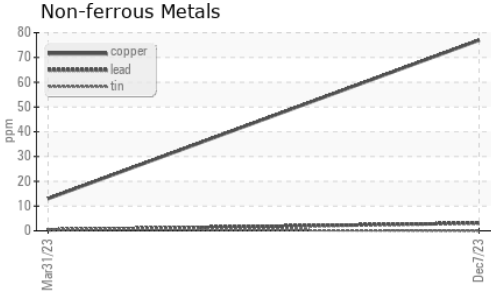


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	21.6	17.7	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	14.5	12.1	---

GRAPHS

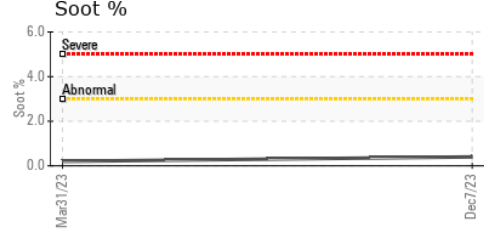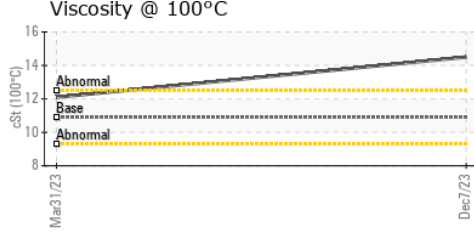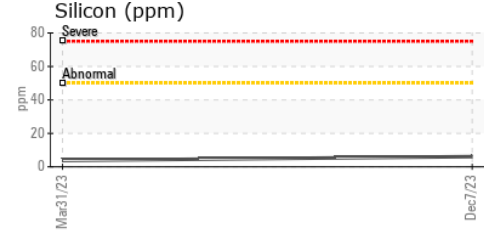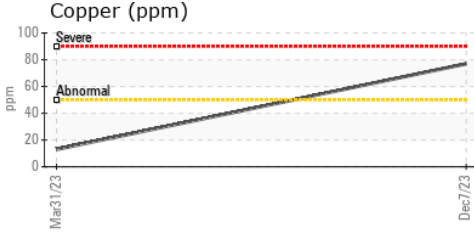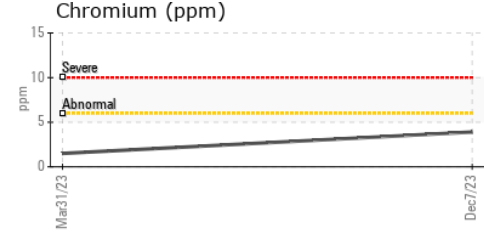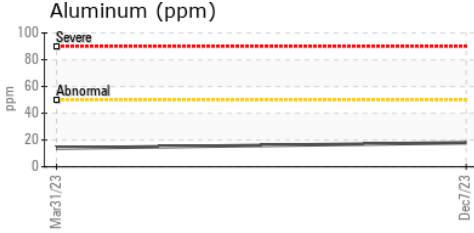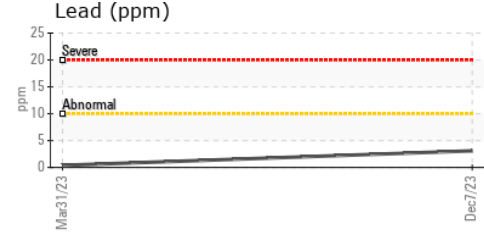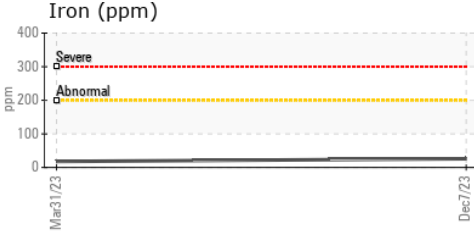

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0846146 **Received** : 19 Dec 2023
Lab Number : **02603988** **Diagnosed** : 19 Dec 2023
Unique Number : 5697073 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

CANADA CLEAN FUELS
 4425 CHESSWOOD DR
 TORONTO, ON
 CA M3J 2C2
 Contact: Rory Grant
 rgrant@canadacleanfuels.com
 T: (647)882-6850
 F: (416)521-9368

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.