




PROBLEM SUMMARY

Sample Rating Trend

INSOLUBLES




Area
Hyd. shack # 2
 Machine Id
Q400#1 (S/N 8424)
 Component
Hydraulic System
 Fluid
ESSO NUTO H ISO 32 (200 GAL)

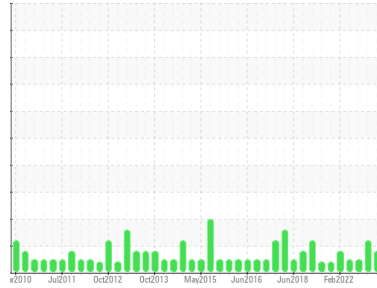

COMPONENT CONDITION SUMMARY

Varnish Potential

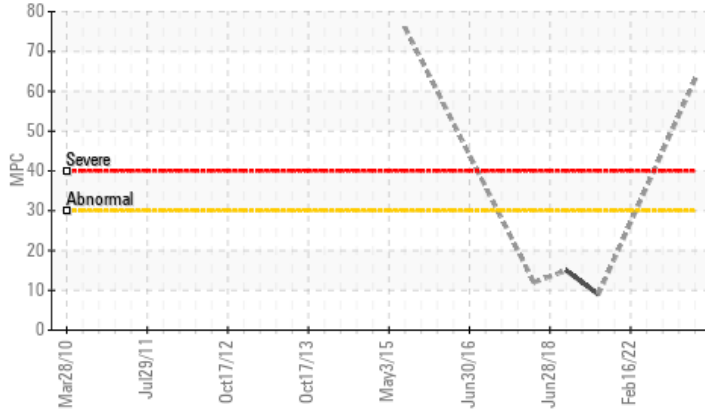

RECOMMENDATION

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | ATTENTION | NORMAL |
|-----------------------|-------|----------------|-----|--------|-----------|--------|
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | 63 | --- | --- |

Customer Id: FLITOR
 Sample No.: WC0777385
 Lab Number: 02604124
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1
 (289)291-4641 x4641
Bill.Quesnel@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|--------------|--------|------|---------|---|
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Filter Fluid | --- | --- | ? | We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. |

HISTORICAL DIAGNOSIS

20 May 2023 Diag: Wes Davis

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



06 Jan 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



07 Jul 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)






OIL ANALYSIS REPORT

Sample Rating Trend

INSOLUBLES



Area
Hyd. shack # 2
 Machine Id
Q400#1 (S/N 8424)
 Component
Hydraulic System
 Fluid
ESSO NUTO H ISO 32 (200 GAL)

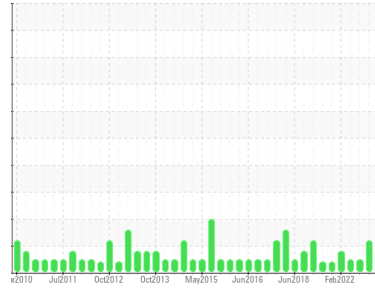

DIAGNOSIS

Recommendation

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0777385 | WC0670680 | WC0670683 |
| Sample Date | Client Info | | 18 Dec 2023 | 20 May 2023 | 06 Jan 2023 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | SEVERE | ATTENTION | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.05 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >20 | 2 | 1 | 1 |
| Chromium | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >10 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) >20 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) >20 | 2 | 1 | 1 |
| Tin | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | <1 | 0 | <1 |
| Barium | ppm | ASTM D5185(m) 0 | <1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 5 | <1 | <1 | <1 |
| Calcium | ppm | ASTM D5185(m) 50 | 29 | 33 | 35 |
| Phosphorus | ppm | ASTM D5185(m) 330 | 339 | 362 | 369 |
| Zinc | ppm | ASTM D5185(m) 420 | 347 | 355 | 363 |
| Sulfur | ppm | ASTM D5185(m) 2700 | 3621 | 3600 | 3766 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >15 | <1 | <1 | 0 |
| Sodium | ppm | ASTM D5185(m) | 1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | 0 | <1 |


FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|----------------|------------|----------|
| Particles >4µm | ASTM D7647 | >320 | 120 | ▲ 424 | 97 |
| Particles >6µm | ASTM D7647 | >80 | 46 | ▲ 107 | 34 |
| Particles >14µm | ASTM D7647 | >10 | 3 | 5 | 3 |
| Particles >21µm | ASTM D7647 | >3 | 1 | 2 | 0 |
| Particles >38µm | ASTM D7647 | >3 | 0 | 1 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 1 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >15/13/10 | 14/13/9 | ▲ 16/14/10 | 14/12/9 |




OIL ANALYSIS REPORT


Varnish Potential

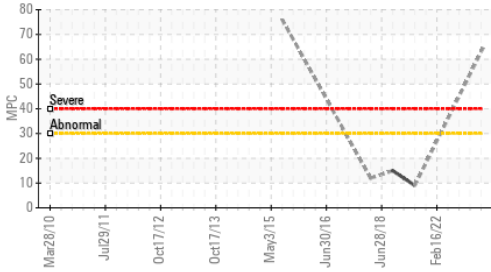


Particle Count

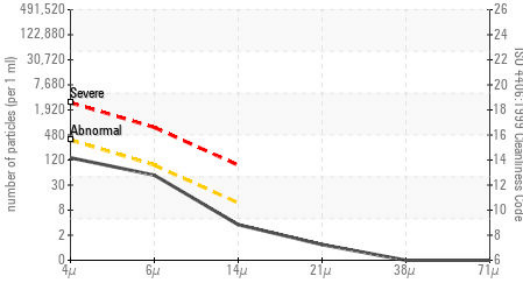


Acid Number

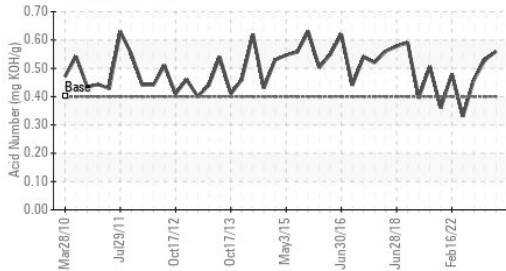

Viscosity @ 40°C

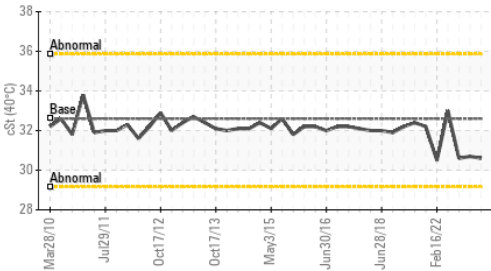

Particle Trend

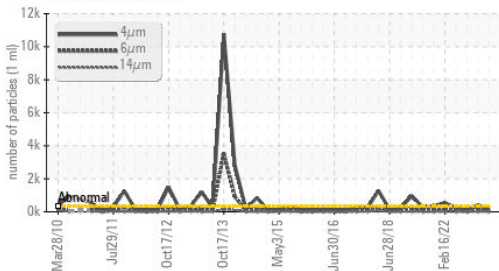

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-----------------------|----------|----------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | .40 | 0.56 | 0.53 | 0.46 |
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | 63 | --- | --- |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 32.6 | 30.6 | 30.7 | 30.6 |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|


Color



Bottom



MPC



ISO 17025:2017
Accredited
Laboratory

Laboratory

Sample No.

Lab Number

Unique Number

Test Package

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: WC0777385

: 02604124

: 5697209

: IND 2 (Additional Tests: MPC, TAN Man)

Received : 19 Dec 2023

Diagnosed : 31 Jan 2024

Diagnostician : Bill Quesnel

FLIGHTSAFETY CANADA LIMITED

95 GARRATT BOULEVARD

TORONTO, ON

CA M3K 2A5

Contact: Mark Gris

mark.gris@flightsafety.com

T: (416)638-9313

F: (416)638-3348

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)



Sample Color & Clarity



This page left intentionally blank