

OIL ANALYSIS REPORT

OPG Campbellford - 888064 A2312081

Component Bearing Fluid

PANOLIN TECSYNTH FLVG 220 (--- GAL)

Recommendation

This is a baseline read-out on the submitted sample.

Wear

{not applicable}

Contamination {not applicable}

				Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine ID		Client Info		RAMNEY FALLS GS		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Initial		
Sent to WC		Client Info		12/15/2023		
Sample Number		Client Info		E30000689		
Sample Date		Client Info		14 Dec 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	2		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		1		
Phosphorus	ppm	ASTM D5185(m)		185		
Zinc	ppm	ASTM D5185(m)		21		
Sulfur	ppm	ASTM D5185(m)		53		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	3		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	>2	0.004		
ppm Water	ppm	ASTM D6304*		46		




Sample Rating Trend




NORMAL



OIL ANALYSIS REPORT

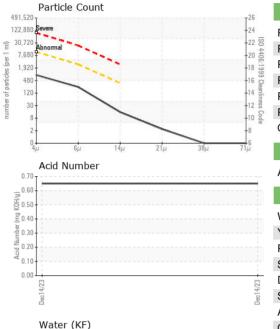

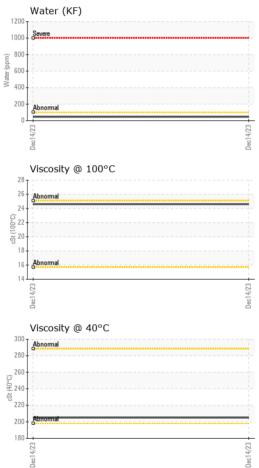

	NESS	method				history2
Particles >4µm		ASTM D7647	>10000	777		
Particles >6µm		ASTM D7647		207		
Particles >14µm		ASTM D7647	>320	13		
Particles >21µm		ASTM D7647		2		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647		0		
Dil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.65		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>2	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D7279(m)		205		
√isc @ 100°C	cSt	ASTM D7279(m)		24.6		
Viscosity Index (VI)	Scale	ASTM D2270*		149		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

Laboratory CALA Sample No. : E30000689 Recieved : 19 Dec 2023 640 Victoria Street Cobourg, ON Lab Number : 02604273 Diagnosed : 22 Dec 2023 ISO 17025:2017 Accredited Laboratory Unique Number : 5697358 Diagnostician : Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) Contact: Tatiana Sorkina To discuss this sample report, contact Customer Service at 1-905-372-2251. tsorkina@e360s.ca T: (800)263-3939 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950