




GREASE ANALYSIS

Sample Rating Trend

NORMAL

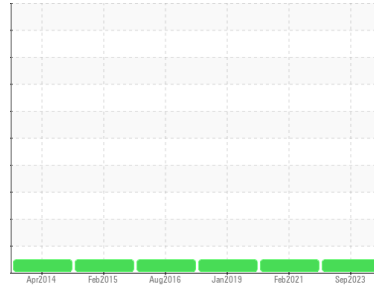

Machine Id
APM 2 - Drive Room Deflection Bull Wheel (S/N 2DDB)

Component
Grease
Fluid
MOBIL SHC GREASE 460 WT (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Grease Condition

The condition of the grease is acceptable for the time in service.

Contaminants

There is no indication of any contamination in the grease.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0841109	WC0474286	WC012119
Sample Date	Client Info			12 Sep 2023	19 Feb 2021	21 Jan 2019
Machine Age	hrs	Client Info		0	8984	29272
Grease Age	hrs	Client Info		0	0	0
Grease Serviced	Client Info			Not Chngd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	0	0	10
Iron	ppm	ASTM D5185(m)	>250	1	2	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Cadmium	ppm	ASTM D5185(m)		0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Lead	ppm	ASTM D5185(m)	>25	0	0	0
Copper	ppm	ASTM D5185(m)	>75	<1	<1	0
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)		0	<1	1
Manganese	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Phosphorus	ppm	ASTM D5185(m)		61	94	137
Zinc	ppm	ASTM D5185(m)		90	149	223
Antimony	ppm	ASTM D5185(m)		0	0	0

THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	<1	0
Calcium	ppm	ASTM D5185(m)		1	1	2
Sodium	ppm	ASTM D5185(m)		2	1	<1
Lithium	ppm	ASTM D5185(m)		606	673	596
Sulfur	ppm	ASTM D5185(m)		728	747	719

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	0	<1	2
Potassium	ppm	ASTM D5185(m)		<1	<1	0



GREASE CONDITION		method	limit/base	current	history1	history2
Grease Color	Visual*		Red	Red	Red	Red
Texture	In-house*			Short fiber	Long fiber	Short fiber
NLGI Consistency	NLGI Scale	SKF Method*	1.5	2	1-2	3

GREASE ANALYSIS

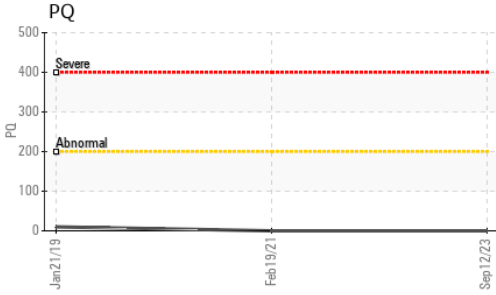

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					

GRAPHS

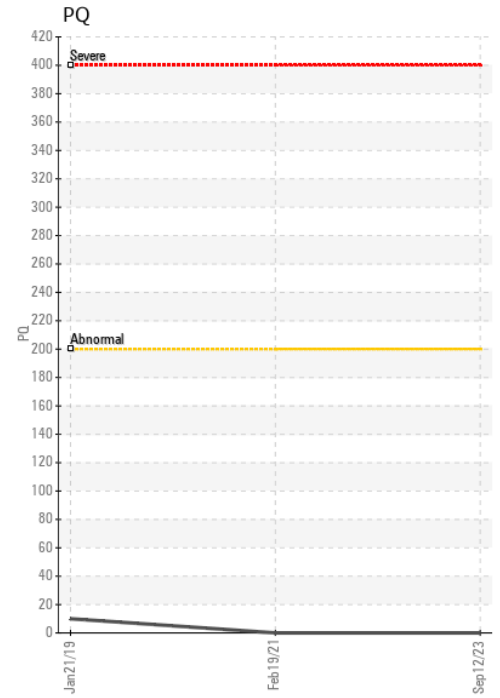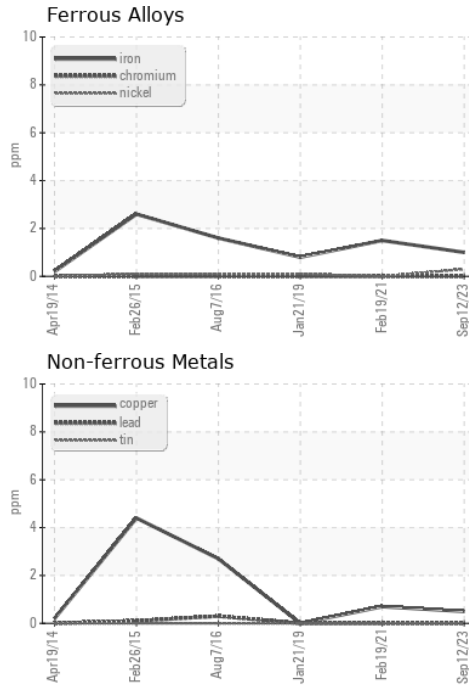

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0841109
Lab Number : 02604278
Unique Number : 5697363
Test Package : GRS 1 (Additional Tests: BottomAnalysis)

DCC DOPPELMAYR CABLE CAR
 6100 VISCOUNT RD, GENERAL DELIVERIES 2ND FLOOR
 MISSISSAUGA, ON
 CA L9V 0A1
 Contact: Dave Simpson
 dsimpson@dccooperations.com
 T: (905)612-8630
 F: (905)612-0626

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*