

# **GREASE ANALYSIS**

### Sa

# Sample Rating Trend NORMAL

# DRIVE ROOM MAIN BULL

Component

Grease

MOBIL SHC GREASE 460 WT (--- GAL)

### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### **Grease Condition**

The condition of the grease is acceptable for the time in service.


### Contaminants

There is no indication of any contamination in the grease.

				Sep2023		
SAMPLE INFORM	//ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		wc		
Sample Date		Client Info		12 Sep 2023		
Machine Age	hrs	Client Info		0		
Grease Age	hrs	Client Info		0		
Grease Serviced		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	50		
Iron	ppm	ASTM D5185(m)	>250	10		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>5	<1		
Cadmium	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)	>75	5		
Tin	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	>5	0		
ADDITIVES		method				history2
					,	,
Boron	ppm	ASTM D5185(m)		0		
Boron Magnesium	ppm ppm			0 <1		
Magnesium Manganese		ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1		
Magnesium Manganese Molybdenum	ppm	ASTM D5185(m) ASTM D5185(m)		<1 0 0		
Magnesium Manganese Molybdenum Phosphorus	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1 0 0 52		
Magnesium Manganese Molybdenum Phosphorus Zinc	ppm ppm	ASTM D5185(m)		<1 0 0 52 82		
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		<1 0 0 52		
Magnesium Manganese Molybdenum Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82		
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current	   	
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  METHOD  ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1	     history1	    history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0	     history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2	    history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2 3 637	history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2	    history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2 3 637	history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m)		<1 0 0 52 82 0 current <1 0 2 3 637 705	history1	history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur CONTAMINANTS	ppm	ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2 3 637 705 current	history1 history1	history2 history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m)	limit/base	<1 0 0 52 82 0 current <1 0 2 3 637 705 current 1	history1 history1 history1	history2 history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur CONTAMINANTS Silicon Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  METHOD  ASTM D5185(m)	limit/base >150	<1 0 0 52 82 0 current <1 0 2 3 637 705 current 1 <1	history1 history1 history1	history2 history2 history2
Magnesium Manganese Molybdenum Phosphorus Zinc Antimony THICKENER/SOA Aluminum Barium Calcium Sodium Lithium Sulfur CONTAMINANTS Silicon Potassium GREASE CONDIT	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m) ASTM D5185(m)  METHOD	limit/base >150	<1 0 0 52 82 0 current <1 0 2 3 637 705 current 1 <1 current	history1 history1 history1	history2 history2 history2 history2



## **GREASE ANALYSIS**

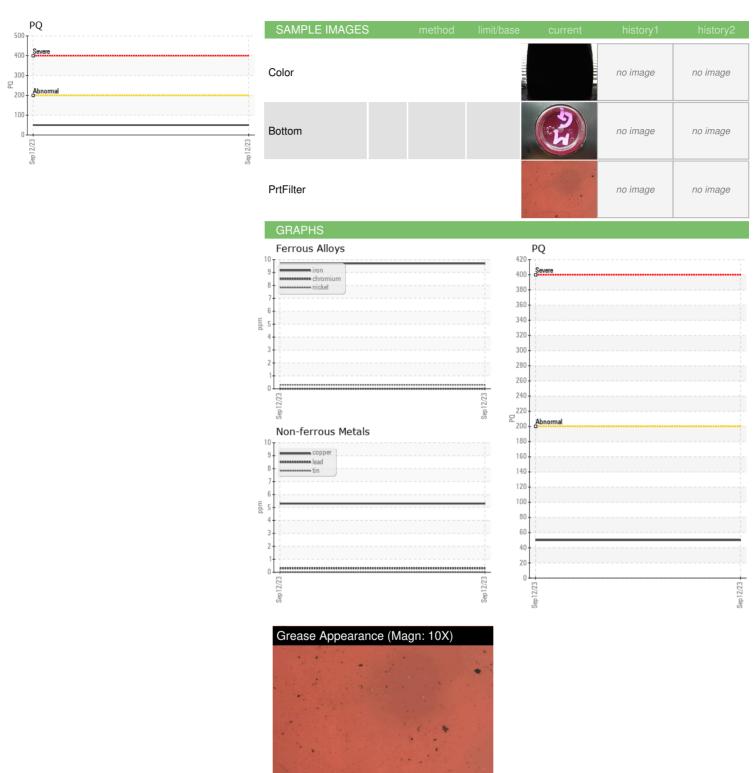



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number : 5697367

: WC : 02604282

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Recieved

Diagnosed

: 19 Dec 2023 : 21 Dec 2023 Diagnostician : Bill Quesnel **Test Package**: GRS 1 (Additional Tests: BottomAnalysis)

DCC DOPPELMAYR CABLE CAR 6100 VISCOUNT RD, GENERAL DELIVERIES 2ND FLOOR MISSISSAUGA, ON

CA L9V 0A1 Contact: Dave Simpson dsimpson@dccoperations.com

T: (905)612-8630

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

F: (905)612-0626