



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[64423]
Machine Id
VOLVO VNL 4430

Component
Diesel Engine
Fluid
PETRO CANADA DURON SAE 10W30 (--- GAL)



DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
Metal levels are typical for a new component breaking in.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0869696	---	---
Sample Date	Client Info		16 Dec 2023	---	---
Machine Age	mths	Client Info	64	---	---
Oil Age	mths	Client Info	10	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >100	103	---	---
Chromium	ppm	ASTM D5185(m) >20	2	---	---
Nickel	ppm	ASTM D5185(m) >2	2	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >2	<1	---	---
Aluminum	ppm	ASTM D5185(m) >25	8	---	---
Lead	ppm	ASTM D5185(m) >40	2	---	---
Copper	ppm	ASTM D5185(m) >330	13	---	---
Tin	ppm	ASTM D5185(m) >15	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 1	6	---	---
Barium	ppm	ASTM D5185(m) 1	<1	---	---
Molybdenum	ppm	ASTM D5185(m) 1	59	---	---
Manganese	ppm	ASTM D5185(m) 1	1	---	---
Magnesium	ppm	ASTM D5185(m) 10	914	---	---
Calcium	ppm	ASTM D5185(m) 2942	1155	---	---
Phosphorus	ppm	ASTM D5185(m) 1102	962	---	---
Zinc	ppm	ASTM D5185(m) 1351	1146	---	---
Sulfur	ppm	ASTM D5185(m) 3903	2259	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	10	---	---
Sodium	ppm	ASTM D5185(m)	4	---	---
Potassium	ppm	ASTM D5185(m) >20	3	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.9	---	---
Nitration	Abs/cm	ASTM D7624* >20	12.2	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	25.9	---	---



OIL ANALYSIS REPORT

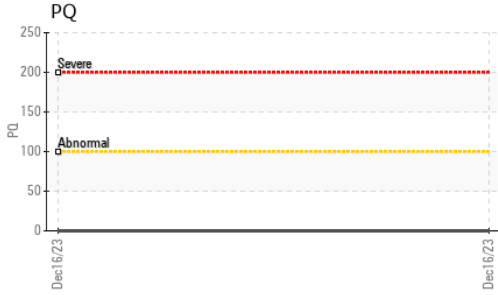

FLUID DEGRADATION	method	limit/base	current	history1	history2
-------------------	--------	------------	---------	----------	----------

Oxidation	Abs/.1mm	ASTM D7414*	>25	23.7	---	---
-----------	----------	-------------	-----	-------------	-----	-----

VISUAL	method	limit/base	current	history1	history2
--------	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
------------------	--------	---------	------	------------	-----	-----

Free Water	scalar	Visual*		NEG	---	---
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	11.4	11.3	---	---
--------------	-----	---------------	------	-------------	-----	-----

GRAPHS

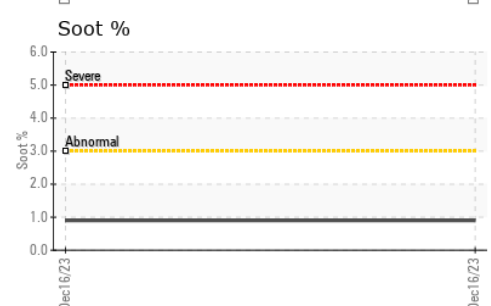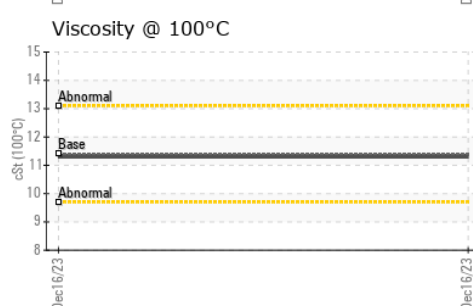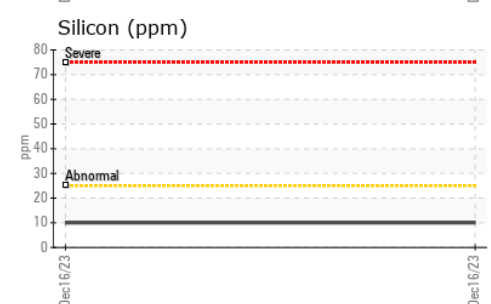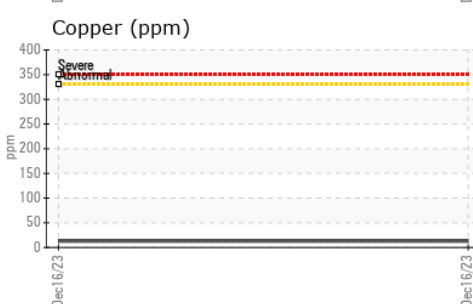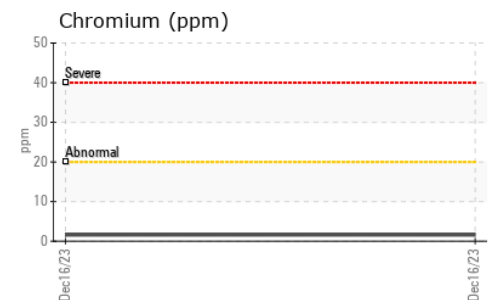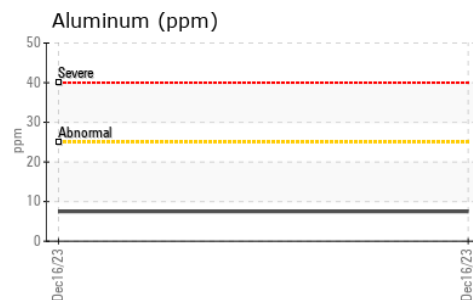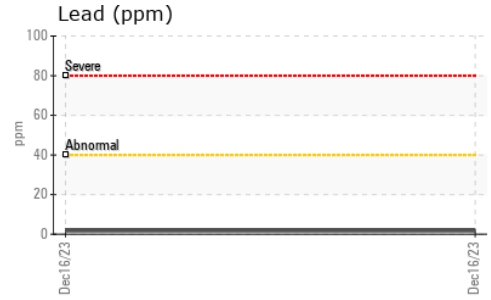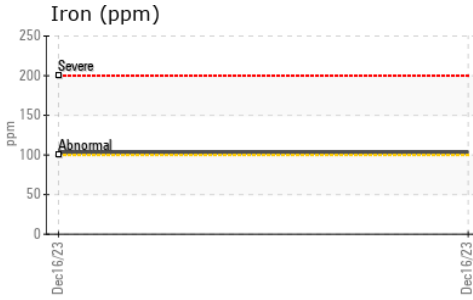

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 PERFORMANCE EQUIPMENT - VISION TRUCK
Sample No. : WC0869696 **Received** : 20 Dec 2023
Lab Number : 02604307 **Diagnosed** : 20 Dec 2023
Unique Number : 5697392 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

415 EVANS AVENUE
 ETOBICOKE, ON
 CA M8W 0B3
 Contact: Service
 etobservice@visiontruckgroup.com

T:
F: