




OIL ANALYSIS REPORT

Sample Rating Trend

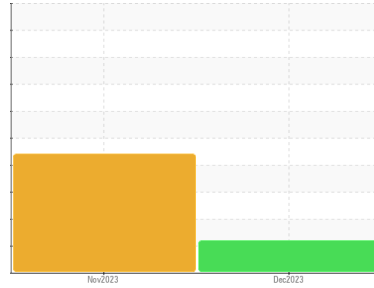

FUEL



Machine Id
HONDA 2HKRS4H78PH105912

Component
Gasoline Engine
Fluid
SAE 0W20 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0708979	WC0708969	---
Sample Date	Client Info		13 Dec 2023	01 Nov 2023	---
Machine Age	kms	Client Info	11725	10736	---
Oil Age	kms	Client Info	0	0	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	SEVERE	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	0.0	---

WEAR METALS	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>150	21	98	---
Chromium	ppm	ASTM D5185(m)	>20	<1	2	---
Nickel	ppm	ASTM D5185(m)	>5	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>40	9	31	---
Lead	ppm	ASTM D5185(m)	>50	<1	15	---
Copper	ppm	ASTM D5185(m)	>155	10	44	---
Tin	ppm	ASTM D5185(m)	>10	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	<1	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---




ADDITIVES	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		160	80	---
Barium	ppm	ASTM D5185(m)		<1	2	---
Molybdenum	ppm	ASTM D5185(m)		156	627	---
Manganese	ppm	ASTM D5185(m)		5	27	---
Magnesium	ppm	ASTM D5185(m)		402	12	---
Calcium	ppm	ASTM D5185(m)		1232	1551	---
Phosphorus	ppm	ASTM D5185(m)		638	592	---
Zinc	ppm	ASTM D5185(m)		695	671	---
Sulfur	ppm	ASTM D5185(m)		2372	2016	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	41	▲ 177	---
Sodium	ppm	ASTM D5185(m)	>400	3	13	---
Potassium	ppm	ASTM D5185(m)	>20	7	40	---
Fuel	%	ASTM D7593*	>4.0	▲ 6.2	◆ 8	---

INFRA-RED	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	8.3	13.0	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.5	30.3	---



OIL ANALYSIS REPORT

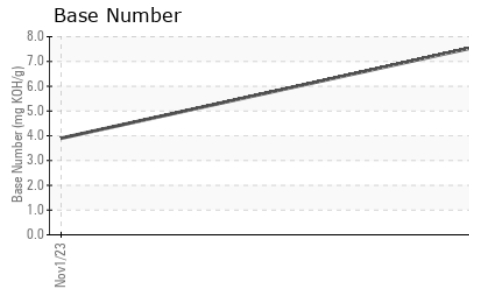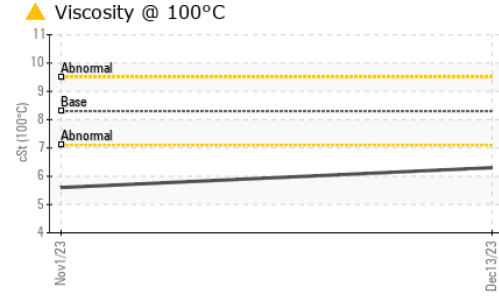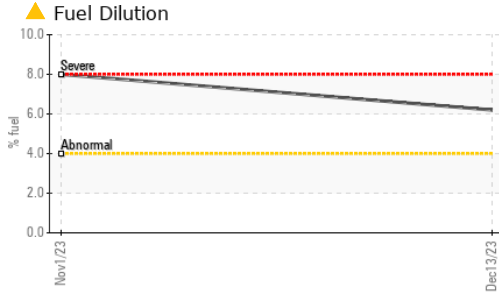


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	11.8	27.1	---
Base Number (BN)	mg KOH/g	ASTM D2896*		7.73	3.90	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	8.3	▲ 6.3	● 5.6	---

GRAPHS

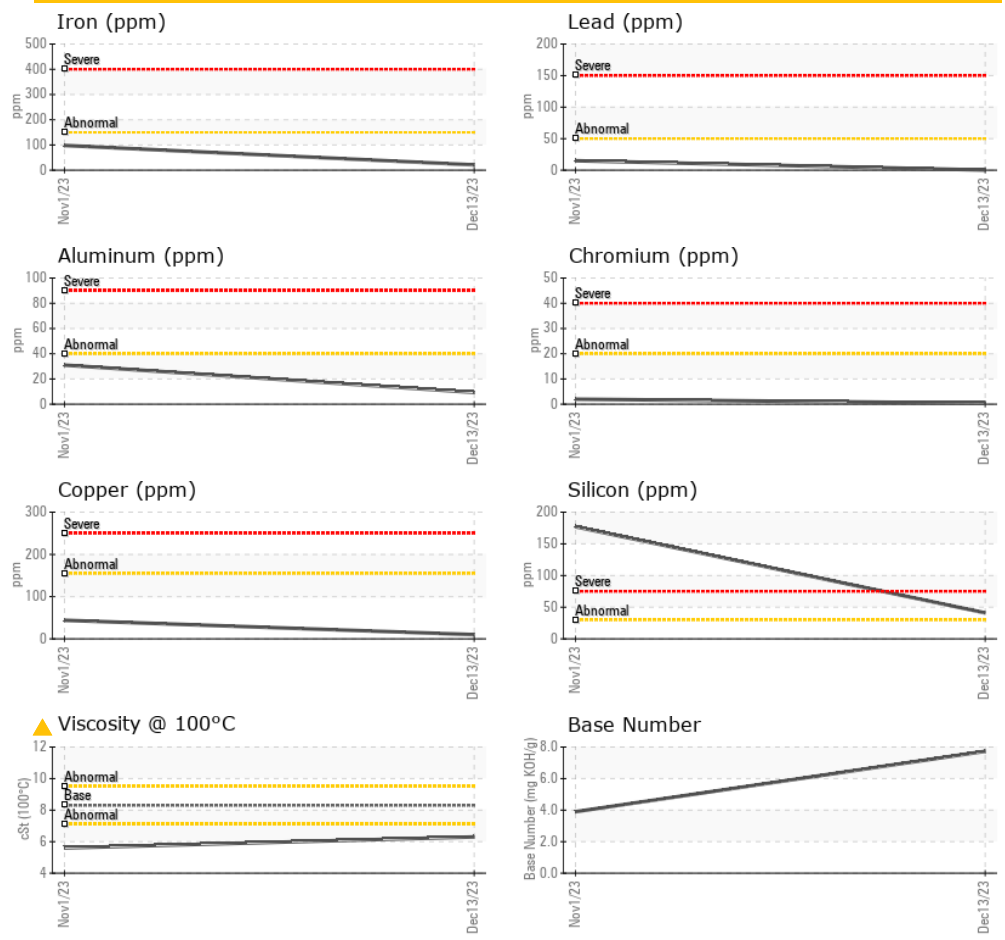

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0708979 **Received** : 20 Dec 2023
Lab Number : 02604404 **Diagnosed** : 22 Dec 2023
Unique Number : 5697489 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: PercentFuel)

HONDA CANADA INC.
 180 HONDA BLVD
 MARKHAM, ON
 CA L6C 0H9
 Contact: Marc St Arnaud
 marc_starnaud@ch.honda.com
 T:
 F: (416)287-4500

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.