


Chem-Ecol

A2312082

OIL ANALYSIS REPORT

Sample Rating Trend







Component Unknown Component Fluid CHEM-ECOL LUBECUT 101 (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

Wear

Copper and iron ppm levels are noted.


Contamination {not applicable}


Fluid Condition {not applicable}


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		2959-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		12/18/2023		
Sample Number		Client Info		E30001010		
Sample Date		Client Info		15 Dec 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		26		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		2		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		2		
Lead	ppm	ASTM D5185(m)		2		
Copper	ppm	ASTM D5185(m)		23		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		166		
Calcium	ppm	ASTM D5185(m)		1786		
Phosphorus	ppm	ASTM D5185(m)		583		
Zinc	ppm	ASTM D5185(m)		668		
Sulfur	ppm	ASTM D5185(m)		2585		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		2		
Sodium	ppm	ASTM D5185(m)		8		
Potassium	ppm	ASTM D5185(m)	>20	2		
Water	%	ASTM D6304*		0.041		
ppm Water	ppm	ASTM D6304*		411		



OIL ANALYSIS REPORT

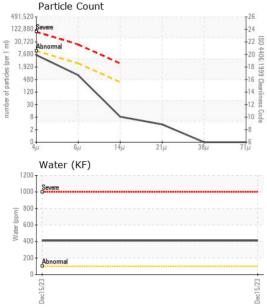



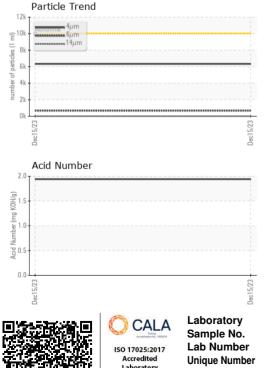

FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	6332		
Particles >6µm		ASTM D7647	>2500	681		
Particles >14µm		ASTM D7647	>320	7		
Particles >21µm		ASTM D7647	>80	3		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/17/10		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.94		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	108		
Visc @ 100°C	cSt	ASTM D7279(m)		6		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom				And the second s	no image	no image

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Environmental 360 Solutions Ltd. : E30001010 Recieved : 20 Dec 2023 640 Victoria Street : 02604418 Diagnosed : 22 Dec 2023 Cobourg, ON Accredited Laboratory Unique Number : 5697503 Diagnostician : Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) Contact: Tatiana Sorkina To discuss this sample report, contact Customer Service at 1-905-372-2251. tsorkina@e360s.ca T: (800)263-3939 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950