




OIL ANALYSIS REPORT

Sample Rating Trend

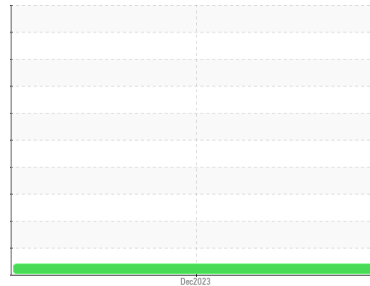

VISCOSITY



Machine Id
MITSUBISHI KU601836

Component
Reference Transmission (Auto)

Fluid
MITSUBISHI J4 CVT TRANS FLUID (--- QTS)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.
Diagnostician's Note: Sample matches Mitsubishi J4 CVT Transmission Fluid, however, the viscosity was higher than typical for this product (KV40C tested twice, 30.2 and 30.2 cSt each time).

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

▲ Fluid Condition

The viscosity of the fluid is higher than normal, possibly indicating the addition of a heavier grade of fluid. The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0889874	---	---
Sample Date	Client Info		14 Dec 2023	---	---
Machine Age	hrs	Client Info	64446	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >160	23	---	---
Chromium	ppm	ASTM D5185(m) >5	0	---	---
Nickel	ppm	ASTM D5185(m) >5	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >5	0	---	---
Aluminum	ppm	ASTM D5185(m) >50	7	---	---
Lead	ppm	ASTM D5185(m) >50	<1	---	---
Copper	ppm	ASTM D5185(m) >225	5	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 140	146	---	---
Barium	ppm	ASTM D5185(m) 0	1	---	---
Molybdenum	ppm	ASTM D5185(m) 0	0	---	---
Manganese	ppm	ASTM D5185(m) 0	<1	---	---
Magnesium	ppm	ASTM D5185(m) 1	1	---	---
Calcium	ppm	ASTM D5185(m) 280	238	---	---
Phosphorus	ppm	ASTM D5185(m) 290	414	---	---
Zinc	ppm	ASTM D5185(m) 0	6	---	---
Sulfur	ppm	ASTM D5185(m) 980	705	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	10	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	1	---	---



OIL ANALYSIS REPORT

▲ Viscosity @ 40°C











VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	---	---
Precipitate	scalar	Visual*	NONE	---	---
Silt	scalar	Visual*	NONE	---	---
Debris	scalar	Visual*	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	---	---
Appearance	scalar	Visual*	NORML	---	---
Odor	scalar	Visual*	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	---	---
Free Water	scalar	Visual*	---	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	26.3 ▲ 30.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

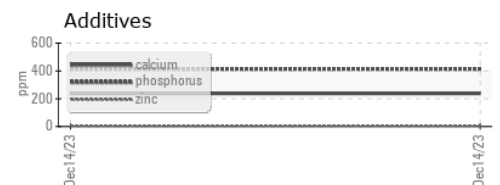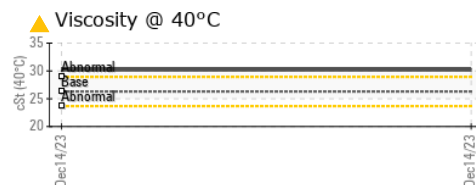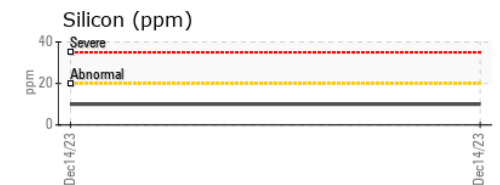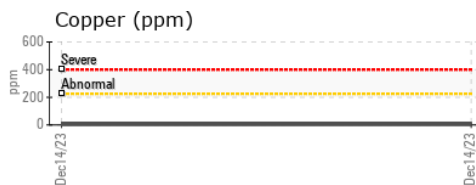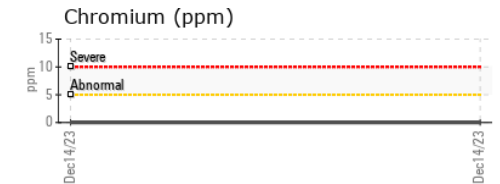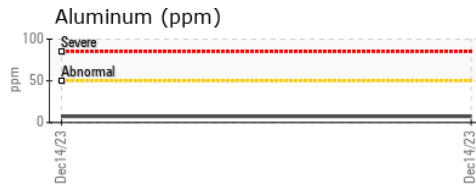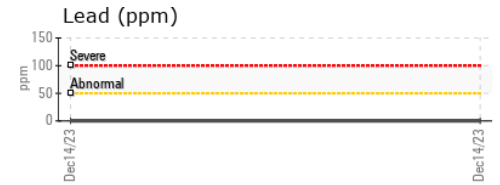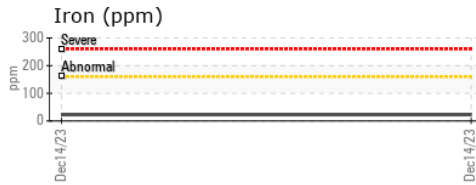

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : WC0889874 Recieved : 20 Dec 2023
 Lab Number : 02604447 Diagnosed : 17 Jan 2024
 Unique Number : 5697532 Diagnostician : Bill Quesnel
 Test Package : MOB 1

DONNELLY MITSUBISHI
 492 TERRY FOX DRIVE
 KENATA, ON
 CA K2T 1L3
 Contact: Matt Thibault
 mthibault@tdag.ca
 T: (613)260-4248
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.