




OIL ANALYSIS REPORT

Sample Rating Trend

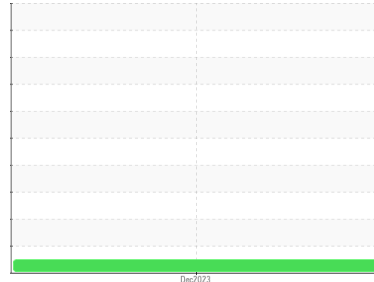

NORMAL



Machine Id
DOOSAN DX140LC NOUNITWC0811304

Component
Hydraulic System

Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0811304 | --- | --- |
| Sample Date | Client Info | | 08 Dec 2023 | --- | --- |
| Machine Age | hrs | Client Info | 1052 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >20 | 3 | --- | --- |
| Chromium | ppm | ASTM D5185(m) >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185(m) >10 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) >10 | <1 | --- | --- |
| Lead | ppm | ASTM D5185(m) >10 | 2 | --- | --- |
| Copper | ppm | ASTM D5185(m) >75 | 66 | --- | --- |
| Tin | ppm | ASTM D5185(m) >10 | 0 | --- | --- |
| Antimony | ppm | ASTM D5185(m) | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | 0 | --- | --- |

ADDITIVES


| | method | limit/base | current | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | <1 | --- | --- |
| Barium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | 0 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | 1 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | 112 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | 547 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | 677 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | 1093 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >20 | 4 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | --- | --- |



OIL ANALYSIS REPORT

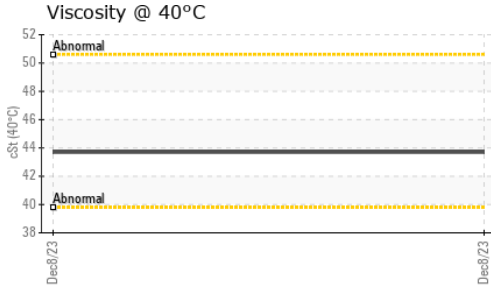









| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | --- | --- |
| Free Water | scalar | Visual* | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 43.7 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | |
|--------|--|--|--|----------|----------|
| Color | | | | no image | no image |
| Bottom | | | | no image | no image |

GRAPHS

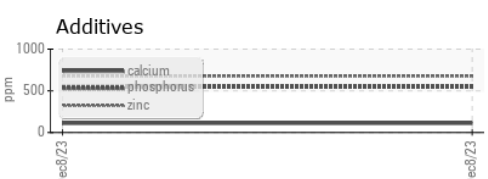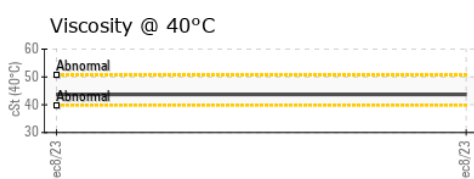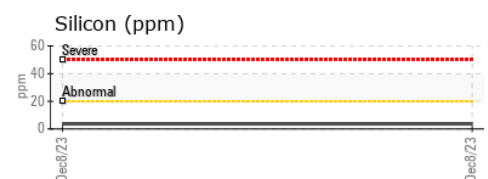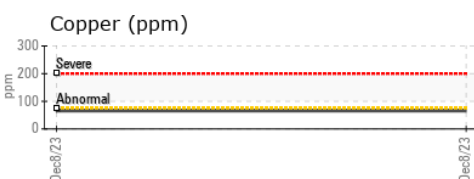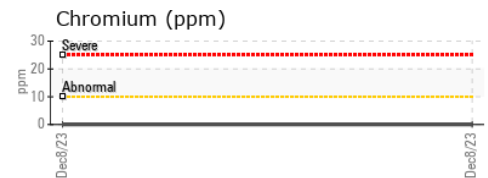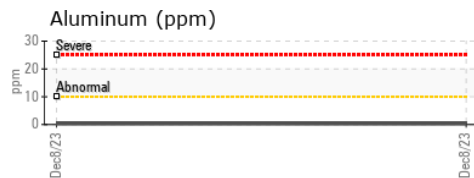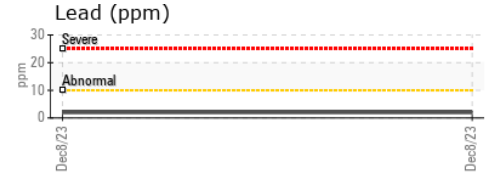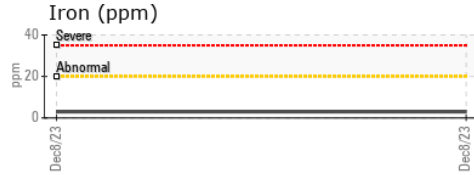

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0811304 **Received** : 21 Dec 2023
Lab Number : **02604657** **Diagnosed** : 21 Dec 2023
Unique Number : 5697742 **Diagnostician** : Wes Davis
Test Package : MOB 1

CONESTOGA COLLEGE
 460 Speedvale Drive
 Guelph, ON
 CA N1H 0A8
 Contact: Duane Houle
 dhoule@conestogac.on.ca
 T: (519)498-7450
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.