



# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**

Area  
**[64529]**  
 Machine Id  
**VOLVO VNR660 4617**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 30 (--- GAL)**



## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Nickel ppm levels are abnormal. Exhaust valve wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0869699</b>	WC0816585	---
Sample Date	Client Info		<b>20 Dec 2023</b>	05 May 2023	---
Machine Age	kms	Client Info	<b>298851</b>	199201	---
Oil Age	kms	Client Info	<b>99650</b>	106288	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	0.6	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>42</b>	42
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	1
Nickel	ppm	ASTM D5185(m)	>2	<b>▲ 3</b>	▲ 6
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1
Aluminum	ppm	ASTM D5185(m)	>25	<b>7</b>	11
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	4
Copper	ppm	ASTM D5185(m)	>330	<b>16</b>	39
Tin	ppm	ASTM D5185(m)	>15	<b>2</b>	3
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>4</b>	5
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>58</b>	64
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	2
Magnesium	ppm	ASTM D5185(m)	450	<b>851</b>	838
Calcium	ppm	ASTM D5185(m)	3000	<b>1103</b>	1366
Phosphorus	ppm	ASTM D5185(m)	1150	<b>920</b>	943
Zinc	ppm	ASTM D5185(m)	1350	<b>1086</b>	1134
Sulfur	ppm	ASTM D5185(m)	4250	<b>2579</b>	2204
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>9</b>	13
Sodium	ppm	ASTM D5185(m)	>75	<b>3</b>	4
Potassium	ppm	ASTM D5185(m)	>20	<b>10</b>	24


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.7</b>	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.2</b>	12.1
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>24.9</b>	25.2



# OIL ANALYSIS REPORT

### ▲ Ferrous Alloys

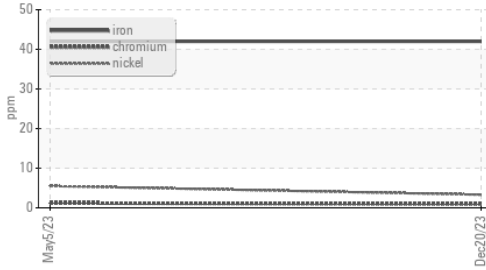

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	21.2	---

### VISUAL


method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	---
scalar	Visual*	NEG	NEG	---

### FLUID PROPERTIES


method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	10.9	11.0	---

### GRAPHS

### Viscosity @ 100°C

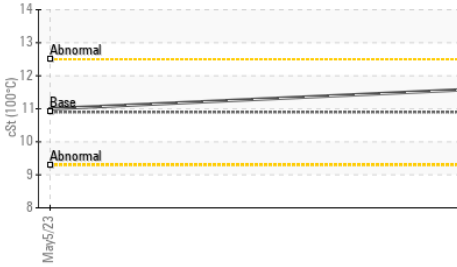


### Iron (ppm)

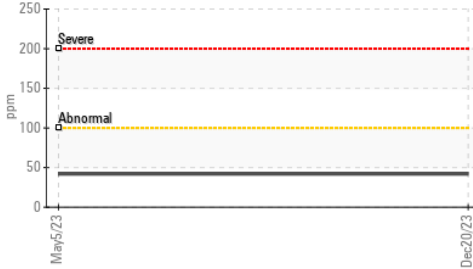


### Lead (ppm)




### Aluminum (ppm)

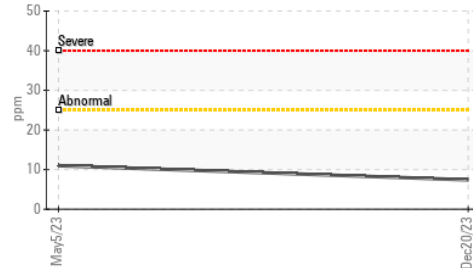


### Chromium (ppm)

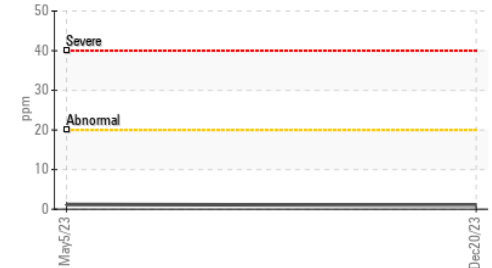


### Copper (ppm)

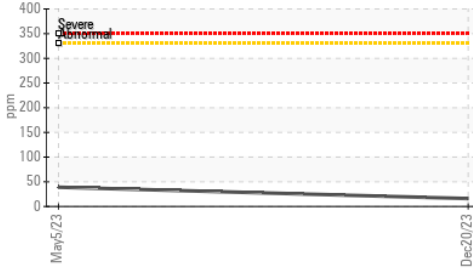

### Silicon (ppm)

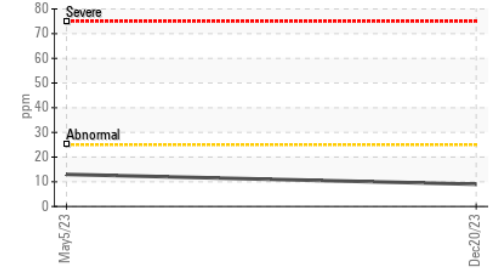

### Viscosity @ 100°C

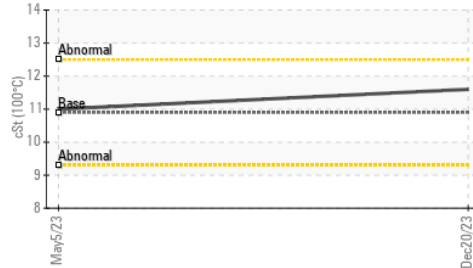

### Soot %



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 PERFORMANCE EQUIPMENT - VISION TRUCK  
**Sample No.** : WC0869699 **Received** : 22 Dec 2023  
**Lab Number** : 02604879 **Diagnosed** : 22 Dec 2023  
**Unique Number** : 5697964 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

415 EVANS AVENUE  
 ETOBICOKE, ON  
 CA M8W 0B3  
 Contact: Service  
 etobservice@visiontruckgroup.com

T:  
F: