




OIL ANALYSIS REPORT

Sample Rating Trend

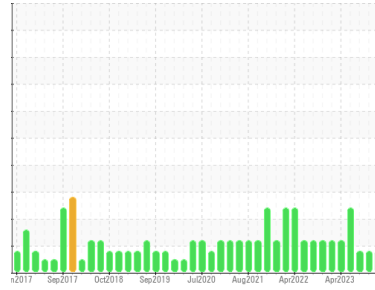

FUEL



Machine Id
CUMMINS 161

Component
Rear Diesel Engine

Fluid
ESSO XD-3 EXTRA 15W40 (24 LTR)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0866488	WC0866566	WC0816412
Sample Date	Client Info		20 Dec 2023	24 Oct 2023	10 Aug 2023
Machine Age	kms	Client Info	0	0	0
Oil Age	kms	Client Info	9601	9825	9212
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	29	36	32
Chromium	ppm	ASTM D5185(m)	>5	2	1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	3	3	3
Lead	ppm	ASTM D5185(m)	>25	<1	1	1
Copper	ppm	ASTM D5185(m)	>100	1	2	1
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		72	62	53
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		<1	1	7
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		16	24	88
Calcium	ppm	ASTM D5185(m)	3780	2254	2112	2057
Phosphorus	ppm	ASTM D5185(m)	1370	956	873	910
Zinc	ppm	ASTM D5185(m)	1500	1137	1077	1066
Sulfur	ppm	ASTM D5185(m)	3800	2875	2584	2638
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	6	5
Sodium	ppm	ASTM D5185(m)	>192	2	4	3
Potassium	ppm	ASTM D5185(m)	>20	7	5	6
Fuel	%	ASTM D7593*	>3.0	▲ 5.3	▲ 5.9	▲ 4.4

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	1.3	1.3	1.1
Nitration	Abs/cm	ASTM D7624*	>20	12.0	13.1	13.2
Sulfation	Abs./1mm	ASTM D7415*	>30	27.7	33.3	36.5



OIL ANALYSIS REPORT







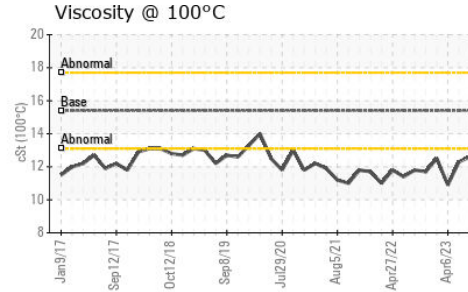
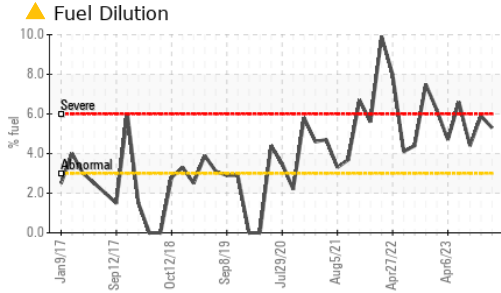


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	25.0	36.5	42.9

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG	

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	13.3	12.6

GRAPHS

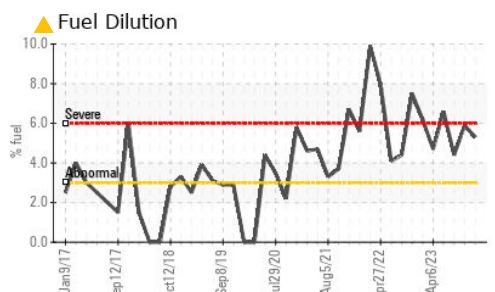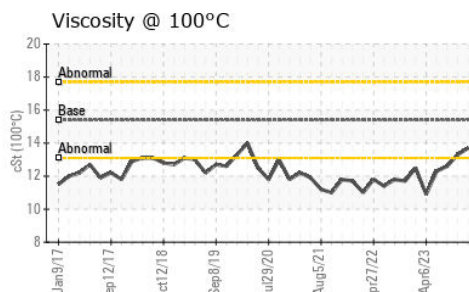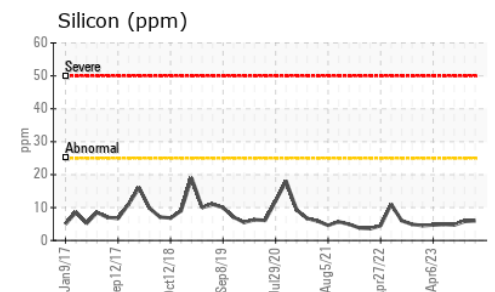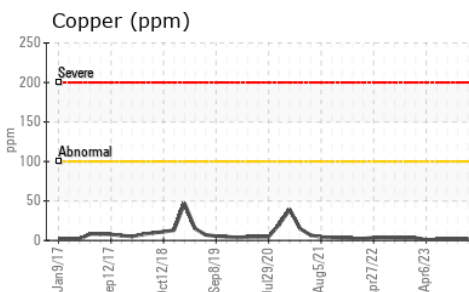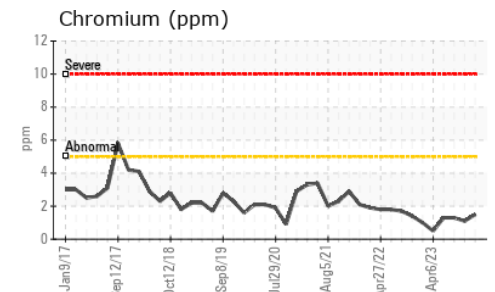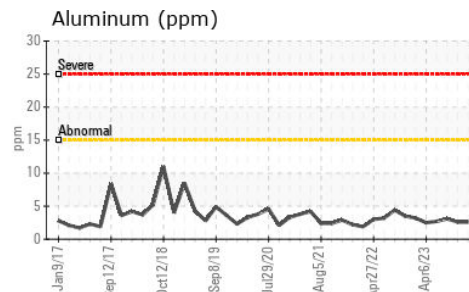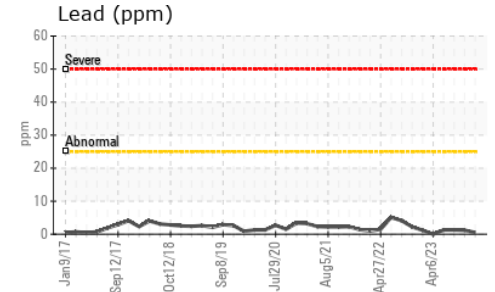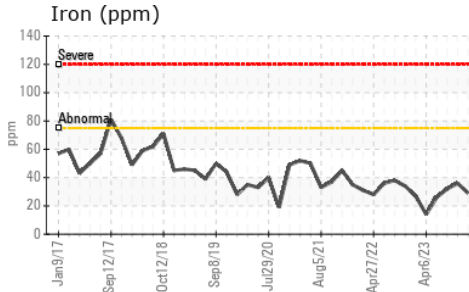

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0866488 **Received** : 27 Dec 2023
Lab Number : 02605260 **Diagnosed** : 28 Dec 2023
Unique Number : 5698345 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: PercentFuel)

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.