




OIL ANALYSIS REPORT

Sample Rating Trend

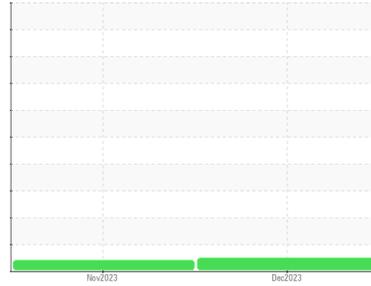

NORMAL



Machine Id
JOHN DEERE 744P LDR016

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0886096	WC0865542	---
Sample Date	Client Info		18 Dec 2023	18 Nov 2023	---
Machine Age	hrs	Client Info	2513	1873	---
Oil Age	hrs	Client Info	2513	0	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	25	25	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>7	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	1	<1	---
Lead	ppm	ASTM D5185(m)	>45	<1	1	---
Copper	ppm	ASTM D5185(m)	>225	10	10	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	6	13	13	---
Barium	ppm	ASTM D5185(m)	0	1	2	---
Molybdenum	ppm	ASTM D5185(m)	0	1	1	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	145	79	79	---
Calcium	ppm	ASTM D5185(m)	3570	2905	2900	---
Phosphorus	ppm	ASTM D5185(m)	1290	954	973	---
Zinc	ppm	ASTM D5185(m)	1640	1086	1117	---
Sulfur	ppm	ASTM D5185(m)		3073	2826	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>125	12	18	---
Sodium	ppm	ASTM D5185(m)		34	35	---
Potassium	ppm	ASTM D5185(m)	>20	2	<1	---



OIL ANALYSIS REPORT

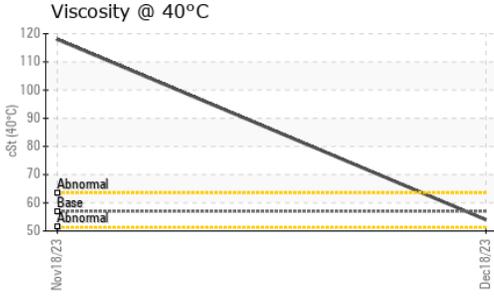


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	57.0	54.0 ▲	118

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color						no image
Bottom						no image

GRAPHS

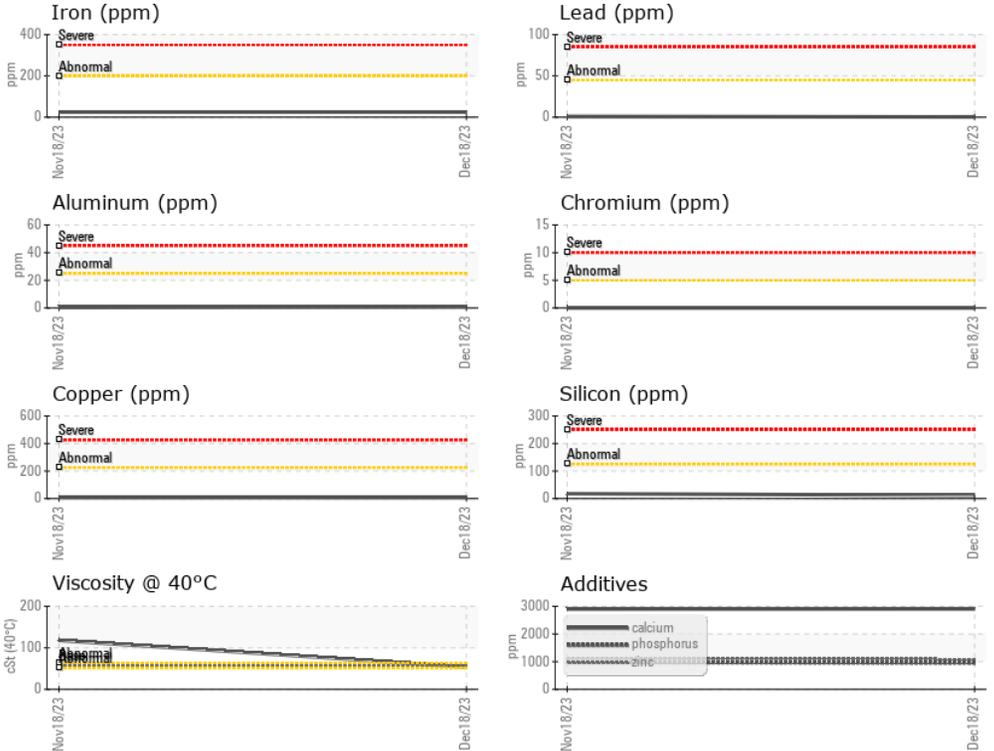

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0886096 **Received** : 27 Dec 2023
Lab Number : 02605360 **Diagnosed** : 27 Dec 2023
Unique Number : 5698445 **Diagnostician** : Wes Davis
Test Package : MOB 1

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Tony Tees
 tony.tees@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.