

### **OIL ANALYSIS REPORT**

# Sample Rating Trend **NORMAL**

## **HOG FEED DRIVE (11M107)**

11 Gearbox

GEAR OIL ISO 220 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Nov2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0855153		
Sample Date		Client Info		21 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>200	28		
Chromium	ppm	ASTM D5185(m)	>15	<1		
Nickel	ppm	ASTM D5185(m)	>15	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	<1		
Lead	ppm	ASTM D5185(m)	>100	<1		
Copper	ppm	ASTM D5185(m)	>200	<1		
Tin	ppm	ASTM D5185(m)	>25	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	10		
Barium	ppm	ASTM D5185(m)	15	3		
Molybdenum	ppm	ASTM D5185(m)	15	0		
Manganese	ppm	ASTM D5185(m)	10	<1		
Magnesium	ppm	ASTM D5185(m)	50	<1		
Calcium	ppm	ASTM D5185(m)	50	19		
Phosphorus	ppm	ASTM D5185(m)	350	267		
Zinc	ppm	ASTM D5185(m)	100	12		
Sulfur	ppm	ASTM D5185(m)		10633		
Lithium	ppm	ASTM D5185(m)	12000	<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	2		
Sodium	ppm	ASTM D5185(m)	00	2		
Potassium	ppm	ASTM D5185(m)	>20	1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	0.58		



#### **OIL ANALYSIS REPORT**

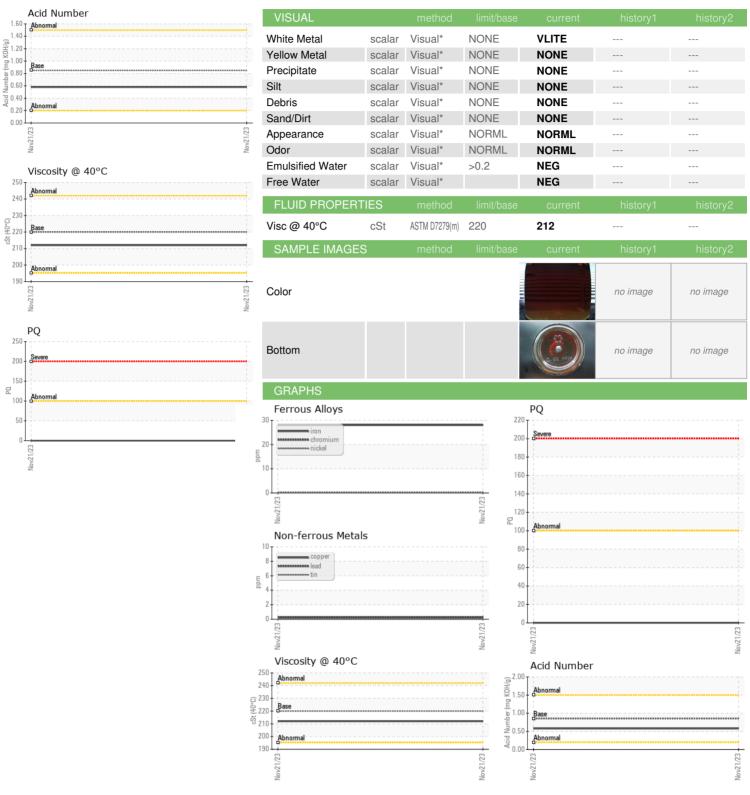



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0855153

: 02605471 : 5698556 Test Package : IND 2

: 27 Dec 2023 Recieved : 28 Dec 2023 Diagnosed

: Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Roseburg Pembroke MDF Inc.

777 Fibreboard Drive Pembroke, ON **CA K8A 6W5** Contact: Dan Havis danielh@rfpco.com T: (613)732-3939 F: (613)732-2869