



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**NO UNIT WC0892376**

Component  
**Diesel Engine**

Fluid  
**NOT GIVEN (--- GAL)**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 5W20 Diesel Engine Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within SAE 5W20 range, advise investigate. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0892376</b>	---	---
Sample Date	Client Info		<b>26 Dec 2023</b>	---	---
Machine Age	kms	Client Info	<b>0</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>52</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>16</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>19</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>88</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>68</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>602</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>1146</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>686</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>782</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>1855</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>12</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>15</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>5</b>	---	---
Fuel	%	ASTM D7593* >5	<b>0.9</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>9.2</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>17.3</b>	---	---



# OIL ANALYSIS REPORT





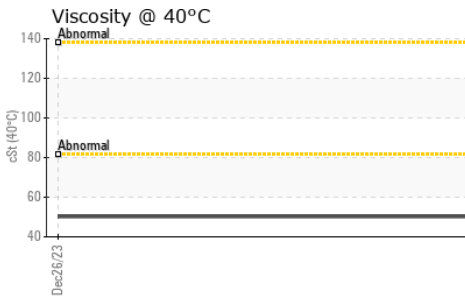
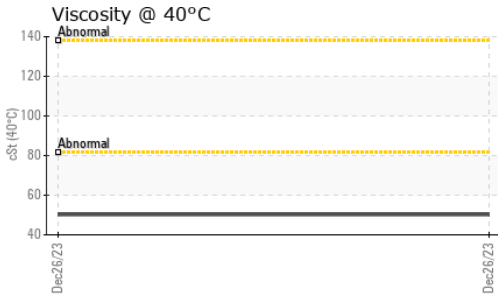
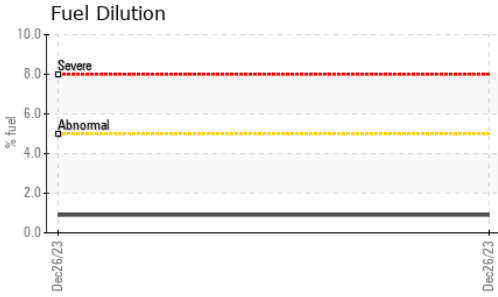


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	11.9	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	50.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	152	---	---

## GRAPHS

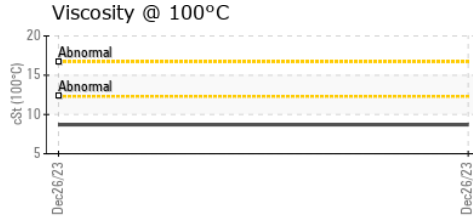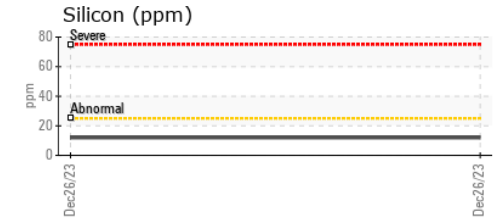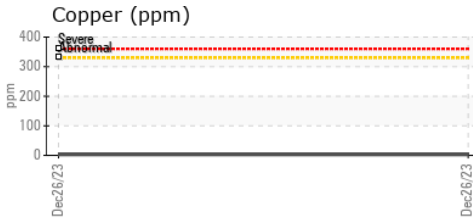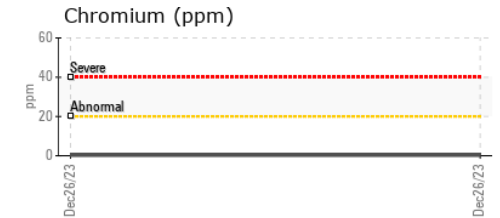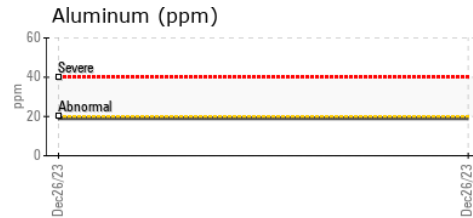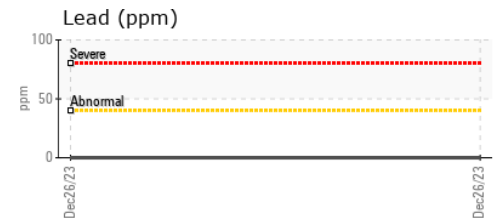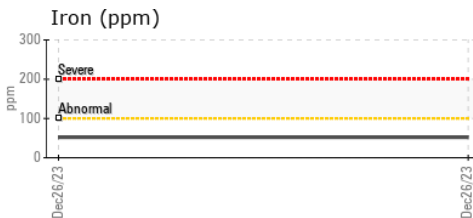

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0892376 **Received** : 02 Jan 2024  
**Lab Number** : 02605835 **Diagnosed** : 03 Jan 2024  
**Unique Number** : 5706921 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI, Visual )

**Deepak Kumar**  
 6960 Mayfield Rd.  
 Caledon, ON  
 CA L7C 0G8  
 Contact: Deepak Kumar  
 deepakkumarsts1@gmail.com  
 T: (519)562-8131  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.