



# OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id  
**Z-3301A F-33104**

Component  
**Hydraulic System**

Fluid  
**IRVING HYDRAULIC OIL LP 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within ISO 15 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PP</b>	---	---
Sample Date	Client Info	<b>14 Dec 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	<b>0</b>	---	---
Chromium	ppm ASTM D5185(m) >10	<b>0</b>	---	---
Nickel	ppm ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Lead	ppm ASTM D5185(m) >20	<b>0</b>	---	---
Copper	ppm ASTM D5185(m) >20	<b>0</b>	---	---
Tin	ppm ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>0</b>	---	---
Barium	ppm ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Calcium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Phosphorus	ppm ASTM D5185(m)	<b>▲ 1</b>	---	---
Zinc	ppm ASTM D5185(m) 400	<b>▲ 1</b>	---	---
Sulfur	ppm ASTM D5185(m)	<b>▲ 425</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS






method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<b>0</b>	---	---
Sodium	ppm ASTM D5185(m)	<b>0</b>	---	---
Potassium	ppm ASTM D5185(m) >20	<b>13</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 31193</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 9287</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>▲ 611</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>▲ 122</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>6</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 22/20/16</b>	---	---



# OIL ANALYSIS REPORT

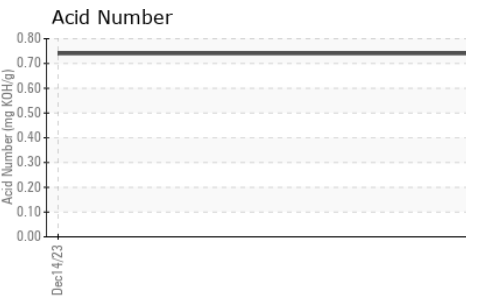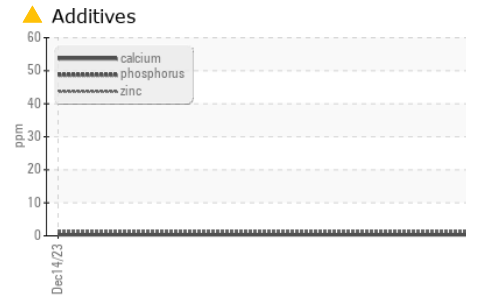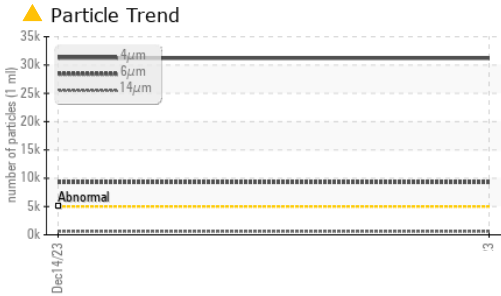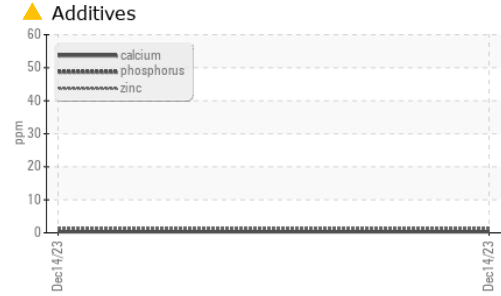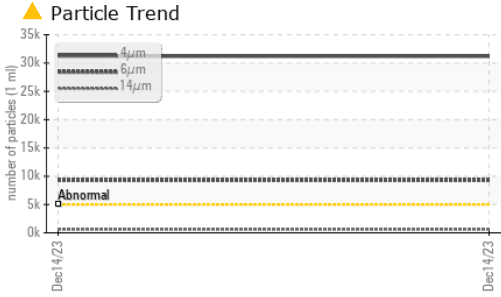

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.74</b>	---	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	<b>▲ 17.1</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

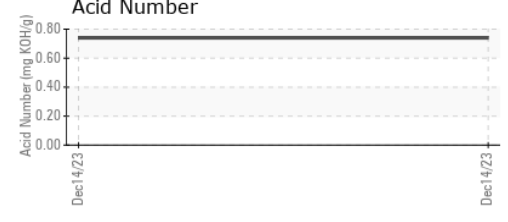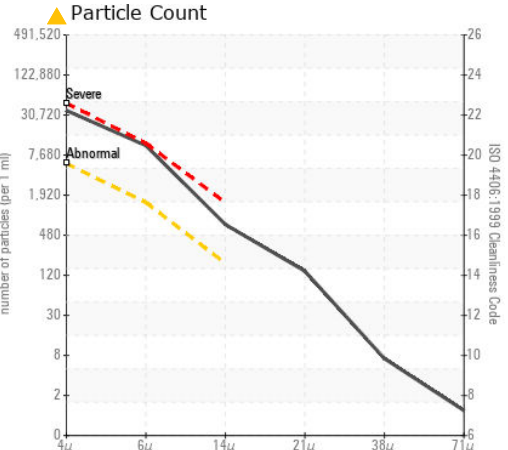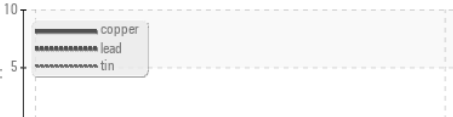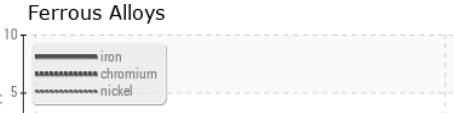

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **HIBERNIA MGMT & DEVELOPMENT CO. LTD**  
**Sample No.** : PP **Received** : 02 Jan 2024 **SUITE 1000,, 100 NEW GOWER STREET**  
**Lab Number** : **02605936** **Diagnosed** : 04 Jan 2024 **ST. JOHNS, NL**  
**Unique Number** : 5707022 **Diagnostician** : Kevin Marson **CA A1C 6K3**  
**Test Package** : MAR 2 ( Additional Tests: TAN Man ) **Contact: Sam Nash**  
*To discuss this sample report, contact Customer Service at 1-800-268-2131.* **samantha.m.nash@exxonmobil.com**  
*Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.* **T:**  
*Validity of results and interpretation are based on the sample and information as supplied.* **F: (709)722-3766**