




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**[1495085]**  
 Machine Id  
**NEW FLYER 1202**  
 Component  
**Diesel Engine**  
 Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)**

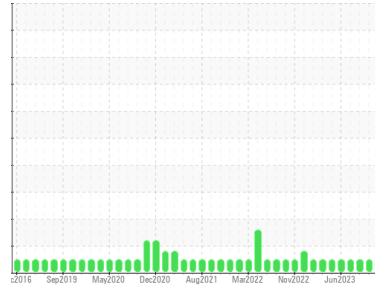

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0891135</b>	WC0877907	WC0849780
Sample Date	Client Info		<b>28 Dec 2023</b>	03 Nov 2023	26 Sep 2023
Machine Age	kms	Client Info	<b>824622</b>	814688	806249
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>13</b>	13	17
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	1	1
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	2	3
Copper	ppm	ASTM D5185(m)	>100	<b>1</b>	1	2
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>59</b>	58	61
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>955</b>	942	965
Calcium	ppm	ASTM D5185(m)		<b>1021</b>	1023	1042
Phosphorus	ppm	ASTM D5185(m)		<b>1001</b>	945	984
Zinc	ppm	ASTM D5185(m)		<b>1178</b>	1173	1197
Sulfur	ppm	ASTM D5185(m)		<b>2656</b>	2384	2400
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.7</b>	0.8	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.8</b>	8.7	8.8
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.7</b>	21.4	21.4



# OIL ANALYSIS REPORT

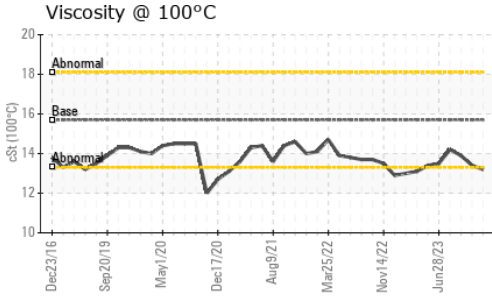

FLUID DEGRADATION		method	limit/base	current	history1	history2
-------------------	--	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.8</b>	17.8	17.4
-----------	----------	-------------	-----	-------------	------	------

VISUAL		method	limit/base	current	history1	history2
--------	--	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
------------------	--------	---------	------	------------	-----	-----

Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	15.7	<b>13.2</b>	13.4	13.9
--------------	-----	---------------	------	-------------	------	------

## GRAPHS

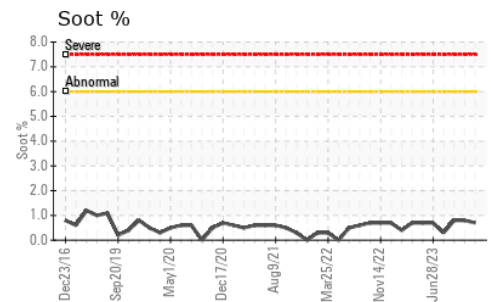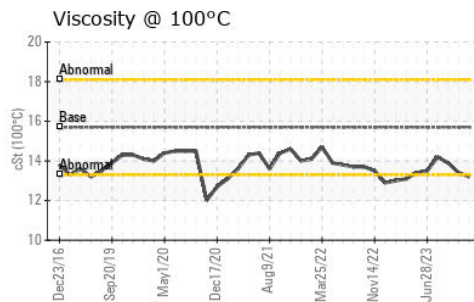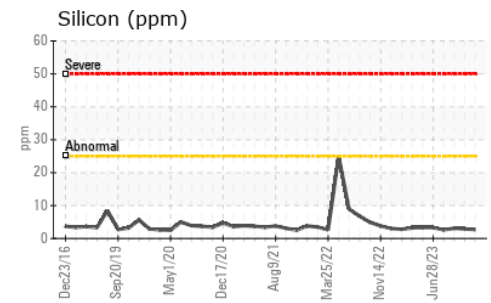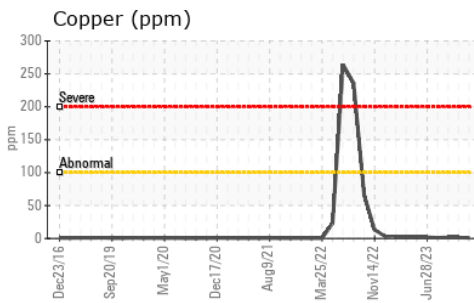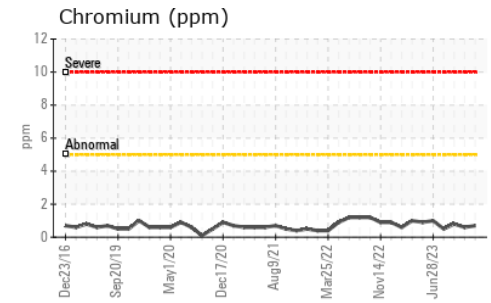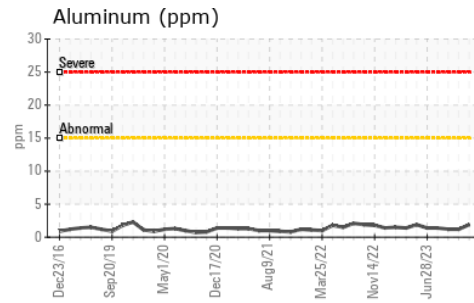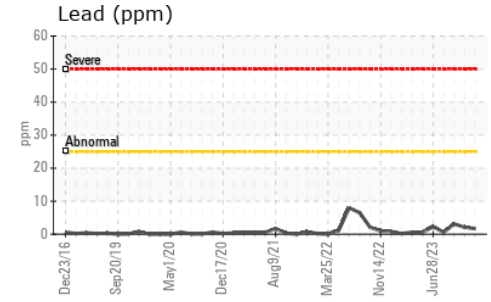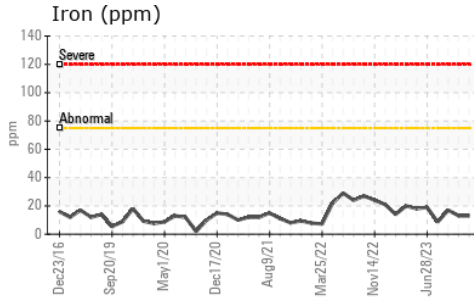

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891135 **Received** : 03 Jan 2024  
**Lab Number** : 02606201 **Diagnosed** : 03 Jan 2024  
**Unique Number** : 5707287 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.