




COOLANT REPORT

Sample Rating Trend

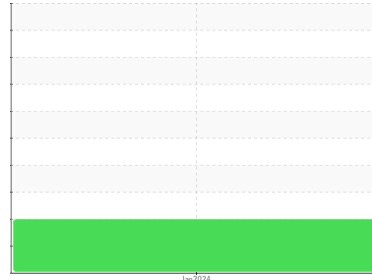

PH



Machine Id
MERCEDES C5-A

Component
Coolant
Fluid
CONVENTIONAL COOLANT (--- GAL)

DIAGNOSIS

Recommendation

We recommend drain system, and refill with 50/50 antifreeze water mixture. We advise that you replenish the supplemental coolant additives (SCAs) and add per manufacturer's specifications. We recommend an early resample to monitor this condition.

Corrosion

Copper ppm levels are abnormal. The high metal levels indicate corrosion in the system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

The nitrite level is acceptable. The pH is low which causes rust formation. The reserve alkalinity of this fluid is acceptable.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0891335	---	---
Sample Date	Client Info			03 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				ABNORMAL	---	---

PHYSICAL TEST RESULTS		method	limit/base	current	history1	history2
Specific Gravity	ASTM D1298*			1.070	---	---
pH	Scale 0-14	ASTM D1287*	9.5	▲ 7.23	---	---
Nitrites	ppm	Alcan Test Kit*	1500	1120	---	---
Reserve Alkalinity	Scale 0-20	ASTM D1121*	8.5	7.1	---	---
Percentage Glycol	%	ASTM D3321*	50	52.0	---	---
Freezing Point	°C	ASTM D3321*	-40	-40	---	---
Carboxylate				---	---	---

CORROSION INHIBITORS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		45	---	---
Phosphorus	ppm	ASTM D5185(m)		14	---	---
Boron	ppm	ASTM D5185(m)		1576	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---

CORROSION		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>15	0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	1	---	---
Copper	ppm	ASTM D5185(m)	>10	▲ 33	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Silver	ppm	ASTM D5185(m)	>10	<1	---	---
Zinc	ppm	ASTM D5185(m)		2	---	---

CARRIER SALTS		method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)		9644	---	---
Potassium	ppm	ASTM D5185(m)		556	---	---









SCALE POTENTIAL		method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)	>100	10	---	---
Magnesium	ppm	ASTM D5185(m)	>40	2	---	---
Hardness	mg/L CaCO3	In-house*	<75	31	---	---

VISUAL		method	limit/base	current	history1	history2
Coolant Color	Visual*	Green		Green	---	---
Coolant Appearance	Visual*	Clear		Clear	---	---

Color			no image	no image
Bottom			no image	no image



COOLANT REPORT

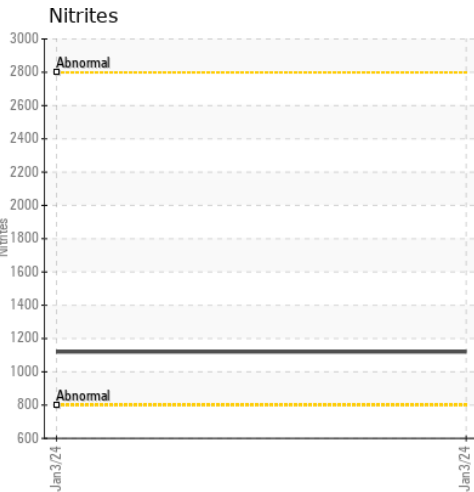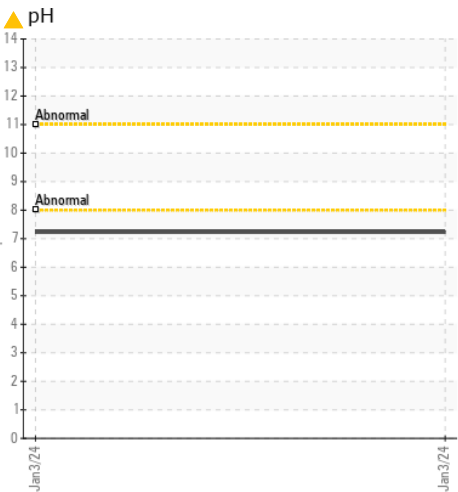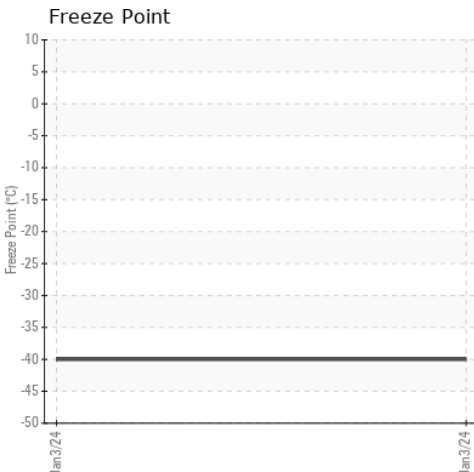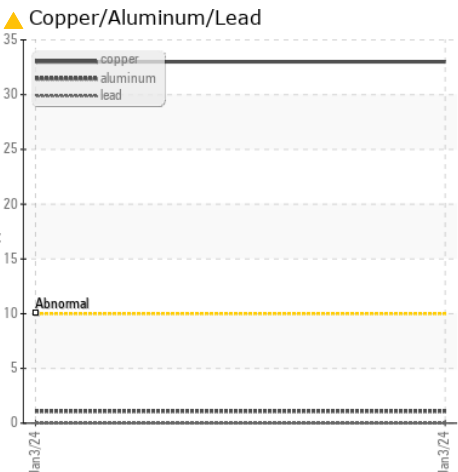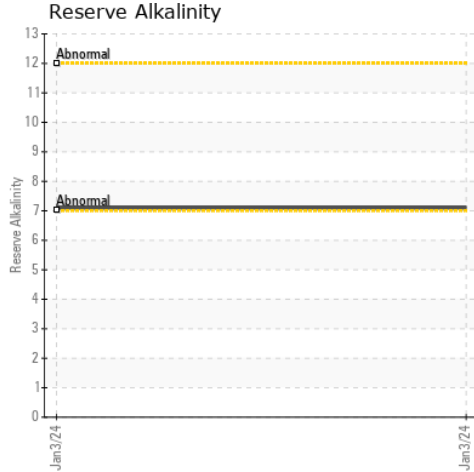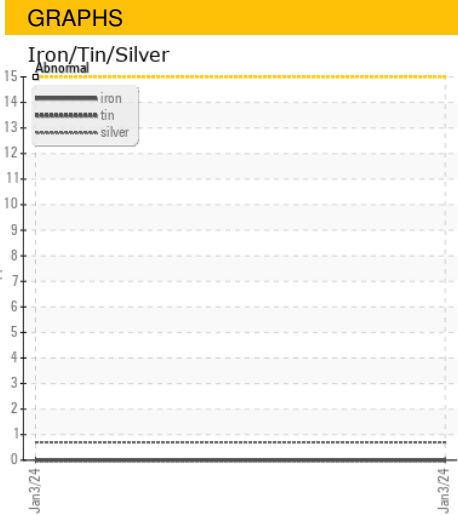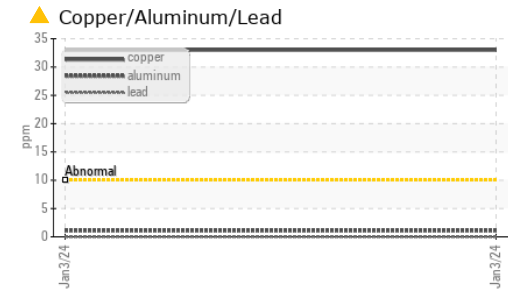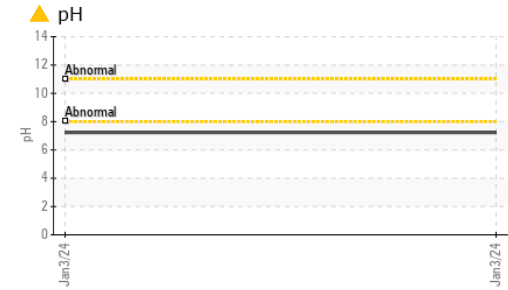

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0891335 **Received** : 04 Jan 2024
Lab Number : 02606640 **Diagnosed** : 08 Jan 2024
Unique Number : 5707726 **Diagnostician** : Kevin Marson
Test Package : COOL

TransitNext M&R Inc
 3110 Albion Road North
 Ottawa, ON
 CA K1V 9V9
 Contact: Glenn Skilton
 Glenn.Skilton@atkinsrealis.com
 T: (613)907-7100
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.