




# OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Area  
**[1495089]**  
 Machine Id  
**NEW FLYER 1222**  
 Component  
**Diesel Engine**  
 Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)**

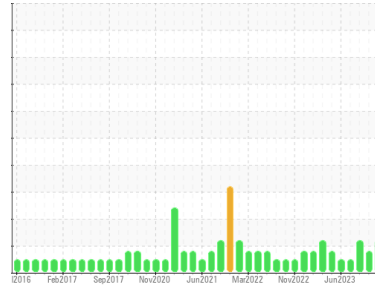

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0891130</b>	WC0878080	WC0849929
Sample Date	Client Info		<b>04 Jan 2024</b>	07 Nov 2023	28 Sep 2023
Machine Age	kms	Client Info	<b>829010</b>	0	809811
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>18</b>	17	18
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>3</b>	3	2
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>100	<b>1</b>	1	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>57</b>	58	60
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>930</b>	956	973
Calcium	ppm	ASTM D5185(m)		<b>1020</b>	1036	1055
Phosphorus	ppm	ASTM D5185(m)		<b>950</b>	994	964
Zinc	ppm	ASTM D5185(m)		<b>1145</b>	1173	1194
Sulfur	ppm	ASTM D5185(m)		<b>2506</b>	2353	2376
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Fuel	%	ASTM D7593*	>3.0	<b>▲ 4.6</b>	▲ 3.3	▲ 3.3

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.7</b>	0.7	0.6
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.7</b>	10.2	10.0
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>22.5</b>	23.0	22.9



# OIL ANALYSIS REPORT







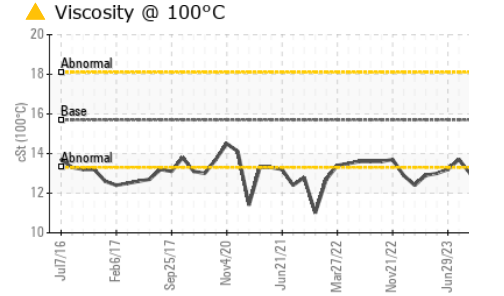
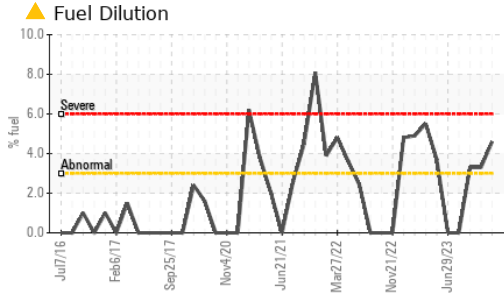


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>20.6</b>	20.9	21.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	<b>▲ 13.0</b>	13.4	<b>▲ 13.0</b>

## GRAPHS

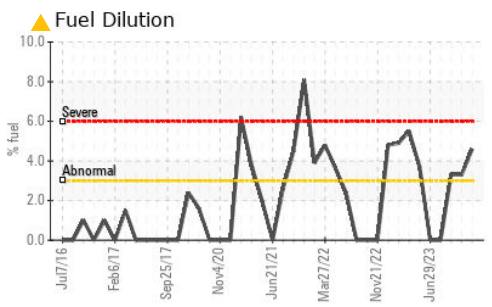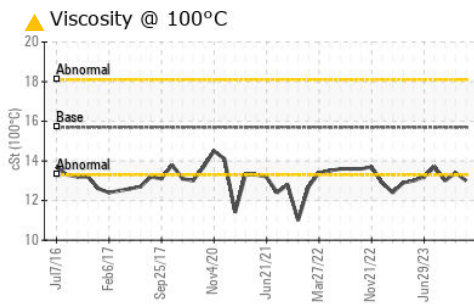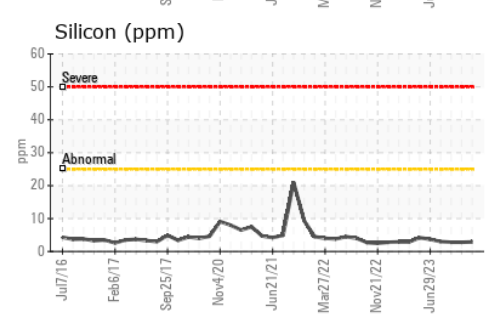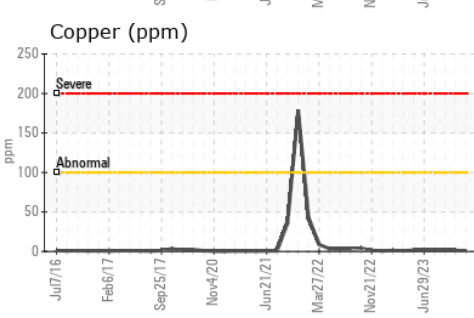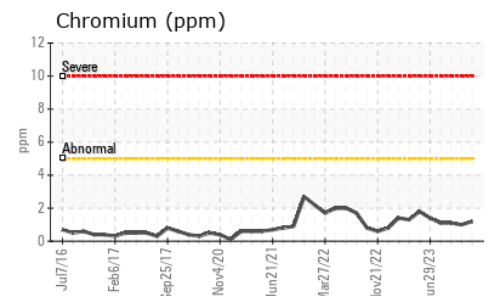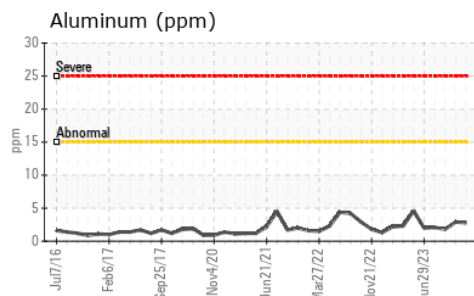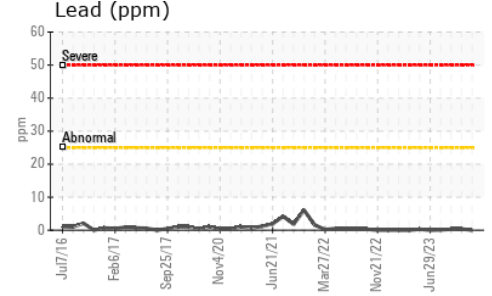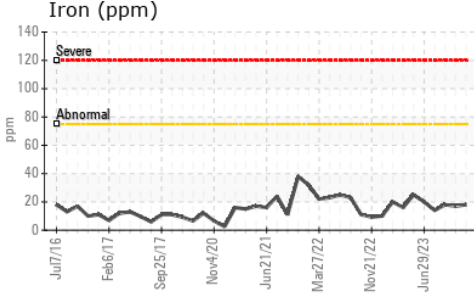

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891130 **Received** : 05 Jan 2024  
**Lab Number** : 02606737 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 5707823 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.