




OIL ANALYSIS REPORT

Sample Rating Trend

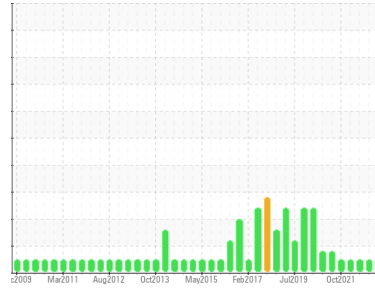

NORMAL



Machine Id
NOVA 60050
 Component
Rear Diesel Engine
 Fluid
VALVOLINE 15W40 (24 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0887262	WC0809102	WC0809135
Sample Date	Client Info			27 Dec 2023	21 Jun 2023	15 May 2023
Machine Age	kms	Client Info		899806	0	877131
Oil Age	kms	Client Info		10000	10000	10000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	37	16	41
Chromium	ppm	ASTM D5185(m)	>5	2	<1	2
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	5	2	9
Lead	ppm	ASTM D5185(m)	>25	2	<1	1
Copper	ppm	ASTM D5185(m)	>100	3	3	3
Tin	ppm	ASTM D5185(m)	>4	<1	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	39	3	2	2
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	49	65	58	64
Manganese	ppm	ASTM D5185(m)	1	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	616	1025	948	1015
Calcium	ppm	ASTM D5185(m)	1554	1140	1071	1134
Phosphorus	ppm	ASTM D5185(m)	899	1013	1026	1108
Zinc	ppm	ASTM D5185(m)	1069	1241	1184	1232
Sulfur	ppm	ASTM D5185(m)	2624	2644	2479	2538
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	6	4	6
Sodium	ppm	ASTM D5185(m)		8	5	9
Potassium	ppm	ASTM D5185(m)	>20	5	<1	<1
Glycol	%	ASTM D7922*		0.0	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	1.1	0.3	1.7
Nitration	Abs/cm	ASTM D7624*	>20	12.4	8.1	12.4
Sulfation	Abs.1mm	ASTM D7415*	>30	24.6	20.0	25.7



OIL ANALYSIS REPORT










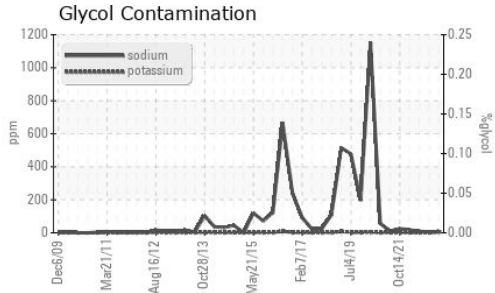


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	21.9	16.7	22.4

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	13.9	14.1	13.0

GRAPHS

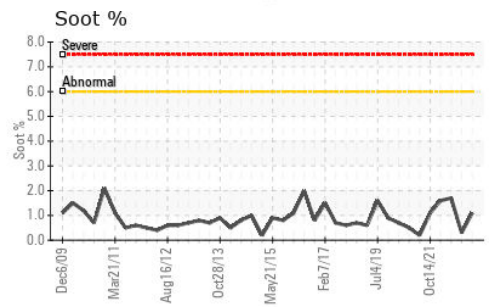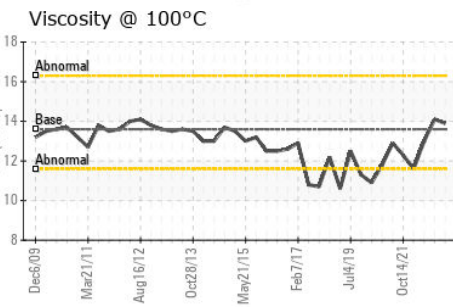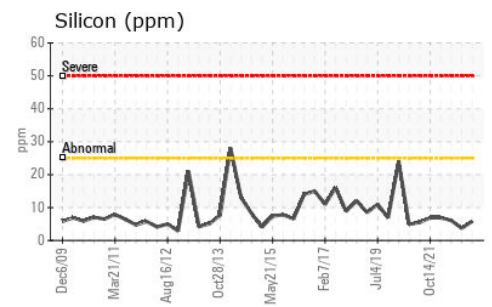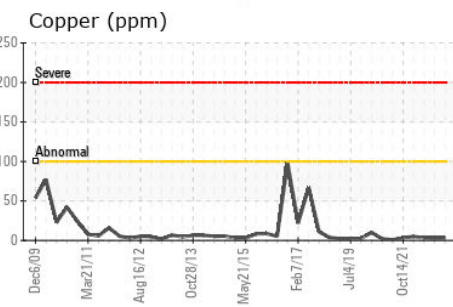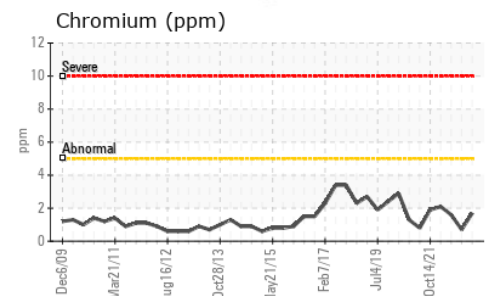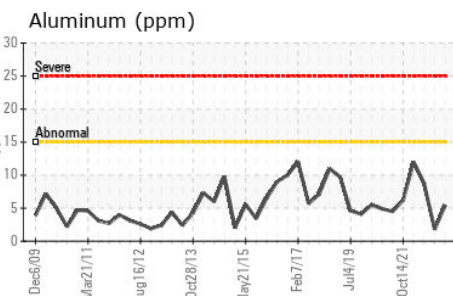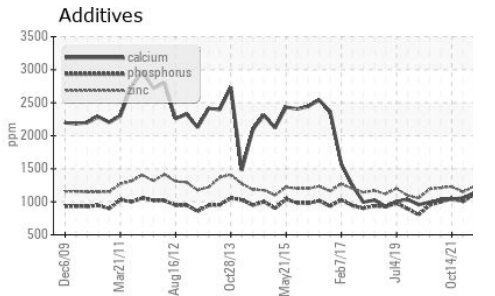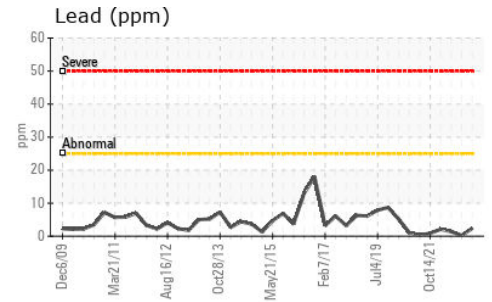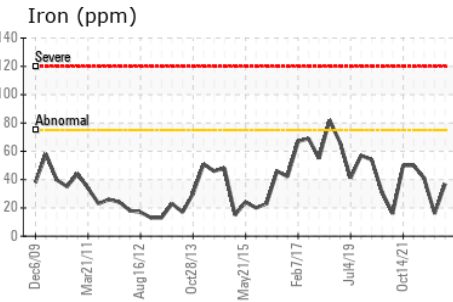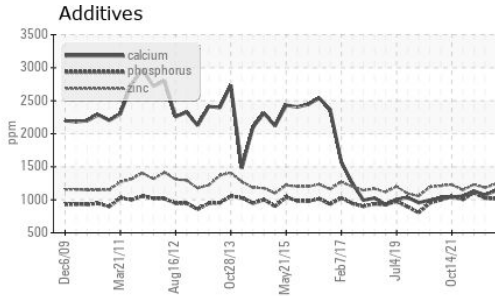

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0887262
Lab Number : 02606760
Unique Number : 5707846
Test Package : MOB 1 (Additional Tests: Glycol)

CITY OF PETERBOROUGH
 791 WEBBER AVENUE., MUNICIPAL OPERATIONS CENTRE
 PETERBOROUGH, ON
 CA K9J 8N3
 Contact: Frank Curran
 fcurran@peterborough.ca
 T: (705)742-7777
 F: (705)743-3223

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.