

## **OIL ANALYSIS REPORT**

## IAC-Maple - L01500 A2401025

Component **Hydraulic System** 

{not provided} (--- GAL)

# Sample Rating Trend ISO

#### **DIAGNOSIS**

#### Recommendation

This is a baseline read-out on the submitted sample.

#### Wear

Copper ppm levels are noted.

#### Contamination

Particles >4µm and oil cleanliness are notably high. The sample submitted is 4 times dirtier than the ISO dirt count recommendation of 19/16/14.

#### **Fluid Condition**

{not applicable}

|                  |        |                  |            | Jan 2024    |          |          |
|------------------|--------|------------------|------------|-------------|----------|----------|
| SAMPLE INFORM    | MATION | method           | limit/base | current     | history1 | history2 |
| Machine ID       |        | Client Info      |            | Woodstock   |          |          |
| Department       |        | Client Info      |            | Production  |          |          |
| Sample From      |        | Client Info      |            | Machine     |          |          |
| Production Stage |        | Client Info      |            | Initial     |          |          |
| Sent to WC       |        | Client Info      |            | 01/03/2024  |          |          |
| Sample Number    |        | Client Info      |            | E30001101   |          |          |
| Sample Date      |        | Client Info      |            | 03 Jan 2024 |          |          |
| Machine Age      | hrs    | Client Info      |            | 0           |          |          |
| Oil Age          | hrs    | Client Info      |            | 0           |          |          |
| Oil Changed      |        | Client Info      |            | N/A         |          |          |
| Sample Status    |        |                  |            | ABNORMAL    |          |          |
| WEAR METALS      |        | method           | limit/base | current     | history1 | history2 |
| ron              | ppm    | ASTM D5185(m)    | >20        | 5           |          |          |
| Chromium         | ppm    | ASTM D5185(m)    | >20        | 2           |          |          |
| Nickel           | ppm    | ASTM D5185(m)    | >20        | 0           |          |          |
| Titanium         | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Silver           | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Aluminum         | ppm    | ASTM D5185(m)    | >20        | <1          |          |          |
| Lead             | ppm    | ASTM D5185(m)    | >20        | 1           |          |          |
| Copper           | ppm    | ASTM D5185(m)    | >20        | 24          |          |          |
| Tin              | ppm    | ASTM D5185(m)    | >20        | <1          |          |          |
| Antimony         | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Vanadium         | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Beryllium        | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Cadmium          | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| ADDITIVES        |        | method           | limit/base | current     | history1 | history2 |
| Boron            | ppm    | ASTM D5185(m)    |            | <1          |          |          |
| Barium           | ppm    | ASTM D5185(m)    |            | 1           |          |          |
| Molybdenum       | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Manganese        | ppm    | ASTM D5185(m)    |            | 0           |          |          |
| Magnesium        | ppm    | ASTM D5185(m)    |            | 5           |          |          |
| Calcium          | ppm    | ASTM D5185(m)    |            | 63          |          |          |
| Phosphorus       | ppm    | ASTM D5185(m)    |            | 344         |          |          |
| Zinc             | ppm    | ASTM D5185(m)    |            | 380         |          |          |
| Sulfur           | ppm    | ASTM D5185(m)    |            | 1351        |          |          |
| Lithium          | ppm    | ASTM D5185(m)    |            | <1          |          |          |
| CONTAMINANTS     |        | method           | limit/base | current     | history1 | history2 |
| Silicon          | ppm    | ASTM D5185(m)    | >15        | 1           |          |          |
| Sodium           | ppm    | ASTM D5185(m)    |            | <1          |          |          |
| Potassium        | ppm    | ASTM D5185(m)    | >20        | 0           |          |          |
| Water            | %      | ASTM D6304*      | >0.05      | 0.003       |          |          |
| \A/-1            |        | A OTA 4 D 000 4* | F00        | 00          |          |          |

ASTM D6304\* >500


ppm

39

ppm Water



### OIL ANALYSIS REPORT

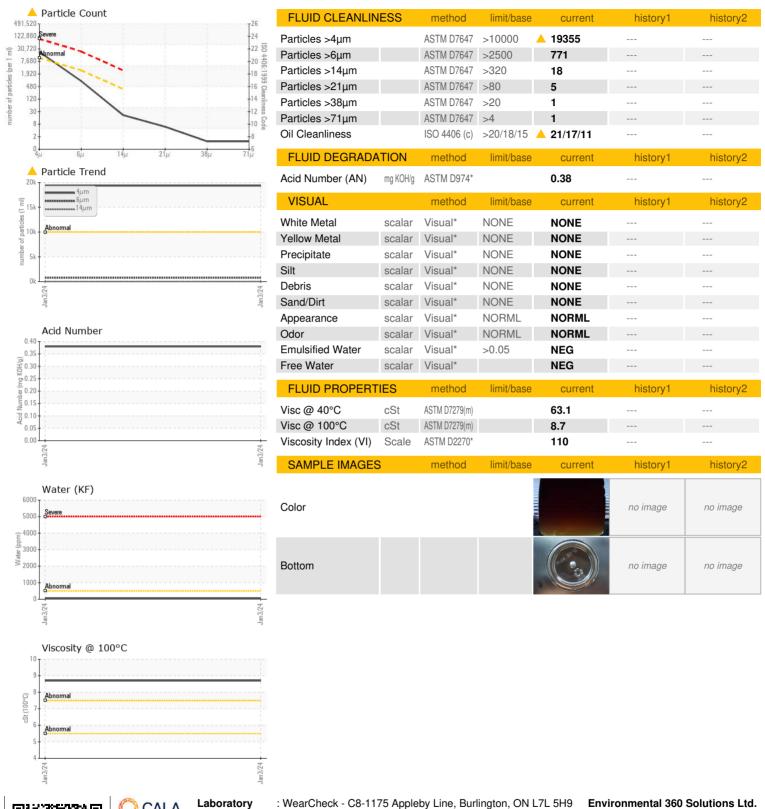



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

: E30001101

: 02606789 : 5707875

Recieved Diagnosed

: 25 Jan 2024 Diagnostician : Tatiana Sorkina Test Package : IND 2 ( Additional Tests: KF, KV100, TAN MAN, VI )

: 05 Jan 2024

To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd. 640 Victoria Street

Cobourg, ON **CA K9A 5H5** Contact: Tatiana Sorkina tsorkina@e360s.ca

T: (800)263-3939 F: (905)373-4950