



# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**LES ENTREPRISES DENEXCO [02606861]**  
 Machine Id  
**CASE CX17C HHKHEJ26CE0003627**  
 Component  
**Hydraulic System**  
 Fluid  
**PANOLIN HLP SYNTH 46 (13 LTR)**



## DIAGNOSIS

### Recommendation

Nous recommandons le remplacement des filtres de ce composant. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il y a une légère quantité de limon (particules de 4 à 14 microns) dans l'huile. Il y a une faible concentration (<5.0%) d'huile minérale présente dans le fluide. La teneur en eau est négligeable.

### Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC</b>	---	---
Sample Date	Client Info		<b>03 Jan 2024</b>	---	---
Machine Age	hrs	Client Info	<b>7</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>65	<b>0</b>	---
Chromium	ppm	ASTM D5185(m)	>6	<b>0</b>	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---
Aluminum	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185(m)	>45	<b>0</b>	---
Copper	ppm	ASTM D5185(m)	>120	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>0</b>	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	---
Magnesium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---
Calcium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---
Phosphorus	ppm	ASTM D5185(m)	1700	<b>1615</b>	---
Zinc	ppm	ASTM D5185(m)	0	<b>4</b>	---
Sulfur	ppm	ASTM D5185(m)	1350	<b>1442</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	---
Sodium	ppm	ASTM D5185(m)		<b>1</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---
Water	%	ASTM D6304*	>0.05	<b>0.020</b>	---
ppm Water	ppm	ASTM D6304*	>500	<b>202</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	---
Nitration	Abs/cm	ASTM D7624*		<b>4.1</b>	---
Sulfation	Abs/.1mm	ASTM D7415*		<b>158.8</b>	---
Mineral Oil Content	%	ASTM D7418*	<5.0%	<b>&lt;5.0</b>	---



# OIL ANALYSIS REPORT

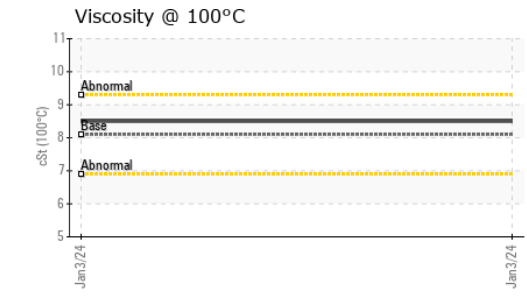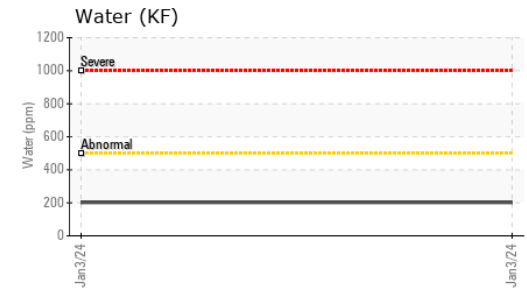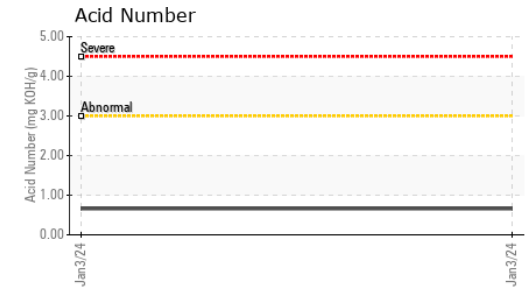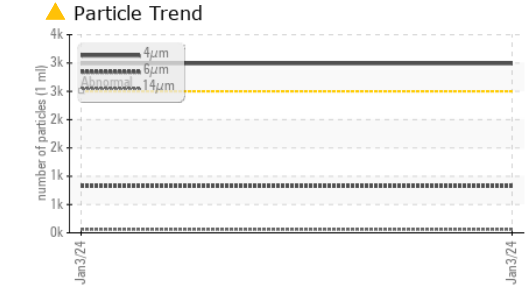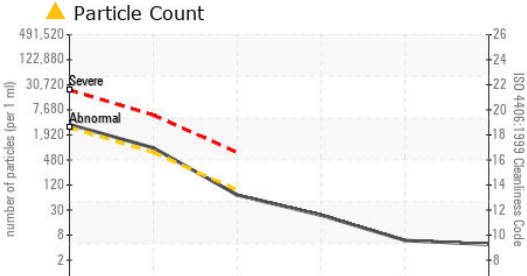

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 2991	---	---
Particles >6µm	ASTM D7647	>640	▲ 824	---	---
Particles >14µm	ASTM D7647	>80	61	---	---
Particles >21µm	ASTM D7647	>20	20	---	---
Particles >38µm	ASTM D7647	>4	5	---	---
Particles >71µm	ASTM D7647	>3	4	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 19/17/13	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	153.0	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.66	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	47.0	46.9	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.1	8.5	---
Viscosity Index (VI)	Scale	ASTM D2270*	146	159	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02606862  
**Unique Number** : 5707948  
**Test Package** : MOB 2 ( Additional Tests: TAN Man )

**Envirolin Canada**  
 520 rue Adanac  
 Quebec, QC  
 CA G1C 7B7  
 Contact: Patrick Levesque  
 patrick.levesque@envirolin.com  
 T: (418)623-1216  
 F: (418)660-8889

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.



# MINERAL OIL CONTENT REPORT

PASS




Area  
**LES ENTREPRISES DENEXCO [02606861]**  
 Machine Id  
**CASE CX17C HHKHEJ26CE0003627**  
 Component  
**Hydraulic System**  
 Fluid  
**PANOLIN HLP SYNTH 46 (13 LTR)**


## SPECTRAL ANALYSIS

		method	limit/base	current	history1	history2
Zinc	ppm	ASTM D5185(m)	0	<b>4</b>	---	---
Mineral Oil Content	%	ASTM D7418*	<5.0%	<b>&lt;5.0</b>	---	---


### FT-IR - Esters I

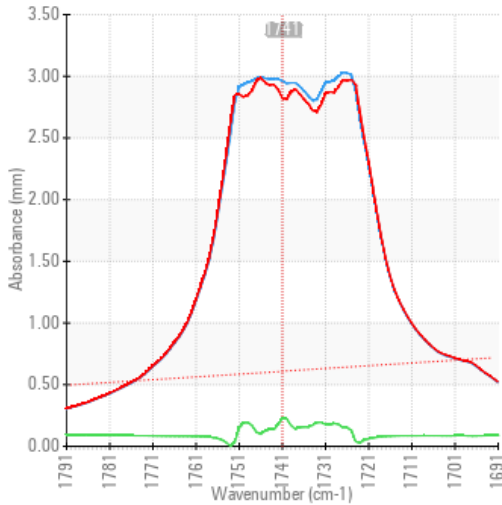

### FT-IR - Esters II

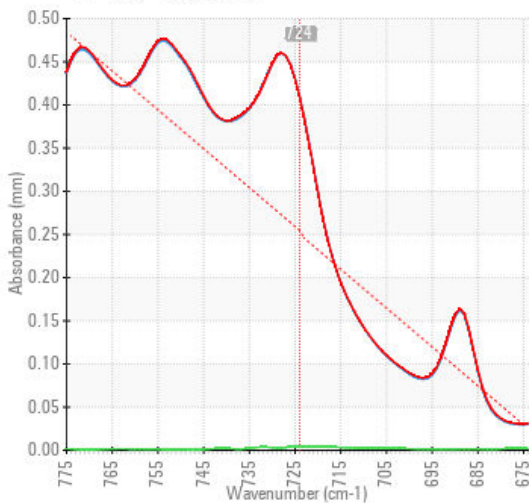

### FT-IR Spectrum (Absorbance)

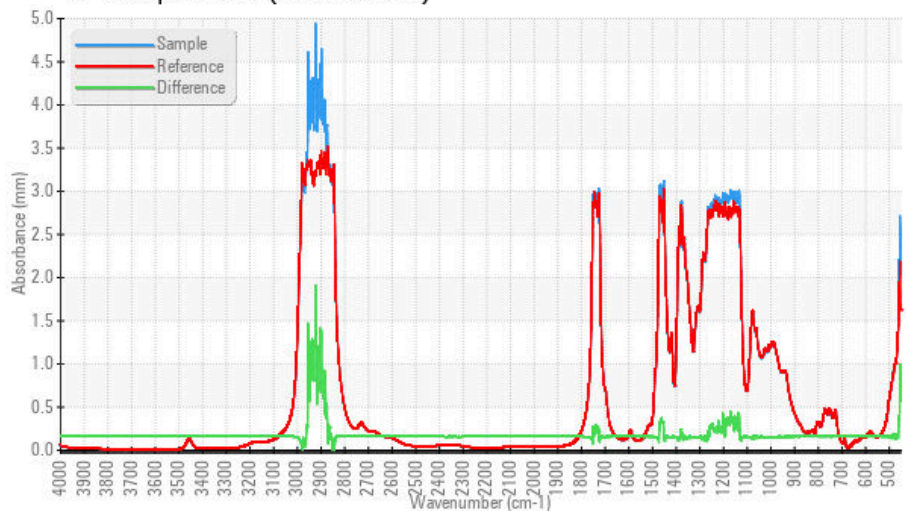

ISO 17025:2017  
 Accredited  
 Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02606862  
**Unique Number** : 5707948  
**Test Package** : MOB 2 ( Additional Tests: TAN Man )

**Recieved** : 05 Jan 2024  
**Diagnosed** : 09 Jan 2024  
**Diagnostician** : Bill Quesnel

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

### EnviroLin Canada

520 rue Adanac  
 Quebec, QC  
 CA G1C 7B7  
 Contact: Patrick Levesque  
 patrick.levesque@envirolin.com  
 T: (418)623-1216  
 F: (418)660-8889

*This page left intentionally blank*