




OIL ANALYSIS REPORT

Sample Rating Trend

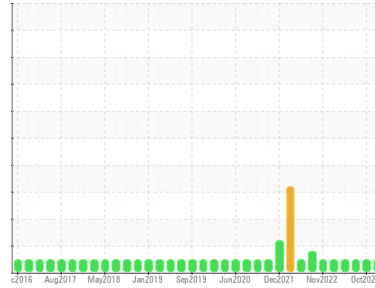

NORMAL



Area
[6094]
 Machine Id
NOVA 1601
 Component
Rear Diesel Engine
 Fluid
VALVOLINE 15W40 (26 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0875069	WC0858034	WC0805046
Sample Date	Client Info			22 Dec 2023	23 Oct 2023	06 Jul 2023
Machine Age	kms	Client Info		525367	513102	504239
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	14	10	9
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	1	2	1
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	2	2	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	39	14	35	17
Barium	ppm	ASTM D5185(m)	1	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	49	12	29	16
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	616	59	50	31
Calcium	ppm	ASTM D5185(m)	1554	2208	2171	2301
Phosphorus	ppm	ASTM D5185(m)	899	858	895	967
Zinc	ppm	ASTM D5185(m)	1069	1019	1062	1085
Sulfur	ppm	ASTM D5185(m)	2624	3071	2943	3046
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Sodium	ppm	ASTM D5185(m)		1	2	2
Potassium	ppm	ASTM D5185(m)	>20	1	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.3	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.4	9.6	9.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.4	22.6	21.7



OIL ANALYSIS REPORT







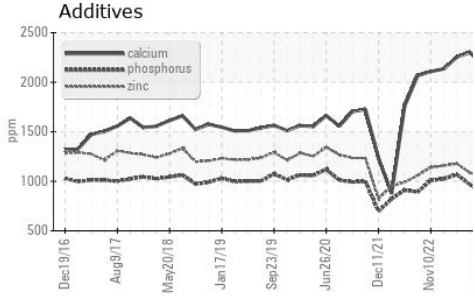
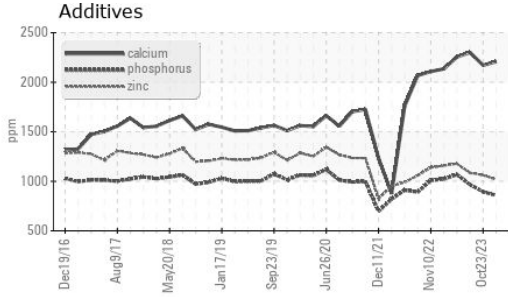


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.7	19.0	16.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	12.5	12.7	13.3

GRAPHS

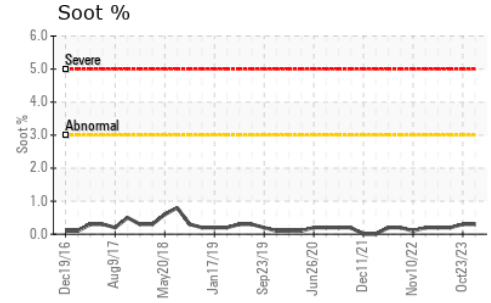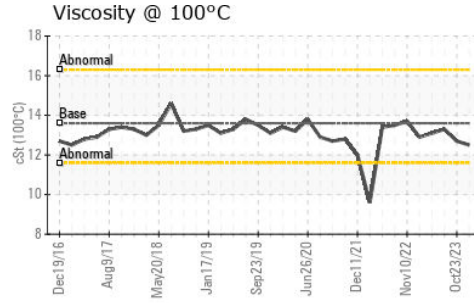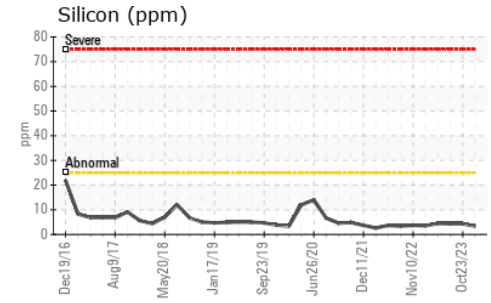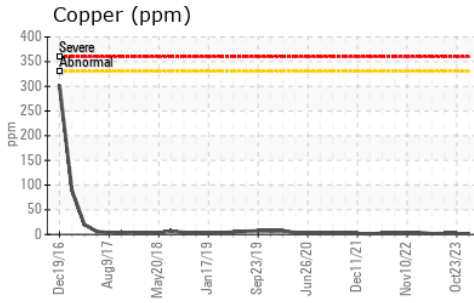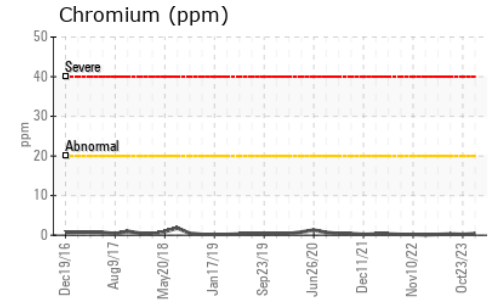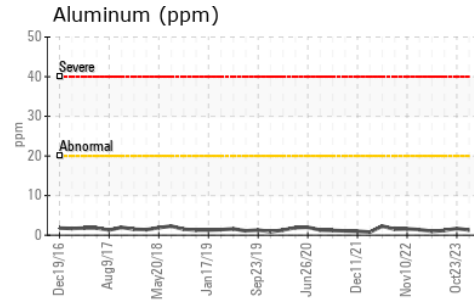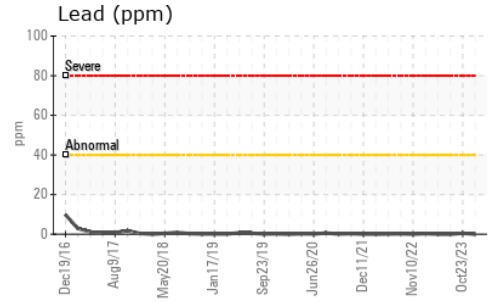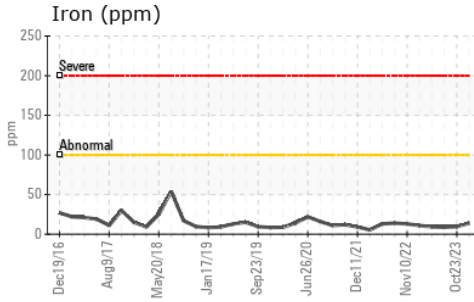

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0875069 **Received** : 08 Jan 2024
Lab Number : **02606924** **Diagnosed** : 08 Jan 2024
Unique Number : 5708010 **Diagnostician** : Wes Davis
Test Package : MOB 1

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3
 Contact: Frank Mastromarco
 frank.mastromarco@mvttransit.com
 T: (709)792-5033
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.