




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[6105]
 Machine Id
NEW FLYER 1403-312
 Component
Rear Diesel Engine
 Fluid
VALVOLINE 15W40 (26 LTR)

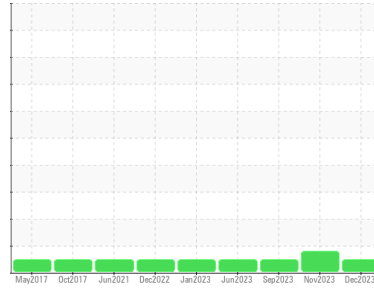

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0875071 | WC0858009 | WC0843563 |
| Sample Date | Client Info | | 27 Dec 2023 | 13 Nov 2023 | 27 Sep 2023 |
| Machine Age | kms | Client Info | 503612 | 494876 | 485665 |
| Oil Age | kms | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Changed | N/A | Changed |
| Sample Status | | | NORMAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >75 | 14 | 17 | 13 |
| Chromium | ppm | ASTM D5185(m) | >5 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >4 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) | >15 | 2 | 1 | 2 |
| Lead | ppm | ASTM D5185(m) | >25 | <1 | 5 | 1 |
| Copper | ppm | ASTM D5185(m) | >100 | 36 | ▲ 193 | 22 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 39 | 10 | 9 | 9 |
| Barium | ppm | ASTM D5185(m) | 1 | 0 | 1 | 8 |
| Molybdenum | ppm | ASTM D5185(m) | 49 | 9 | 13 | 49 |
| Manganese | ppm | ASTM D5185(m) | 1 | 0 | 0 | 2 |
| Magnesium | ppm | ASTM D5185(m) | 616 | 61 | 116 | 809 |
| Calcium | ppm | ASTM D5185(m) | 1554 | 2195 | 2152 | 1470 |
| Phosphorus | ppm | ASTM D5185(m) | 899 | 850 | 861 | 982 |
| Zinc | ppm | ASTM D5185(m) | 1069 | 1012 | 1016 | 1177 |
| Sulfur | ppm | ASTM D5185(m) | 2624 | 2926 | 2636 | 2631 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Silicon | ppm | ASTM D5185(m) | >25 | 4 | 7 | 23 |
| Sodium | ppm | ASTM D5185(m) | | 1 | 2 | 3 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | 2 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >6 | 0.2 | 0.1 | 0 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 7.6 | 7.6 | 6.0 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 19.4 | 19.3 | 19.1 |



OIL ANALYSIS REPORT

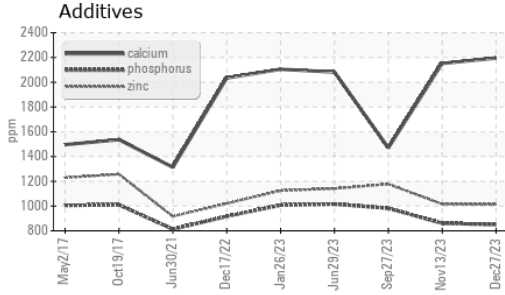

| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------|--------|------------|---------|----------|----------|
|-------------------|--------|------------|---------|----------|----------|

| | | | | | | |
|-----------|----------|-------------|-----|-------------|------|------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 12.4 | 12.7 | 14.3 |
|-----------|----------|-------------|-----|-------------|------|------|

| VISUAL | method | limit/base | current | history1 | history2 |
|--------|--------|------------|---------|----------|----------|
|--------|--------|------------|---------|----------|----------|










| | | | | | | |
|------------------|--------|---------|------|------------|-----|-----|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
|------------------|--------|---------|------|------------|-----|-----|

| | | | | | | |
|------------|--------|---------|--|------------|-----|-----|
| Free Water | scalar | Visual* | | NEG | NEG | NEG |
|------------|--------|---------|--|------------|-----|-----|

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
|------------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------------|-----|---------------|------|-------------|------|------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 13.6 | 13.1 | 13.5 | 13.8 |
|--------------|-----|---------------|------|-------------|------|------|

GRAPHS

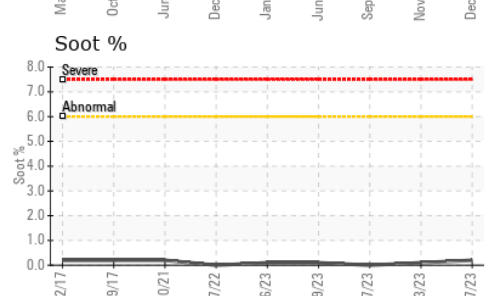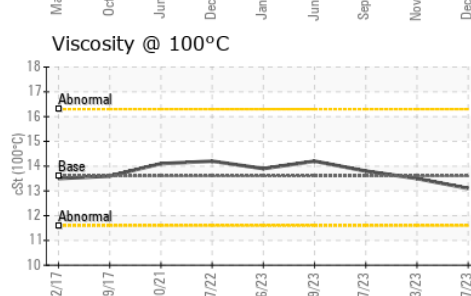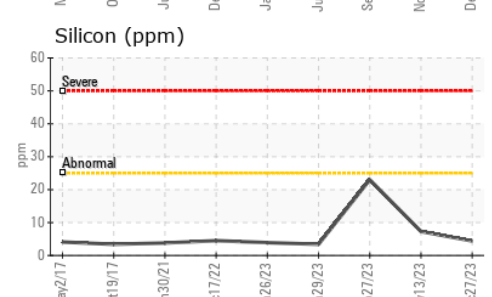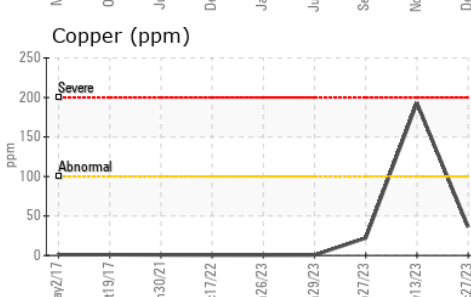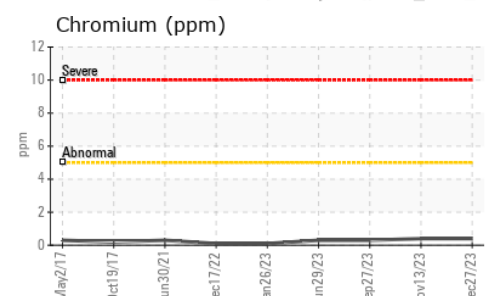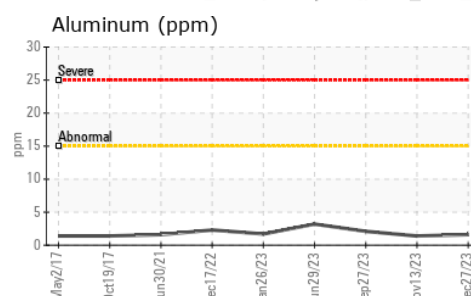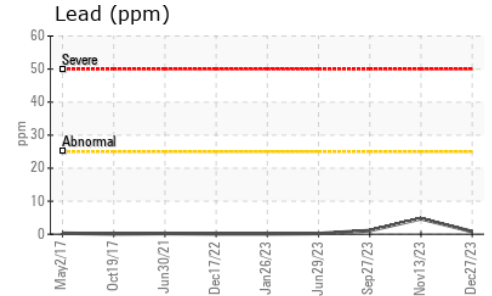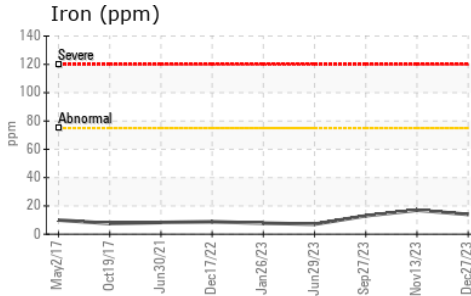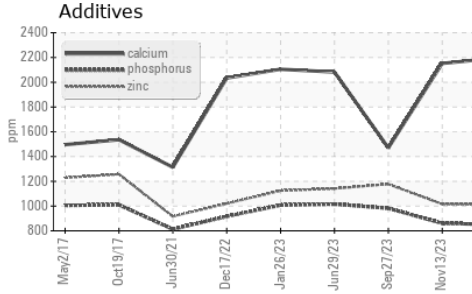

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0875071 **Received** : 08 Jan 2024
Lab Number : 02606929 **Diagnosed** : 08 Jan 2024
Unique Number : 5708015 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3
 Contact: Frank Mastromarco
 frank.mastromarco@mvttransit.com
 T: (709)792-5033
 F: