

# **OIL ANALYSIS REPORT**

RONI 174

Component **Hydraulic System** 

PETRO CANADA HYDREX AW 46 (--- GAL)

# Sample Rating Trend



# **DIAGNOSIS**

# Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

All component wear rates are normal.

# Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


# **Fluid Condition**

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION   method   limit/base   current   history1   history2				Jul2023	Dec2023		
Sample Date   Client Info   06 Dec 2023   14 Jul 2023	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age         hrs         Client Info         0         5594	Sample Number		Client Info		WC0872988	LH0270774	
Machine Age         hrs         Client Info         0         5594            Oil Age         hrs         Client Info         0         0            Oil Changed         Client Info         Changed            CONTAMINATION         method         limit/base         current         history1         history2           Water         WC Method         >0.1         NEG         NEG            WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM 05185(m)         >20         10         9            Chromium         ppm         ASTM 05185(m)         >10         0         0            Nickel         ppm         ASTM 05185(m)         10         0         0            Jiliver         ppm         ASTM 05185(m)         10         2         1            Lead         ppm         ASTM 05185(m)         10         2         1            Copper         ppm         ASTM 05185(m)         >10         0            Lead         ppm         ASTM	Sample Date		Client Info		06 Dec 2023	14 Jul 2023	
Client Info   Changed ABNORMAL   ABNORMA		hrs	Client Info		0	5594	
Sample Status	Oil Age	hrs	Client Info		0	0	
CONTAMINATION         method         limit/base         current         history1         history2           Water         WC Method         >0.1         NEG         NEG            WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM DS185(m)         >20         10         9            Chromium         ppm         ASTM DS185(m)         >10         <1         <1            Nickel         ppm         ASTM DS185(m)         0         0         0            Nickel         ppm         ASTM DS185(m)         10         0         0            Silver         ppm         ASTM DS185(m)         >10         2         1            Aluminum         ppm         ASTM DS185(m)         >10         2         1            Lead         ppm         ASTM DS185(m)         >10         0         0            Antimory         ppm         ASTM DS185(m)         >10         0         0            Antimory         ppm         ASTM DS185(m)         0         0	-		Client Info		Changed	Changed	
Water         WC Method         >0.1         NEG         NEG         ····           WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185(m)         >20         10         9         ····           Ohromium         ppm         ASTM D5185(m)         >10         0         0         ···           Nickel         ppm         ASTM D5185(m)         >10         0         0         ···           Silver         ppm         ASTM D5185(m)         >10         2         1         ···           Aluminum         ppm         ASTM D5185(m)         >10         21         0         ···           Aluminum         ppm         ASTM D5185(m)         >10         21         0         ···           Aluminum         ppm         ASTM D5185(m)         >10         0         0         ···           Copper         ppm         ASTM D5185(m)         >10         0         0         ···           Antimony         ppm         ASTM D5185(m)         0         0         0         ···           Vanadium         ppm         ASTM D5185(m)         0         0	Sample Status				_	ABNORMAL	
WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185(m)         >20         10         9            Chromium         ppm         ASTM D5185(m)         >10         0         0            Nickel         ppm         ASTM D5185(m)         >10         0         0            Silver         ppm         ASTM D5185(m)         0         0         0            Aluminum         ppm         ASTM D5185(m)         >10         2         1            Lead         ppm         ASTM D5185(m)         >10         0         0            Lead         ppm         ASTM D5185(m)         >10         0         0            Appear         ASTM D5185(m)         0         0         0            Vanadium         ppm         ASTM D5185(m)         0         0            Beryllium         ppm         ASTM D5185(m)         0         0         0            ADDITIVES         method         limit/base         current         history1         history2	CONTAMINATION	١	method	limit/base	current	history1	history2
Iron	Water		WC Method	>0.1	NEG	NEG	
Chromium         ppm         ASTM D5185(m)         >10         <1	WEAR METALS		method	limit/base	current	history1	history2
Chromium         ppm         ASTM D5185(m)         >10         <1	Iron	ppm	ASTM D5185(m)	>20	10	9	
Nickel	-		. ,		<1		
Titanium			\ /		0		
Silver	Titanium					0	
Aluminum ppm ASTM D5185(m) >10	Silver		( )		0		
Lead         ppm         ASTM D5185(m)         >10         <1         0            Copper         ppm         ASTM D5185(m)         >75         4         4            Tin         ppm         ASTM D5185(m)         >10         0         0            Antimony         ppm         ASTM D5185(m)         0         0            Vanadium         ppm         ASTM D5185(m)         0         0            Beryllium         ppm         ASTM D5185(m)         0         0			. ,	>10	-		
Copper         ppm         ASTM D5185(m)         >75         4         4            Tin         ppm         ASTM D5185(m)         >10         0         0            Antimony         ppm         ASTM D5185(m)         0         0            Vanadium         ppm         ASTM D5185(m)         0         0            Beryllium         ppm         ASTM D5185(m)         0         0            Cadmium         ppm         ASTM D5185(m)         0         0            ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         1         2            Barium         ppm         ASTM D5185(m)         0         0         0            Mangaese         ppm         ASTM D5185(m)         0         0         0            Magnesium         ppm         ASTM D5185(m)         50         128         123            Calcium         ppm         ASTM D5185(m)         30         456         494			( )		_		
Tin ppm ASTM D5185(m) >10 0 0 Antimony ppm ASTM D5185(m) 0 0 0 Antimony ppm ASTM D5185(m) 0 0 0 Beryllium ppm ASTM D5185(m) 0 0 0 Cadmium ppm ASTM D5185(m) 0 0 0  ADDITIVES method limit/base current history1 history2  Boron ppm ASTM D5185(m) 0 0 1 2 Barium ppm ASTM D5185(m) 0 0 0 0 Molybdenum ppm ASTM D5185(m) 0 0 0 0 Molybdenum ppm ASTM D5185(m) 0 0 0 0 Manganese ppm ASTM D5185(m) 0 0 0 0 Manganese ppm ASTM D5185(m) 0 1 2 Calcium ppm ASTM D5185(m) 50 128 123 Phosphorus ppm ASTM D5185(m) 330 456 494 Zinc ppm ASTM D5185(m) 430 568 570 Sulfur ppm ASTM D5185(m) 430 568 570 Sulfur ppm ASTM D5185(m) 760 1388 1339 Lithium ppm ASTM D5185(m) <-1 <-1 <-1 <  CONTAMINANTS method limit/base current history1 history2  Silicon ppm ASTM D5185(m) 220 4 4 FLUID CLEANLINESS method limit/base current history1 history2  Particles >4μm ASTM D5185(m) >20 <-1 1 1  FLUID CLEANLINESS method limit/base current history1 history2  Particles >4μm ASTM D7647 >5000 22 42 Particles >14μm ASTM D7647 >160 22 42 Particles >21μm ASTM D7647 >10 0 0 Particles >38μm ASTM D7647 >10 0 0 Particles >31			. ,			4	
Antimony			. ,		0	0	
Vanadium         ppm         ASTM D5185(m)         0         0            Beryllium         ppm         ASTM D5185(m)         0         0            Cadmium         ppm         ASTM D5185(m)         0         <1							
Beryllium         ppm         ASTM D5185(m)         0         0            Cadmium         ppm         ASTM D5185(m)         0         <1	,		\ /				
Cadmium         ppm         ASTM D5185(m)         0         <1	Bervllium		. ,			0	
ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185(m)         0         1         2            Barium         ppm         ASTM D5185(m)         0         0         0            Molybdenum         ppm         ASTM D5185(m)         0         0         0            Manganese         ppm         ASTM D5185(m)         0         1         2            Magnesium         ppm         ASTM D5185(m)         0         1         2            Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         50         128         123            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         >20         4         4            CONTAMINANTS         method         limit/base			( )				
Boron         ppm         ASTM D5185(m)         0         1         2            Barium         ppm         ASTM D5185(m)         0         0         0            Molybdenum         ppm         ASTM D5185(m)         0         0         0            Manganese         ppm         ASTM D5185(m)         0         1         2            Magnesium         ppm         ASTM D5185(m)         50         128         123            Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         330         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         >20         4         4            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)	ADDITIVES		method	limit/base	current	history1	history2
Barium	Boron	ppm	ASTM D5185(m)	0	1	2	
Molybdenum         ppm         ASTM D5185(m)         0         0            Manganese         ppm         ASTM D5185(m)         0         0         0            Magnesium         ppm         ASTM D5185(m)         0         1         2            Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         30         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1			. ,				
Manganese         ppm         ASTM D5185(m)         0         0         0            Magnesium         ppm         ASTM D5185(m)         0         1         2            Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         330         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1         <1            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4µm							
Magnesium         ppm         ASTM D5185(m)         0         1         2            Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         330         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         760         1388         1339            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         >20         41         4            Sodium         ppm         ASTM D5185(m)         >20         41         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >6µm         ASTM D7647		• •	. ,		-		
Calcium         ppm         ASTM D5185(m)         50         128         123            Phosphorus         ppm         ASTM D5185(m)         330         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1         <1            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         >20         <1         1            Sodium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4µm         ASTM D7647         >5000         27051         2128            Particles >21µm	•		1				
Phosphorus         ppm         ASTM D5185(m)         330         456         494            Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1         <1            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         >20         <1         1            Sodium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         27051         2128            Particles >21μm         ASTM D7647         >160         22         42            Particles >21μm         ASTM D7647         >40 <th></th> <th></th> <th>. ,</th> <th></th> <th>-</th> <th></th> <th></th>			. ,		-		
Zinc         ppm         ASTM D5185(m)         430         568         570            Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1         <1            CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         >20         <1         1            Sodium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         27051         2128            Particles >21μm         ASTM D7647         >160         22         42            Particles >21μm <t< th=""><th></th><th></th><th></th><th></th><th>_</th><th>494</th><th></th></t<>					_	494	
Sulfur         ppm         ASTM D5185(m)         760         1388         1339            Lithium         ppm         ASTM D5185(m)         <1			1 /				
Lithium ppm ASTM D5185(m) <1 <1  CONTAMINANTS method limit/base current history1 history2  Silicon ppm ASTM D5185(m) >20 4 4 4 Sodium ppm ASTM D5185(m) 3 3 3 Potassium ppm ASTM D5185(m) >20 <1 1 1  FLUID CLEANLINESS method limit/base current history1 history2  Particles >4μm ASTM D7647 >5000 27051 2128  Particles >6μm ASTM D7647 >1300 2903 459  Particles >14μm ASTM D7647 >160 22 42  Particles >21μm ASTM D7647 >40 3 8  Particles >38μm ASTM D7647 >10 0 0  Particles >71μm ASTM D7647 >3 0 0 0	-						
Silicon         ppm         ASTM D5185(m)         >20         4         4            Sodium         ppm         ASTM D5185(m)         3         3            Potassium         ppm         ASTM D5185(m)         >20         <1	Lithium		( )				
Sodium         ppm         ASTM D5185(m)         3         3            Potassium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         ≥ 27051         2128            Particles >6μm         ASTM D7647         >1300         ≥ 2903         459            Particles >14μm         ASTM D7647         >160         22         42            Particles >21μm         ASTM D7647         >40         3         8            Particles >38μm         ASTM D7647         >10         0         0            Particles >71μm         ASTM D7647         >3         0         0	CONTAMINANTS		method	limit/base	current	history1	history2
Sodium         ppm         ASTM D5185(m)         3         3            Potassium         ppm         ASTM D5185(m)         >20         <1         1            FLUID CLEANLINESS         method         limit/base         current         history1         history2           Particles >4μm         ASTM D7647         >5000         Δ 27051         2128            Particles >6μm         ASTM D7647         >1300         Δ 2903         459            Particles >14μm         ASTM D7647         >160         22         42            Particles >21μm         ASTM D7647         >40         3         8            Particles >38μm         ASTM D7647         >10         0         0            Particles >71μm         ASTM D7647         >3         0         0	Silicon	ppm	ASTM D5185(m)	>20	4	4	
Potassium         ppm         ASTM D5185(m)         >20         <1			. ,	-			
Particles >4μm       ASTM D7647       >5000       ▲ 27051       2128          Particles >6μm       ASTM D7647       >1300       ▲ 2903       459          Particles >14μm       ASTM D7647       >160       22       42          Particles >21μm       ASTM D7647       >40       3       8          Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0	Potassium		1 /	>20			
Particles >6μm       ASTM D7647       >1300       ▲ 2903       459          Particles >14μm       ASTM D7647       >160       22       42          Particles >21μm       ASTM D7647       >40       3       8          Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0	FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >6μm       ASTM D7647       >1300       ▲ 2903       459          Particles >14μm       ASTM D7647       >160       22       42          Particles >21μm       ASTM D7647       >40       3       8          Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0	Particles >4µm		ASTM D7647	>5000	<u>^</u> 27051	2128	
Particles >14μm       ASTM D7647       >160       22       42          Particles >21μm       ASTM D7647       >40       3       8          Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0				>1300			
Particles >21μm       ASTM D7647       >40       3       8          Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0	·						
Particles >38μm       ASTM D7647       >10       0       0          Particles >71μm       ASTM D7647       >3       0       0	r.						
Particles >71μm	Particles >21um		ASTM D7647	>40	3	8	
	Particles >38µm		ASTM D7647	>10	0	0	



# OIL ANALYSIS REPORT

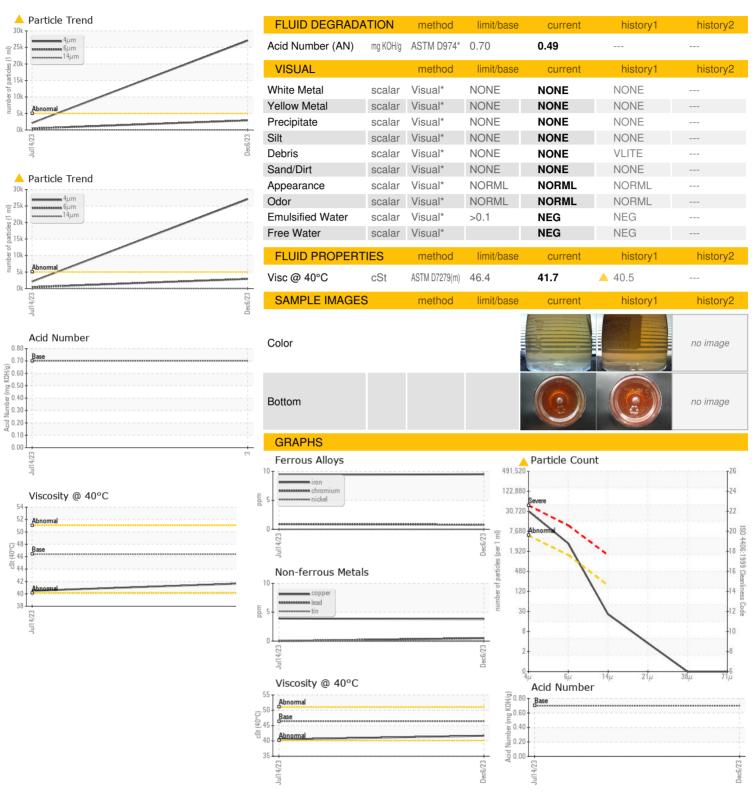



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

Test Package : MOBCE

: WC0872988 : 02607161 : 5708247

Recieved Diagnosed

: 08 Jan 2024 : 11 Jan 2024 : Wes Davis Diagnostician

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 RONI/IRON SHORE EXCAVATING LTD. 100 MACINTOSH BLVD VAUGHAN, ON

**CA L4K 4P3** Contact: Service Team service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

T: Validity of results and interpretation are based on the sample and information as supplied. F: