

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id 126 Component **Left Final Drive PETRO CANADA 30W**



Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The condition of the oil is acceptable for the time in service.

(GAL)						
` ,				Dec2023		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0888434		
Sample Date		Client Info		27 Dec 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATIO	NC	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>800	286		
Chromium	ppm	ASTM D5185(m)	>10	1		
Nickel	ppm	ASTM D5185(m)	>5	<1		
Titanium	ppm	ASTM D5185(m)	>15	3		
Silver	ppm	ASTM D5185(m)	>2	0		
Aluminum	ppm	ASTM D5185(m)	>75	69		
_ead	ppm	ASTM D5185(m)	>10	<1		
Copper	ppm	ASTM D5185(m)	>75	<1		
Γin	ppm	ASTM D5185(m)	>8	0		
Antimony	ppm	ASTM D5185(m)	>50	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		8		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		3		
Magnesium	ppm	ASTM D5185(m)		740		
Calcium	ppm	ASTM D5185(m)		1410		
Phosphorus	ppm	ASTM D5185(m)		1095		
Zinc	ppm	ASTM D5185(m)		1187		
Sulfur	ppm	ASTM D5185(m)		4006		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	'S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>400	280		
Sodium	ppm	ASTM D5185(m)		17		
Datassium		ACTM DE10F()	00	05		


25

Potassium

ppm ASTM D5185(m) >20




OIL ANALYSIS REPORT

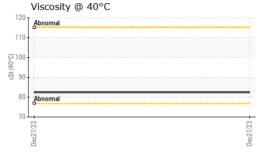

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	VLITE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.2	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		82.4		

SAMPLE IMAGES	method	limit/base	current	nistory1	history2
Color				no image	no image
Bottom				no image	no image
GRAPHS					

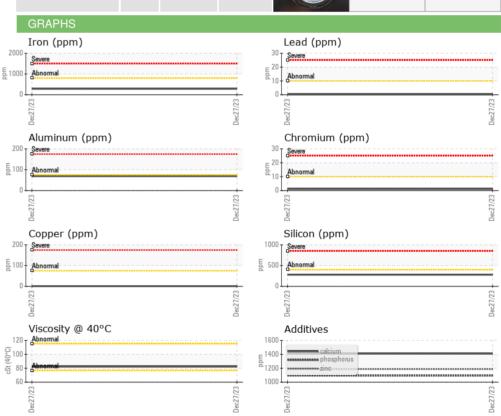



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number : 5708319

: WC0888434 : 02607233

Recieved

: 08 Jan 2024 Diagnosed : 09 Jan 2024

Diagnostician : Kevin Marson

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 RONI/IRON SHORE EXCAVATING LTD.

100 MACINTOSH BLVD VAUGHAN, ON CA L4K 4P3 Contact: Service Team

service.team@roni.ca

Test Package : MOBCE (Additional Tests: Visual) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T:

F: