




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

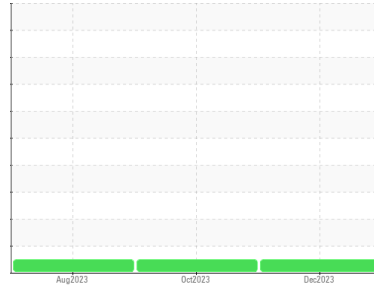

Machine Id  
**52938**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0837201</b>	WC0848038	WC0837238
Sample Date	Client Info		<b>27 Dec 2023</b>	07 Oct 2023	07 Aug 2023
Machine Age	mls	Client Info	<b>97964</b>	65030	32197
Oil Age	mls	Client Info	<b>32934</b>	38333	31613
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	1.2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>25</b>	28	64
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	3
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>10</b>	13	28
Lead	ppm	ASTM D5185(m)	>40	<b>4</b>	4	4
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	5	23
Tin	ppm	ASTM D5185(m)	>15	<b>1</b>	2	2
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	<b>1</b>	5	55
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	5
Molybdenum	ppm	ASTM D5185(m)	100	<b>59</b>	59	61
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	5
Magnesium	ppm	ASTM D5185(m)	450	<b>979</b>	890	449
Calcium	ppm	ASTM D5185(m)	3000	<b>1096</b>	1151	1695
Phosphorus	ppm	ASTM D5185(m)	1150	<b>999</b>	945	958
Zinc	ppm	ASTM D5185(m)	1350	<b>1199</b>	1169	1136
Sulfur	ppm	ASTM D5185(m)	4250	<b>2526</b>	2366	2347
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	10	38
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	4
Potassium	ppm	ASTM D5185(m)	>20	<b>19</b>	30	87

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.5</b>	7.9	8.6
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>19.9</b>	20.1	22.9











# OIL ANALYSIS REPORT

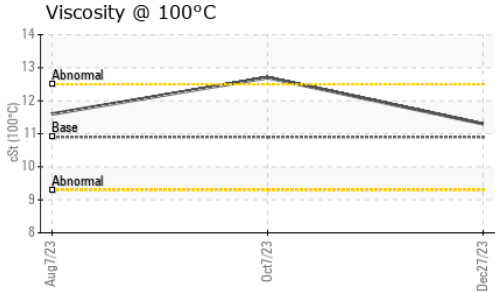

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.5</b>	16.3	18.6
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>11.3</b>	12.7	11.6

## GRAPHS

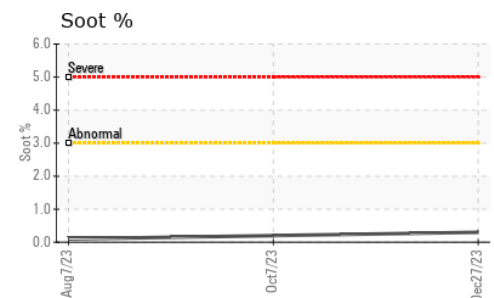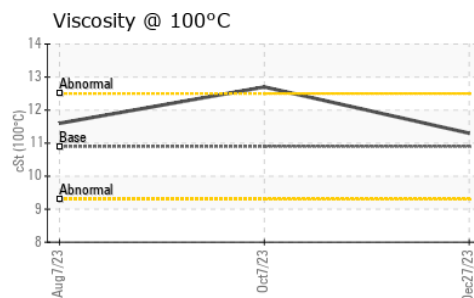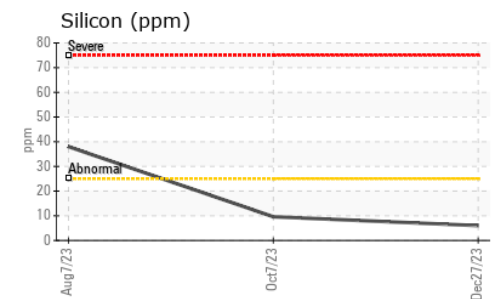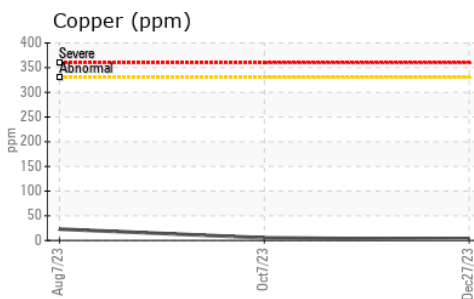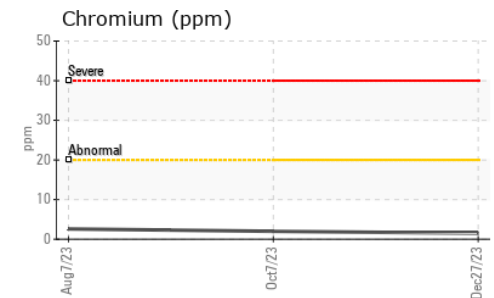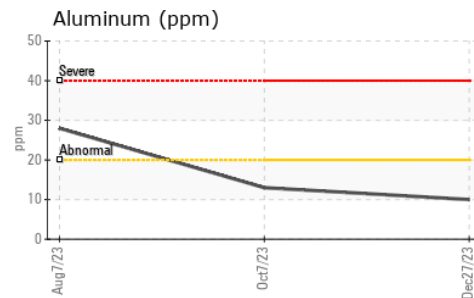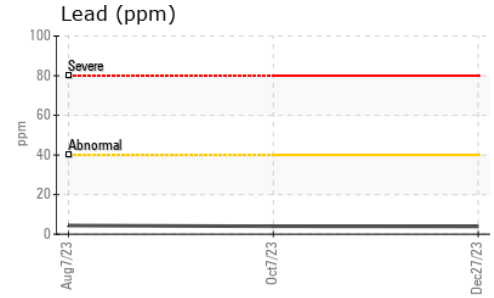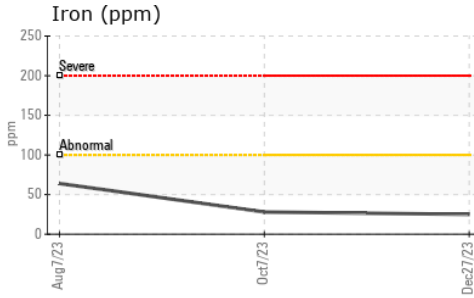

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOU LIN TRANSPORT (GARAGE)**  
**Sample No.** : WC0837201 **Received** : 09 Jan 2024 1335 SHAWSON DRIVE  
**Lab Number** : **02607409** **Diagnosed** : 09 Jan 2024 MISSISSAUGA, ON  
**Unique Number** : 5708495 **Diagnostician** : Wes Davis CA L4W 1C4  
**Test Package** : MOB 1 **Contact**: Travis Spence

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

tspence@manitoulintransport.com  
 T:  
 F: (905)564-6361