



OIL ANALYSIS REPORT


Sample Rating Trend

NORMAL

Area
3000 series
Machine Id
Navistar 3297

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

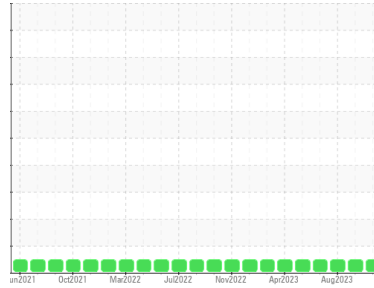

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0886682	WC0857908	WC0836019
Sample Date	Client Info		30 Dec 2023	15 Sep 2023	07 Aug 2023
Machine Age	mls	Client Info	499771	425150	403599
Oil Age	mls	Client Info	19621	21551	11200
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	38	27	19
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	9	7	6
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	2	2	1
Tin	ppm	ASTM D5185(m)	>15	<1	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	1	2	3
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	59	61	54
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	936	978	881
Calcium	ppm	ASTM D5185(m)	1050	1120	1124	974
Phosphorus	ppm	ASTM D5185(m)	995	963	1010	954
Zinc	ppm	ASTM D5185(m)	1180	1186	1237	1099
Sulfur	ppm	ASTM D5185(m)	2600	2533	2454	2504
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	17	4	3
Sodium	ppm	ASTM D5185(m)		2	2	2
Potassium	ppm	ASTM D5185(m)	>20	3	2	4

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	1.2	0.8	0.5
Nitration	Abs/cm	ASTM D7624*	>20	12.3	11.5	9.3
Sulfation	Abs./1mm	ASTM D7415*	>30	24.1	22.7	20.2



OIL ANALYSIS REPORT








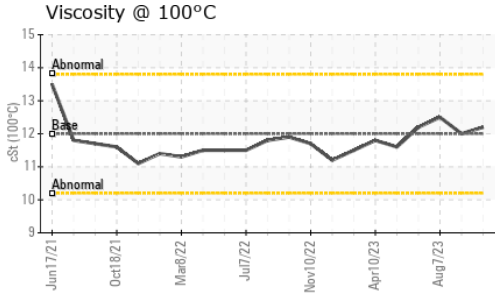


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.:1mm	ASTM D7414*	>25	18.9	19.3	16.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	12.2	12.0	12.5

GRAPHS

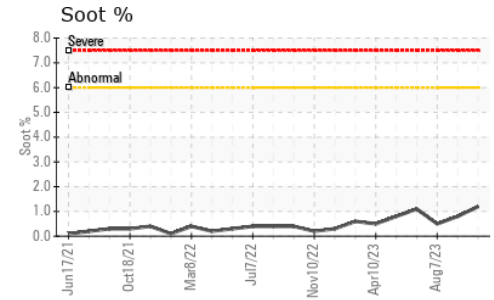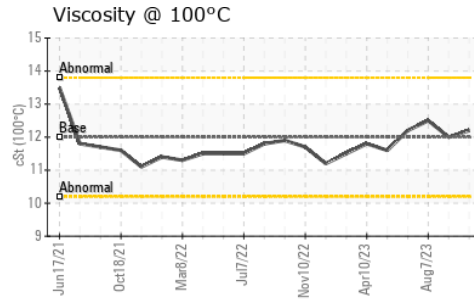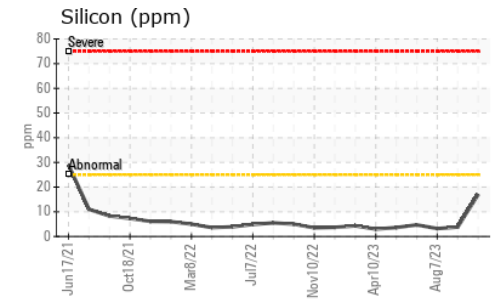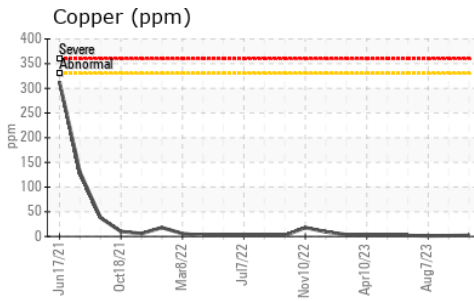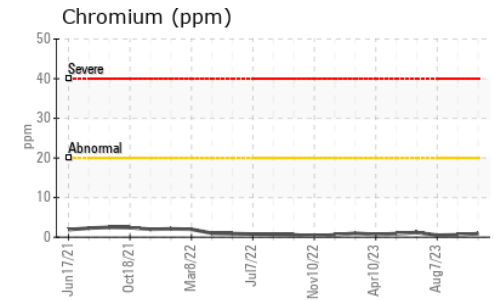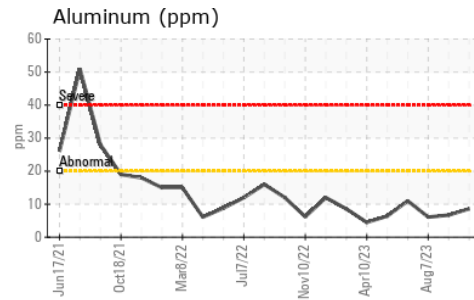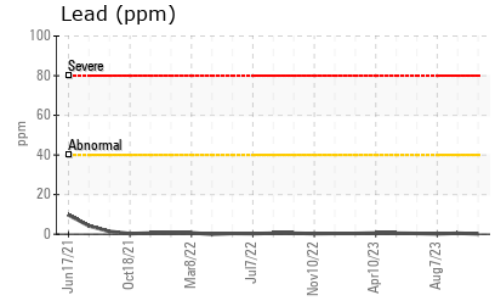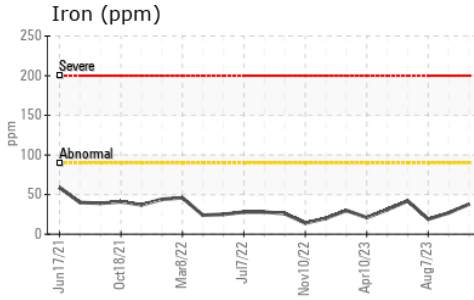

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOU LIN TRANSPORT (GARAGE)**
Sample No. : WC0886682 **Received** : 09 Jan 2024 1335 SHAWSON DRIVE
Lab Number : **02607413** **Diagnosed** : 09 Jan 2024 MISSISSAUGA, ON
Unique Number : 5708499 **Diagnostician** : Wes Davis CA L4W 1C4
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Travis Spence
 tspence@manitoulintransport.com
 T:
 F: (905)564-6361