



# OIL ANALYSIS REPORT


Sample Rating Trend

FUEL

Area  
**[7503]**  
Machine Id  
**9440**

Component  
**Diesel Engine**  
Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

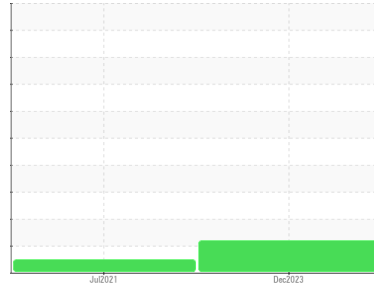

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0853295</b>	WC0580974	---
Sample Date	Client Info			<b>02 Dec 2023</b>	26 Jul 2021	---
Machine Age	kms	Client Info		<b>572368</b>	302710	---
Oil Age	kms	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>10</b>	12	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>4</b>	7	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	1	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>49</b>	217	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>4</b>	111	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	450	<b>683</b>	693	---
Calcium	ppm	ASTM D5185(m)	3000	<b>1287</b>	1424	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>693</b>	737	---
Zinc	ppm	ASTM D5185(m)	1350	<b>763</b>	797	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2583</b>	2156	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	7	---
Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	19	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	8	---
Fuel	%	ASTM D7593*	>3.0	<b>▲ 2.1</b>	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.3</b>	0.1	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.6</b>	8.9	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>19.4</b>	23.8	---



# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

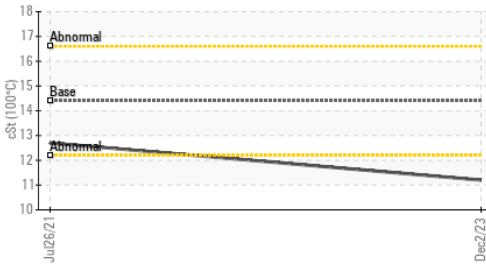

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	19.7	---

### VISUAL


method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	---
scalar	Visual*	NEG	NEG	---

### FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	▲ 11.2	12.7	---

### GRAPHS

▲ Fuel Dilution

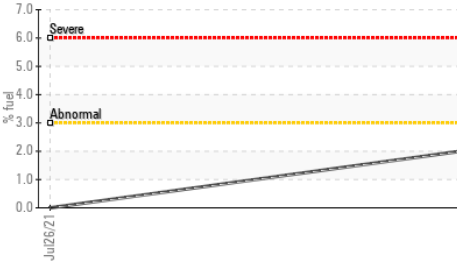


Iron (ppm)




Lead (ppm)




Aluminum (ppm)

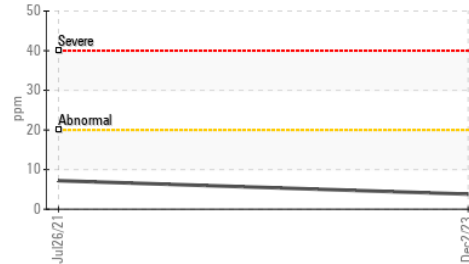


Chromium (ppm)

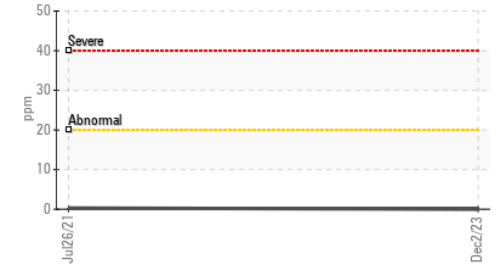


Copper (ppm)

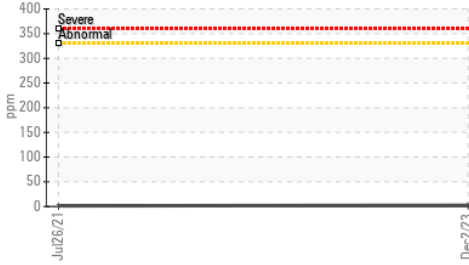


Silicon (ppm)

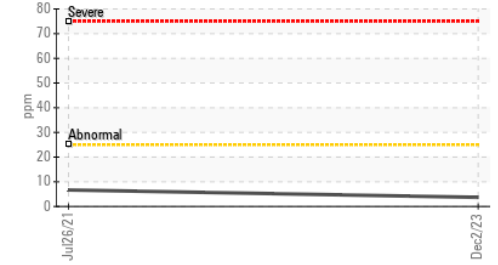

▲ Viscosity @ 100°C

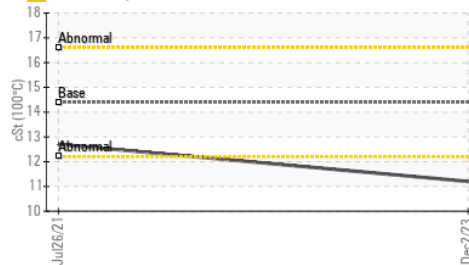

▲ Fuel Dilution

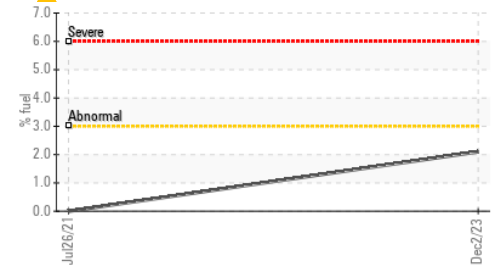

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0853295      Recieved : 09 Jan 2024  
 Lab Number : 02607463      Diagnosed : 10 Jan 2024  
 Unique Number : 5708549      Diagnostician : Wes Davis  
 Test Package : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

### Rush Truck Centres

7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F: